




# Common Mode Choke

## EPA3482S




- Ideal for LAN Applications
- For use with 10Base-T, Token Ring and 100 MBPS
- High Frequency Choke for EMI Reduction


### Electrical Parameters @ 25° C

OCL ( $\mu$ H Min.)	Turns Ratio ( $\pm 1\%$ )	DCR ( $\Omega$ Max.)	Hipot (Vrms)
@ 100 KHz, 100m Vrms			for 1 minute
40	1:1	0.6	500


### Schematic

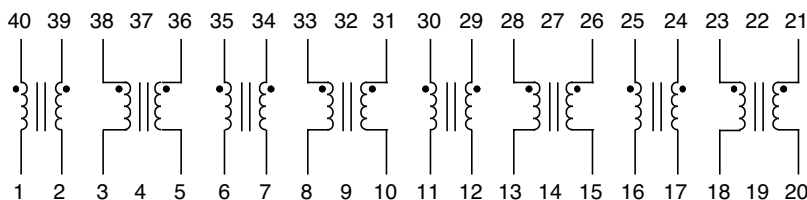

### Package

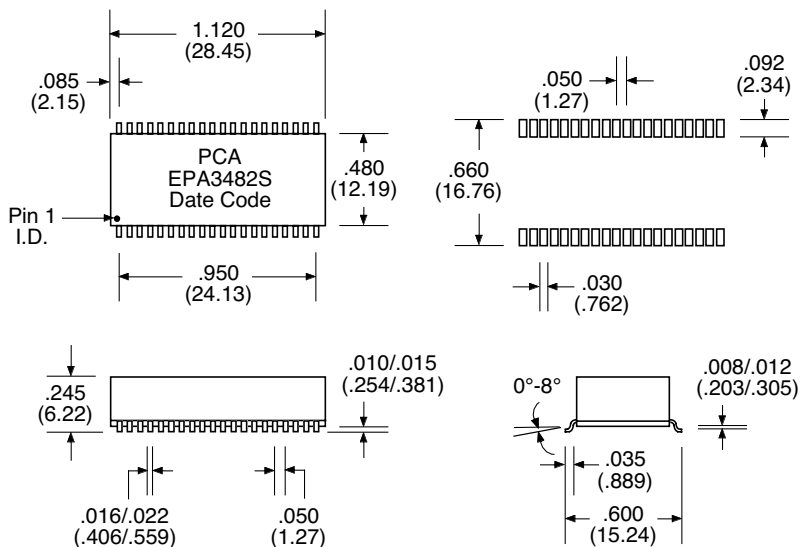

### Impedance Vs. Frequency

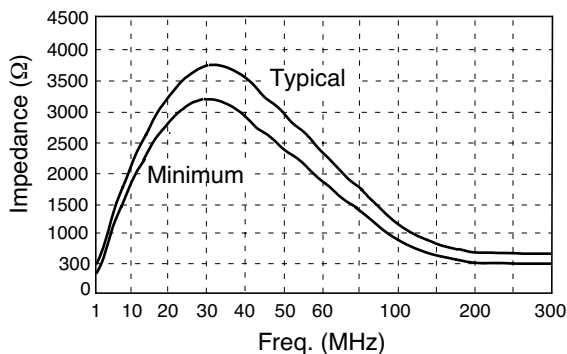

Unless Otherwise Specified Dimensions are in Inches /mm  $\pm .010 / .25$