



Common Mode Choke

EPA3685-X




- Used in AC Power Line Filtering
- UL 94V-0 Recognized Components
- UL 1446 Class B Insulation System
- Rated Voltage 250 Vac
- Self-Lead SMT


Electrical Parameters @ 25° C

Part Number	Inductance (mH $\pm$ 30%)	SRF (MHZ Typ.)	Rated Current {RMS} (Amp)	Impedance Curve	DCR (Ω Max.)	Package
EPA3685-1	1.0	4.0	3.6	1	.05	A
EPA3685-2	1.0	2.0	1.5	2	.06	B
EPA3685-3	3.0	2.2	2.5	3	.08	A
EPA3685-4	10.0	0.5	1.0	4	.45	B
EPA3685-5	22.0	0.3	0.5	5	.85	B


Schematic




Impedance Characteristic

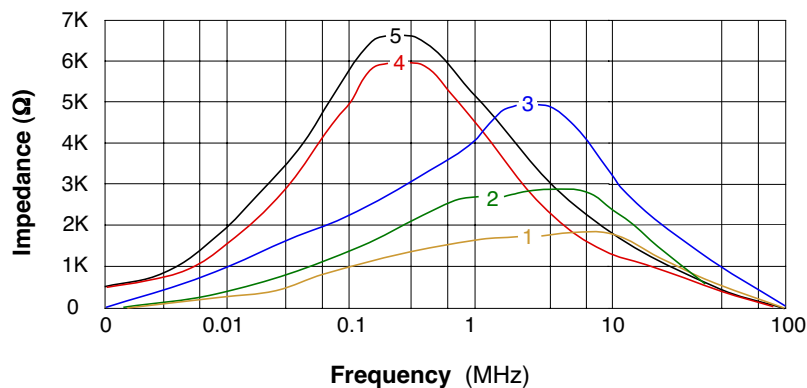

Package A

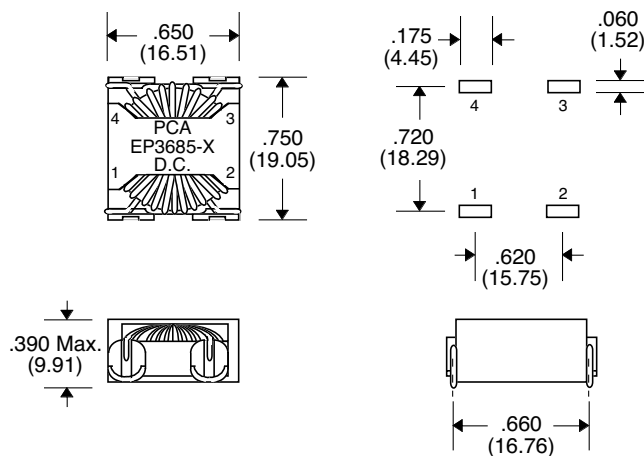

Package B

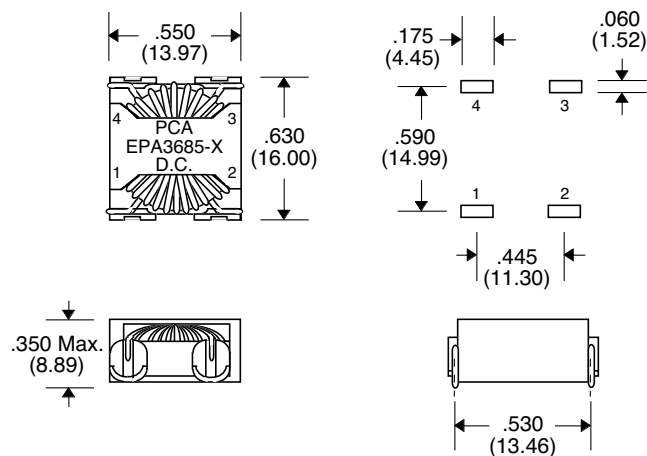

Unless Otherwise Specified Dimensions are in Inches /mm $\pm$.010 / .25

PCA ELECTRONICS, INC.
16799 SCHOENBORN ST.
NORTH HILLS, CA 91343

Product performance is limited to specified parameters. Data is subject to change without prior notice.
CSA3685-X Rev. 1 5/20/03

TEL: (818) 892-0761
FAX: (818) 894-5791
http://www.pca.com