

Token Ring 20 Pin Transceiver Module


Features

- Designed to interface with Texas Instrument's TI380C60
- Supports both STP and UTP Transmission
- IEEE 802.5 Compatible


Electrical Specifications @ 25°C

PCA Part Number		EPT7062				
Characteristic Impedance	150					
Insertion Loss Transmit	1-16 MHz	24 MHz	32 MHz	Return Loss Transmit	1-16 MHz	
	-0.8 dB Max.	-1.7 dB Max.	-7.0 dB Min.		-19.0 dB Min.	
Insertion Loss Receive	1-16 MHz	24 MHz		Return Loss Receive	1-16 MHz	
	-0.5 dB Max.	-0.5 dB Max.			-15.0 dB Min.	
Common Mode Rejection	1-20 MHz	100 MHz	Crosstalk	8 MHz	16 MHz	32 MHz
	-70.0 dB Typ.	-45.0 dB Typ.		-80.0 dB Typ.	-75.0 dB Typ.	-60.0 dB Typ.

Schematic

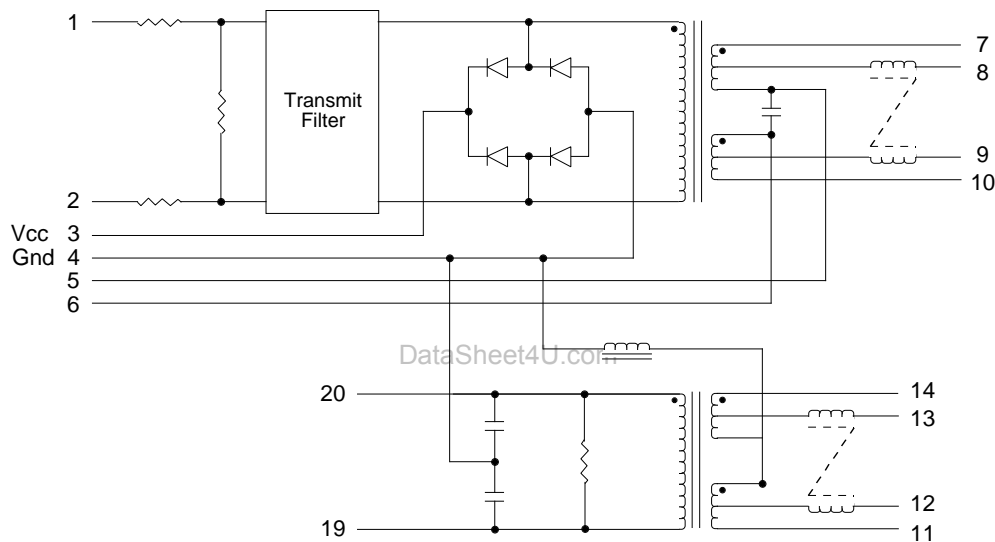

Package

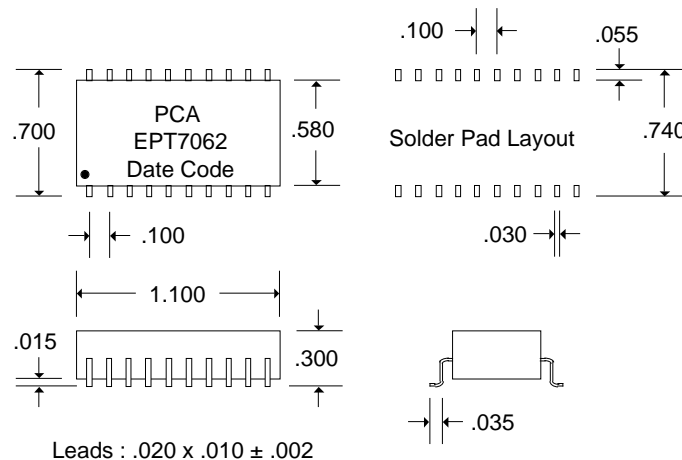

DST7062 Rev. B 8/17/95

QAF-CS07 8/10/94

Unless Otherwise Noted
Dimensions in Inches
Tolerances: Fractional = ± 1/32
.XX = ± .030 .XXX = ± .010



16799 SCHOENBORN ST.
NORTH HILLS, CA 91343

TEL: (818) 892-0761
FAX: (818) 894-5791
WEB: <http://www.pcainc.com>