



ER1004

FAST RECOVERY EPITAXIAL DIODE


SUPERFAST RECOVERY RECTIFIER

■ DESCRIPTION


The UTC **ER1004** is a superfast recovery rectifier, it uses UTC's advanced technology to provide customers with low forward voltage drop, high current capability and high efficiency, etc.

■ FEATURES

- * Low forward voltage drop
- * High current capability
- * High surge capacity
- * Low power loss
- * High efficiency
- * Super fast recovery times, high voltage

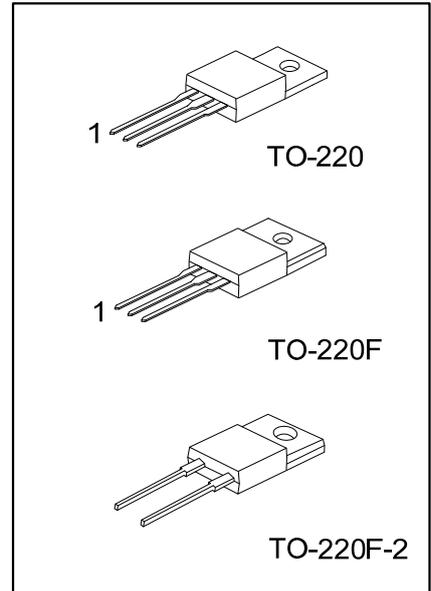

■ SYMBOL

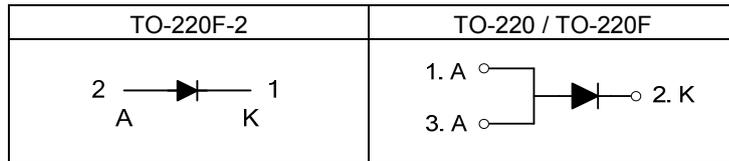


■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
ER1004L-TA3-R	ER1004G-TA3-R	TO-220	A	K	A	Tube
ER1004L-TF3-T	ER1004G-TF3-T	TO-220F	A	K	A	Tube
ER1004L-TF32-R	ER1004G-TF32-R	TO-220F-2	K	A	-	Tube

Note: Pin Assignment: A: Anode K: Common Cathode

<p>ER1004G-TA3-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) T: Tube (2) TA3: TO-220, TF3: TO-220F, TF32: TO-220F-2 (3) G: Halogen Free and Lead Free, L: Lead Free
--	--

■ MARKING

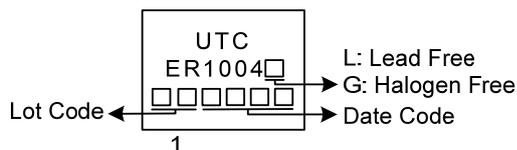

■ ABSOLUTE MAXIMUM RATINGS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitance load, derate current by 20%.

PARAMETER	SYMBOL	RATINGS	UNIT
Recurrent Peak Reverse Voltage	V_{RRM}	400	V
Average Average Forward Current at $T_C=100^\circ\text{C}$	I_O	10	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	110	A
Operating Junction Temperature	T_J	-55 ~ +150	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL CHARACTERISTICS (PER LEG)

PARAMETER	SYMBOL	RATINGS	UNIT
Typical Thermal Resistance	TO-220	2	°C/W
	TO-220F	4	°C/W
	TO-220F-2		

■ ELECTRICAL CHARACTERISTICS





Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitance load, derate current by 20%

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage Drop	V_F	$I_F=10\text{A}$			1.5	V
DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_J=25^\circ\text{C}$			10	μA
		$T_J=125^\circ\text{C}$			500	μA
Reverse Recovery Time (Note 2)	t_{rr}				60	ns
Junction Capacitance (Note 1)	C_J			62		pF

Notes: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Reverse Recovery Test Conditions: $I_F=5.0\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

■ TYPICAL CHARACTERISTICS

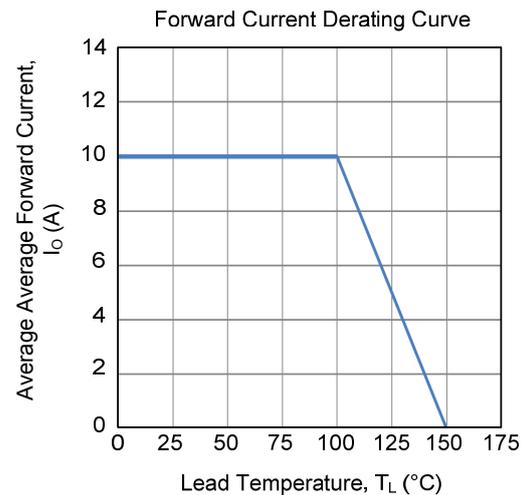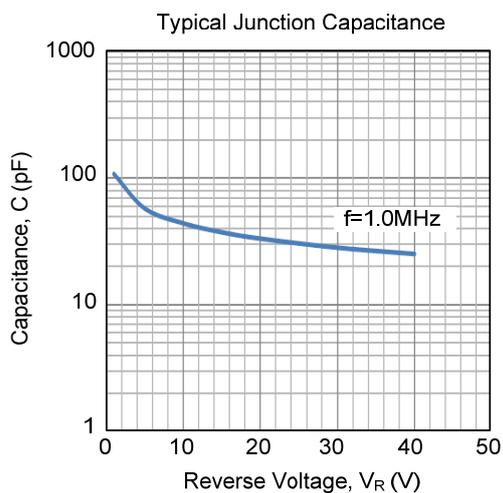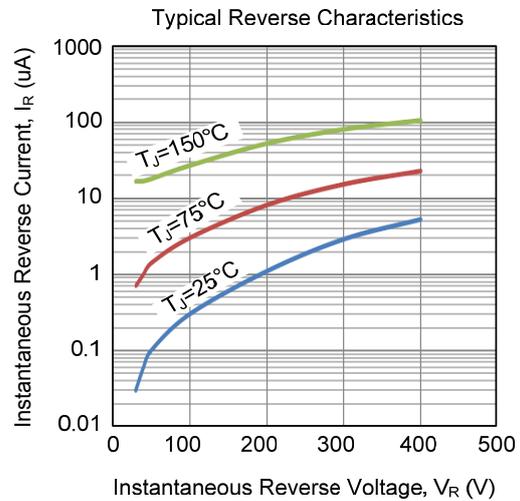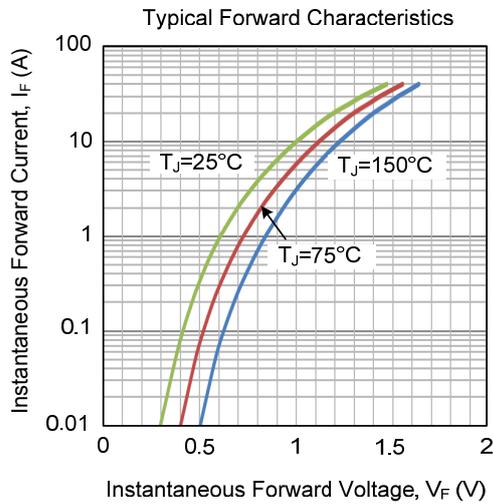

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.