

### SURFACE MOUNT RECTIFIER

VOLTAGE RANGE: 50 --- 600 V  
CURRENT: 3.0 A


#### FEATURES

- ◇ Low cost
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

#### MECHANICAL DATA

- ◇ Case: JEDEC DO-214AB, molded plastic
- ◇ Terminals: Solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.007 ounces, 0.21 grams
- ◇ Mounting position: Any

#### DO - 214AB(SMC)

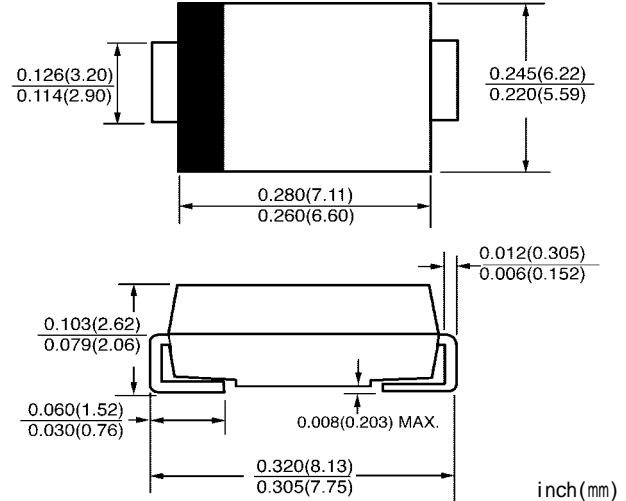

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		ER3A	ER3B	ER3C	ER3D	ER3E	ER3G	ER3J	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	V
Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	420	V
Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	600	V
Maximum average forward rectified current @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$	3.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	$I_{FSM}$	100							A
Maximum instantaneous forward voltage @ 3.0A	$V_F$	0.95			1.25		1.7		V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=125^\circ\text{C}$	$I_R$	5.0 300							$\mu\text{A}$
Maximum reverse recovery time (Note 1)	$t_{rr}$	35							ns
Typical junction capacitance (Note 2)	$C_J$	95							pF
Typical thermal resistance (Note 3)	$R_{\theta JA}$	20							$^\circ\text{C/W}$
Operating junction temperature range	$T_J$	- 55 ----- + 150							$^\circ\text{C}$
Storage temperature range	$T_{STG}$	- 55 ----- + 150							$^\circ\text{C}$


NOTE: 1. Measured with  $I_F=0.5\text{A}$ ,  $I_R=1\text{A}$ ,  $I_{rr}=0.25\text{A}$ .

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.


3. Thermal resistance junction to ambient.

www.galaxycn.com

**FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC**




NOTES: 1. RISE TIME = 7ns MAX INPUT IMPEDANCE = 1MΩ. 22pF.  
2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE = 50 Ω.




SET TIME BASE FOR 10 ns/cm


**FIG.2 – TYPICAL FORWARD CHARACTERISTIC**

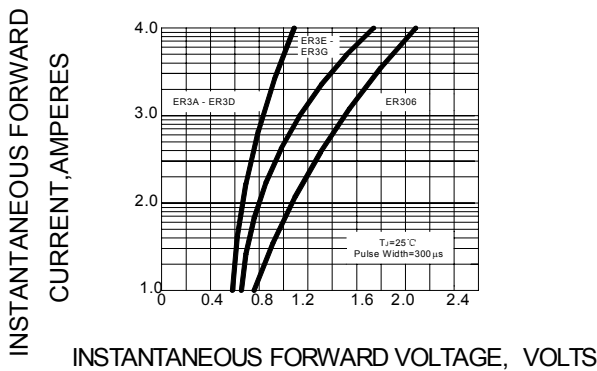


**FIG.3 – FORWARD DERATING CURVE**

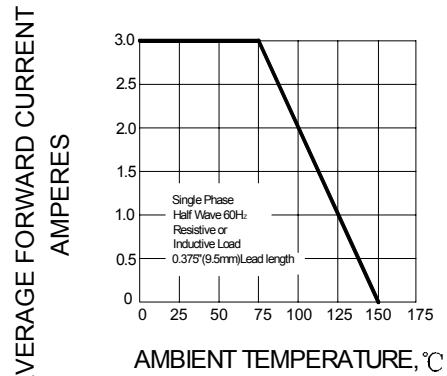

**FIG.4 – TYPICAL JUNCTION CAPACITANCE**

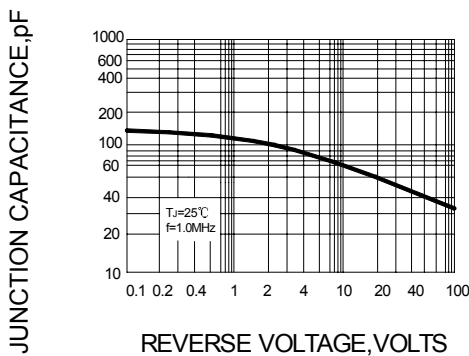

**FIG.5 – PEAK FORWARD SURGE CURRENT**

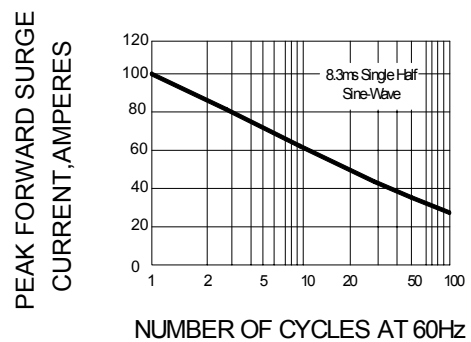

**FIG.6 – TYPICAL REVERSE CHARACTERISTICS**

