

Type: ER4831

◆ Product Description

- 49.0×34.0mm Max.(L×W), 33.0mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements




◆ Feature


- Max. Operating frequency 500kHz. Max. Operating power 60.0W(500kHz)
- Ideally used in Switching power supply etc.
- RoHS Compliance

www.DataSheet4U.com

◆ Dimensions (mm)

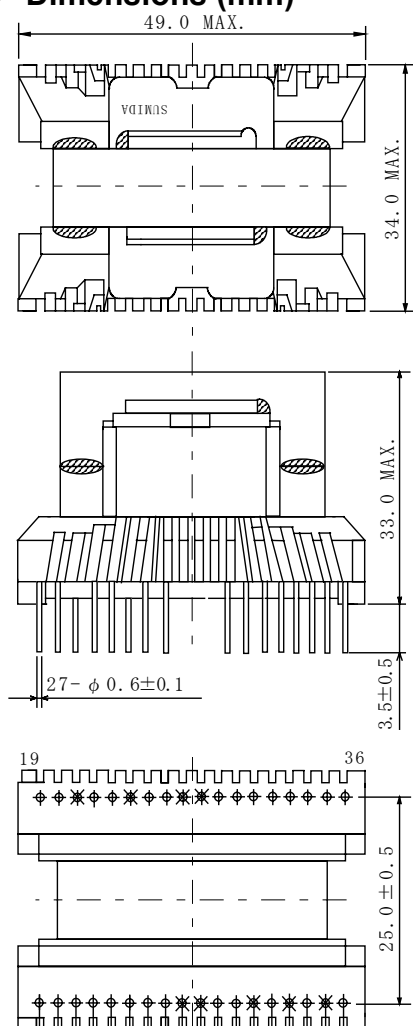

◆ Schematics (Bottom)

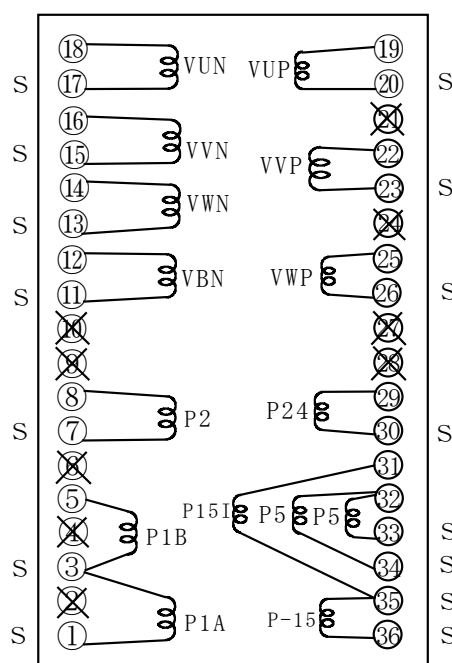

"S" is winding start

◆ Specification

Adhesive

Sample No.	Inductance (1-5) 1kHz/1V	D.C.R. (1-3)	Hi-pot Winding-winding (50/60Hz)	Hi-pot Winding-core (50/60Hz)
3342-T280	3.95mH±17%	1.90 Ω (Ref.)	AC2000Vrms/1min.	AC2000Vrms/1min