



Certificate Number: Q10561



Certificate Number: E17276

ERC81-004

SCHOTTKY-BARRIER RECTIFIER DIODE

PRV : 40 Volts
Io : 3.0 Amperes

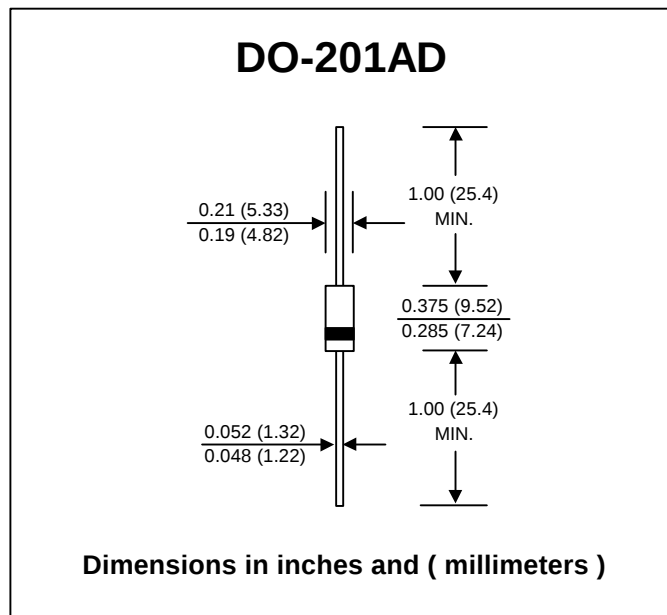
FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * High efficiency
- * Low power loss
- * Low forward voltage drop

MECHANICAL DATA :

- * Case : DO-201AD Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 1.16 grams

DataSheet4U.com



DataSheet4U.com

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	VALUE	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	40	V
Maximum DC Blocking Voltage	V_{DC}	40	V
Maximum Average Forward Current	$I_{F(AV)}$	3.0	A
Maximum Non-Repetitive Peak Forward Surge Current (Sin wave, 10ms)	I_{FSM}	120	A
Maximum Forward Voltage at $I_F = 3.0$ A	V_F	0.55	V
Maximum Reverse Current at $V_R = V_{RRM}$	I_R	5.0	mA
Junction Temperature Range	T_J	- 40 to + 125	°C
Storage Temperature Range	T_{STG}	- 40 to + 125	°C

DataSheet4U.com

www.DataSheet4U.com

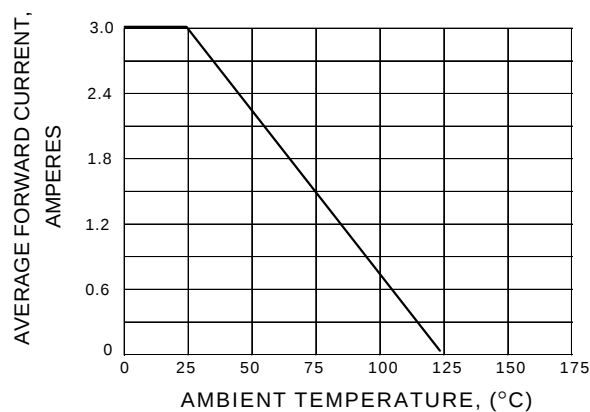
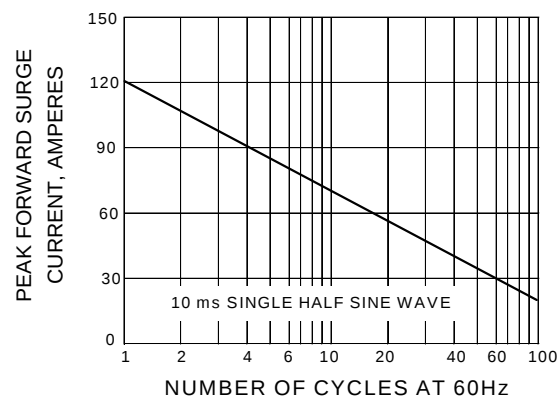
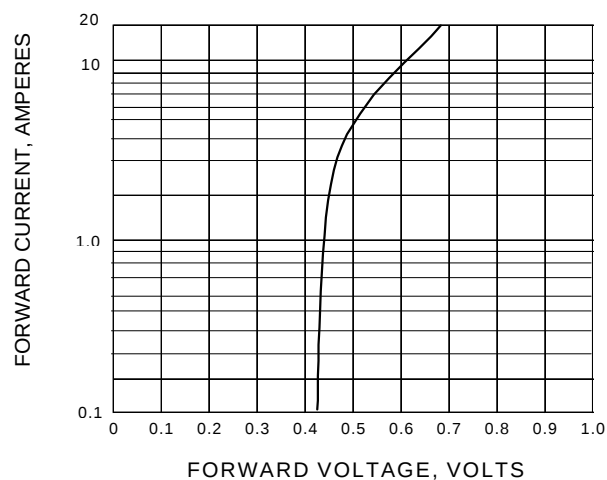


Certificate Number: Q10561



Certificate Number: E17276

RATING AND CHARACTERISTIC CURVES (ERC81-004)

FIG.1 - FORWARD CURRENT DERATING CURVE**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT****FIG.3 - TYPICAL FORWARD CHARACTERISTICS****FIG.4 - TYPICAL REVERSE CHARACTERISTICS**