



ES 1500 C

MEDIUM WAVE OSCILLATOR

RATING.

Filament Voltage	14.5
Filament Current (Amps)	28
Maximum Anode Voltage	7,500
Maximum Anode Dissipation (watts)	1,500
Amplification Factor	35
Mutual Conductance (mA/V)	2.2
Impedance (ohms)	16,000

DIMENSIONS.

Maximum Overall Length	550 mm.
Maximum Diameter	185 mm.

BASING.



Top Connexion	Anode
Bottom Connexion	Filament and Grid

GENERAL.

This valve has a hard glass envelope, and is constructed for use under more severe operating conditions than the ES 1500.

The maximum current capacity of the seals is 15.0 amps. H.F.

EDISWAN

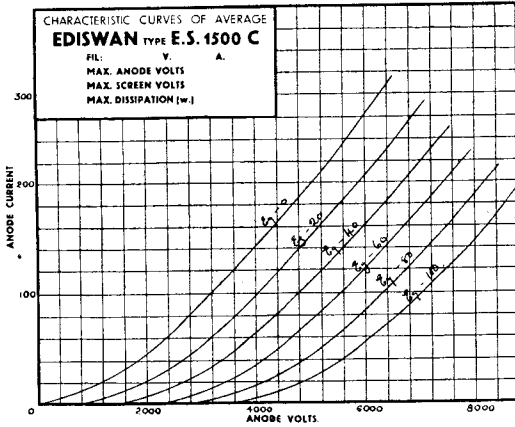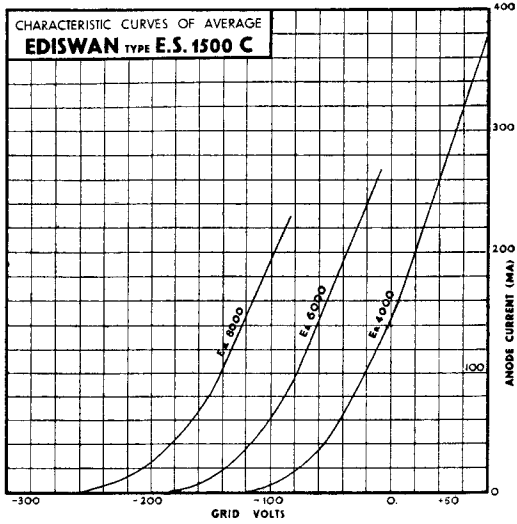

THE EDISON SWAN
ELECTRIC CO., LTD.



155, CHAR2NG CROSS RD.
LONDON, W.C.2.

EDISWAN RADIO