



ES2D

DIODE

SURFACE MOUNT SUPER FAST RECTIFIER

DESCRIPTION


The UTC **ES2D** is a surface mount super fast rectifier, it uses UTC's advanced technology to provide customers with high forward surge current and low reverse leakage, etc.

The UTC **ES2D** is suitable for surface mounted applications.

FEATURES

- * Low reverse leakage
- * High forward surge current capability

SYMBOL





ORDERING INFORMATION

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
ES2DL-SMB-R	ES2DG-SMB-R	SMB	K	A	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

ES2DG-SMB-R (1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel (2) SMB: SMB (3) G: Halogen Free and Lead Free, L: Lead Free
---	--

MARKING



SMB
(JEDEC DO-214AA)

■ ABSOLUTE MAXIMUM RATINGS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOL	RATINGS	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	200	V
RMS Voltage	V_{RMS}	140	V
DC Blocking Voltage	V_{DC}	200	V
Average Forward Rectified Current at $T_L=55^{\circ}\text{C}$	$I_{(AV)}$	2.0	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	60	A
Junction Temperature	T_J	-55 ~ +150	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient (Note 3)	θ_{JA}	34	°C/W

■ ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.






PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Instantaneous Forward Voltage	V_F	$I_F=2.0\text{A}$			0.95	V
DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_A=25^{\circ}\text{C}$			5	μA
		$T_A=100^{\circ}\text{C}$			150	μA
Reverse Recovery Time (Note 1)	t_{rr}				35	ns
Junction Capacitance (Note 2)	C_J				25	pF

Notes: 1. Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$.

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. P.C.B. mounted with 0.2×0.2" (5.0×5.0mm) copper pad areas.

■ TYPICAL CHARACTERISTICS

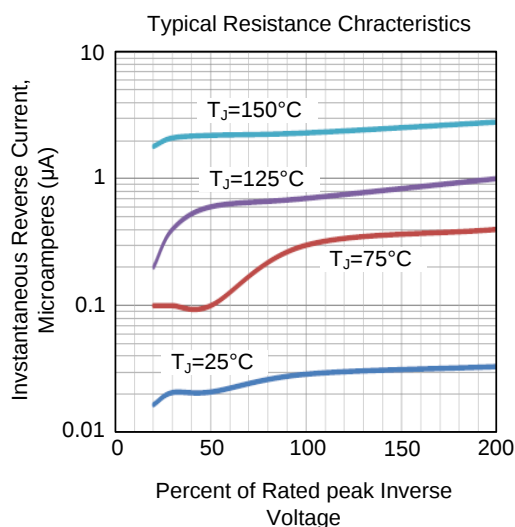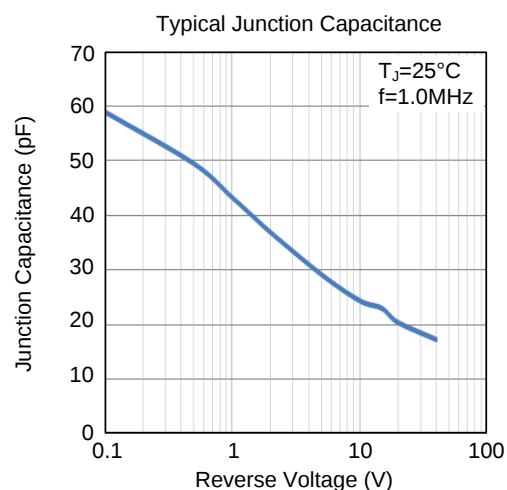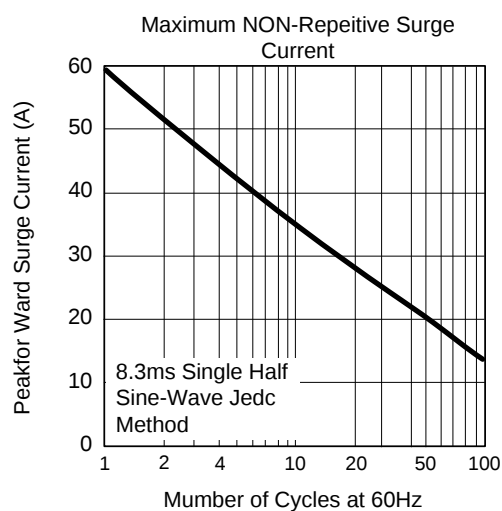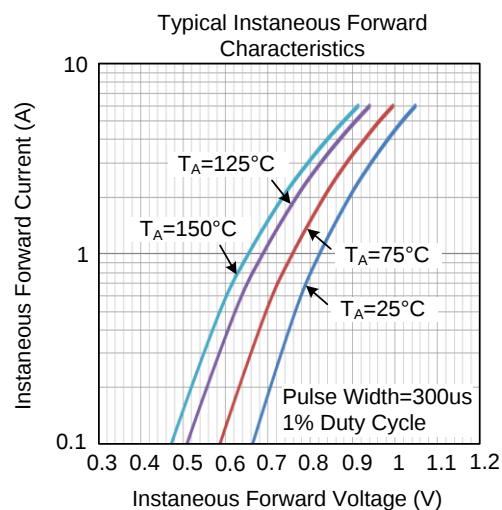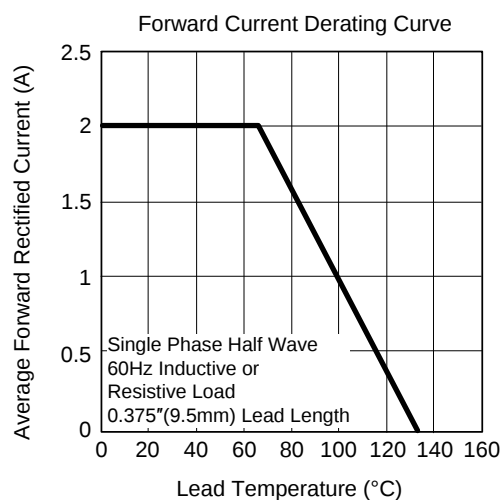

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.