

ESJA08

(8kV/5mA)

HIGH VOLTAGE DIODE

ESJA08 is high reliability resin molded type high voltage diode in small size package which is sealed (a multilayered mesa type silicon chip) by epoxy resin.

Features

- Ultra high speed switching
- Low VF
- High surge resistivity for CRT discharge
- High reliability design
- Ultra small package

Applications

- Rectification for CRT display monitor high voltage power supply (FBT:Flyback Transformer)

Maximum Ratings and Characteristics


- Absolute Maximum Ratings

Items	Symbols	Condition	ESJA08	Units
Repetitive Peak Reverse Voltage	V_{RRM}		8	kV
Average Output Current	I_o		5	mA
Surge Current	I_{FSM}	Ta=25°C, Resistive Load	0.5	A
Junction Temperature	T_j	10mS Sine-half wave peak value	120	°C
Allowable Operation Case Temperature	T_c		100	°C
Storage Temperature	T_{stg}		-40 to +120	°C

- Electrical Characteristics (Ta=25°C Unless otherwise specified)

Items	Symbols	Conditions	ESJA08	Units
Maximum Forward Voltage Drop	V_F	$I_F=10mA$	28	V
Maximum Reverse Current	I_R	$V_R=V_{RRM}$	2	μA
Maximum Reverse Recovery Time	t_{rr}	Ta=25°C, $I_F=2mA$, $I_R=4mA$	0.05	μs
Junction Capacitance	C_j	Ta=25°C, $V_R=0V$, $f=1MHz$	2	pF

Outline Drawings

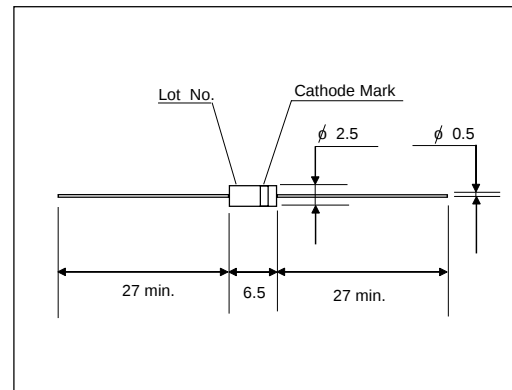

Cathode Mark

Type	Mark
ESJA08-08	

ESJA08 (8kV/5mA)

Characteristics

