



M/A-COM

ISO 9001  
CERTIFIED

# E-Series Surface Mount Mixer 1 - 1000 MHz

## ESMD-C1

### Features

- LO Power +7 dBm
- Up to +1 dBm RF
- Surface Mount

### Specifications @ 25°C

Frequency Range	
RF	1 - 1000 MHz
LO	1 - 1000 MHz
IF	DC - 1000 MHz

Conversion Loss (dB)	Typical	
2 - 500 MHz	6.5	7.5
1 - 1000 MHz	7.5	9.5

Isolation (dB)	Typical		Minimum
LO to RF			
1 - 10 MHz	60		45
10 - 500 MHz	45		30
500 - 1000 MHz	40		25
LO to IF			
1 - 10 MHz	60		40
	35		23


### Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	+ 1 dBm

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature ( 10 Seconds )	260°C

SM-2

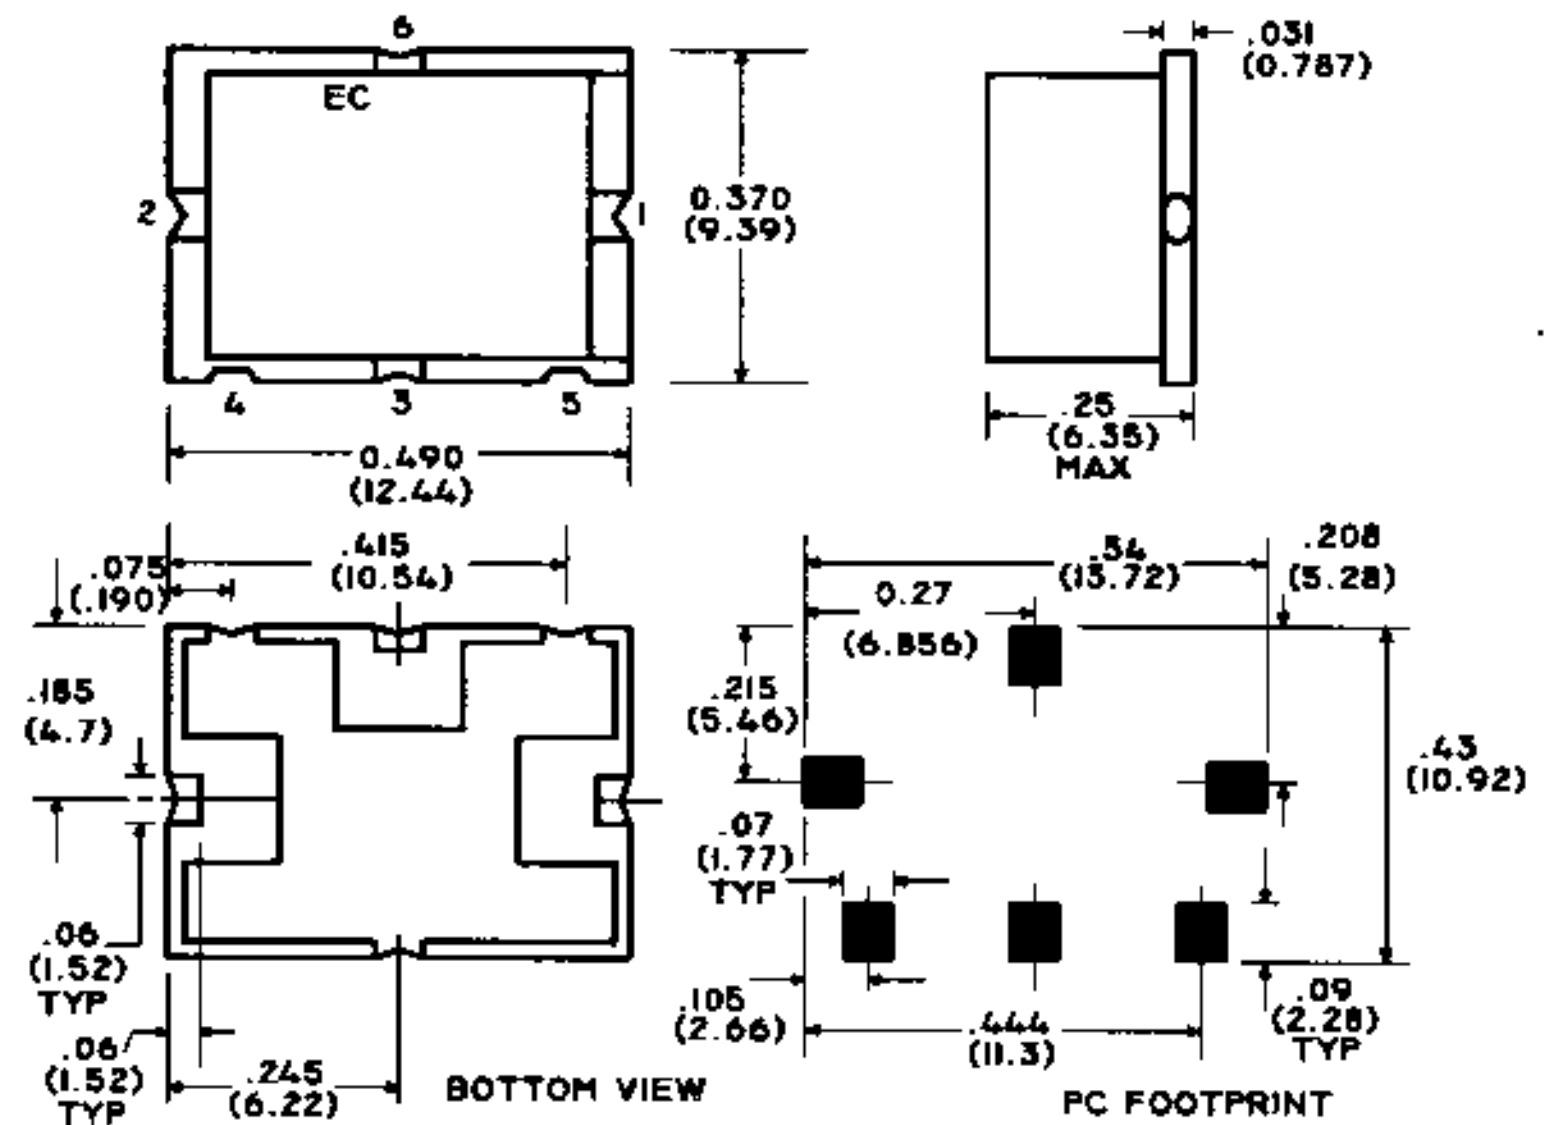

Function	Pin No.
LO	2
RF	1
IF	3
Ground	4,5,6
Case Ground	-
Unconnected	-