


ET10005 THRU ET1010

10 Amperes High Power Super Fast Rectifiers
VOLTAGE : 50 TO 1000Volts

Features	Outline
----------	---------

- Low power loss, high efficiency.
- High surge current capability.
- Super fast recovery time for switching mode application.
- Low power loss.
- Glass passivated chip junctions.
- Suffix "G" indicates Halogen-free part, ex.ET10005G.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

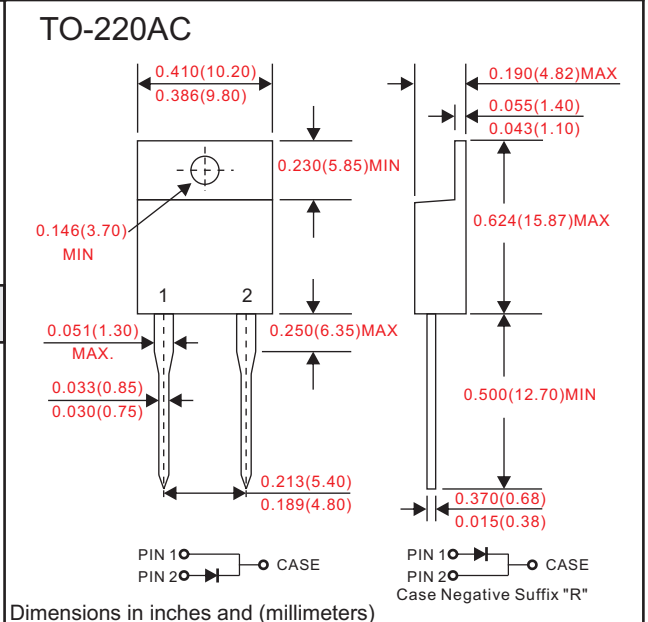

Mechanical data

- Epoxy : UL94-V0 rated flame retardant.
- Case : JEDEC TO-220AC molded plastic body over passivated chip.
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed.
- Polarity: Color band denotes cathode end.
- Mounting Position : Any.
- Weight : Approximated 1.86 gram.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	ET10005	ET1001	ET1002	ET1004	ET1006	ET1008	ET1010	UNIT	
Making code		ET10005	ET1001	ET1002	ET1004	ET1006	ET1008	ET1010		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700		
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000		
Maximum Forward Voltage@10A, $T_A = 25^\circ C$	V_F	0.95			1.30	1.70			V	
Maximum reverse recovery time(1) @ $T_J = 25^\circ C$	T_{rr}	35			50				ns	
Operating Temperature	T_J	-50 ~ +150								°C

Note : 1. $I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A$

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current		I_o			10	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC methode)	I_{FSM}			150	A
Reverse current	$V_R = V_{RRM}, T_A = 25^\circ C$	I_R			1.0	uA
	$V_R = V_{RRM}, T_A = 125^\circ C$				300	
Typical junction capacitance	f=1MHz and applied 4V DC reverse voltage	C_J		62		pF

ET10005 THRU ET1010

10 Amperes High Power Super Fast Rectifiers
VOLTAGE : 50 TO 1000Volts

Rating and characteristic curves

Fig.1 - Forward Current Derating Curve

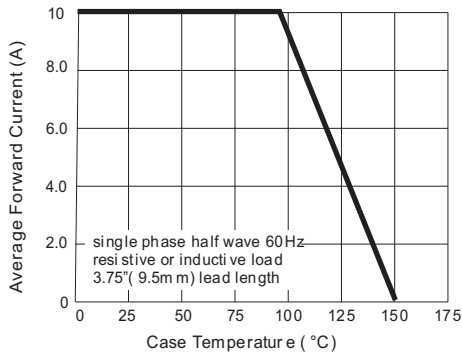


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

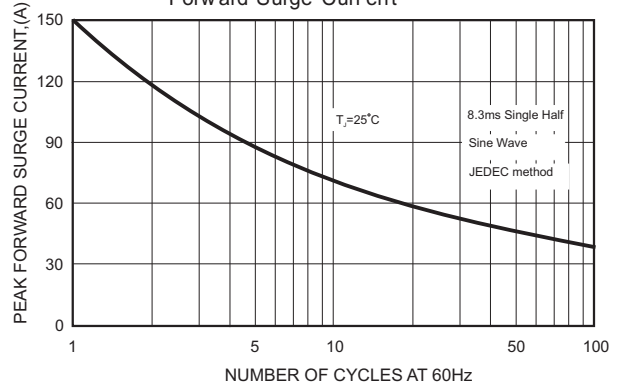


Fig. 3 - Typical Instantaneous Forward Characteristics

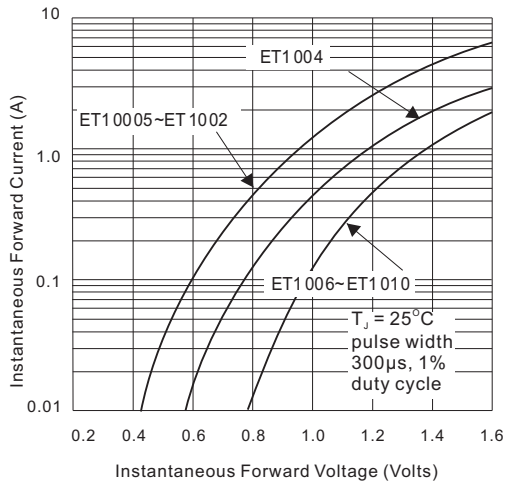


Fig. 4 - Typical Reverse Characteristics

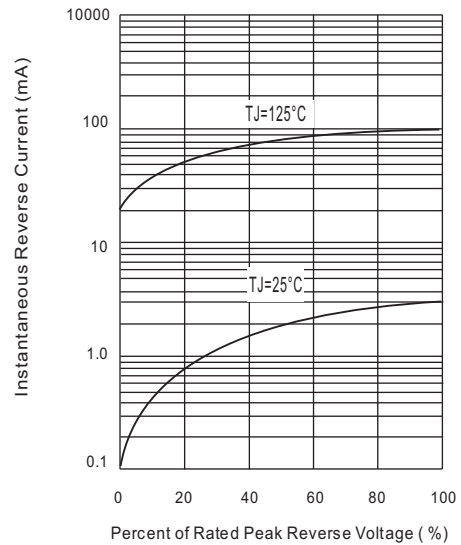


Fig. 5 - Typical Junction Capacitance

