

HIGH HEAT RESISTIVITY

DESCRIPTION

The new NEC TOKIN ET2F/ET1F series is PC-board mount type automotive relay suitable for various motor and heater control applications that require a high quality and performance. ET2F is a twin relay type and ET1F is a single relay type. The operate temperature range for ET2F/ET1F series is -40°C through $+125^{\circ}\text{C}$.

By this high heat resistivity, the contact carrying current of ET2F/ET1F series at 25°C increases 1.3 to 1.4 times compared with that of ET2/ET1 series.

FEATURES

- Operating ambient temperature up to $+125^{\circ}\text{C}$ (ET2/ET1 : $+85^{\circ}\text{C}$)
- Suitable for motor and solenoid reversible control
- High performance and productivity by unique structure
- Flux tight housing

APPLICATIONS

- Motor control
- Heater control
- Solenoid control



Type ET2F



Type ET1F

For Proper Use of Miniature Relays

DO NOT EXCEED MAXIMUM RATINGS.

Do not use relays under exceeding conditions such as over ambient temperature, over voltage and over current. Incorrect use could result in abnormal heating and damage to relay or other parts.

READ CAUTIONS IN THE SELECTION GUIDE.

Read the cautions described in NEC/TOKIN's "Miniature Relays" (0123EMDD03VOL01E) before dose designing your relays applications.

The information in this document is subject to change without notice.


Date Published August 2002 M
Printed in Japan

© NEC TOKIN Corporation 2002




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.


ET2F




ET2F

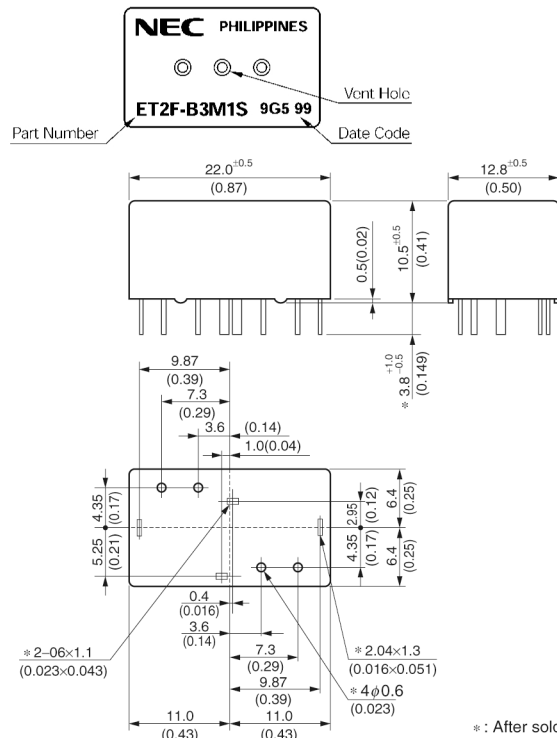


ET1F

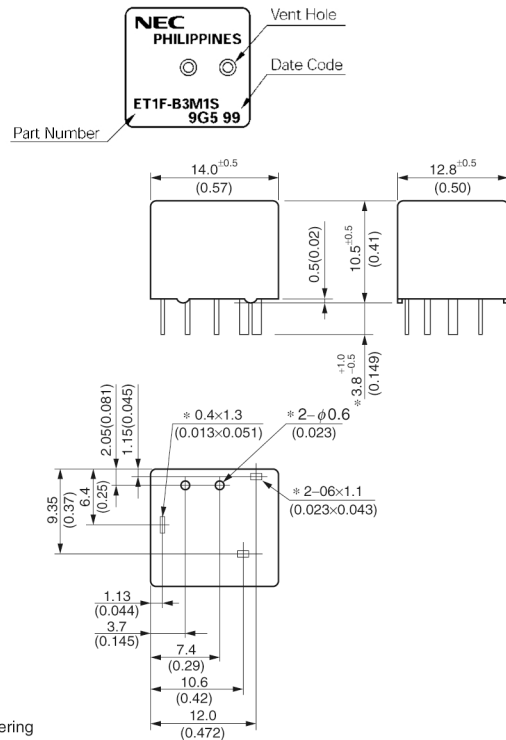

ET2F

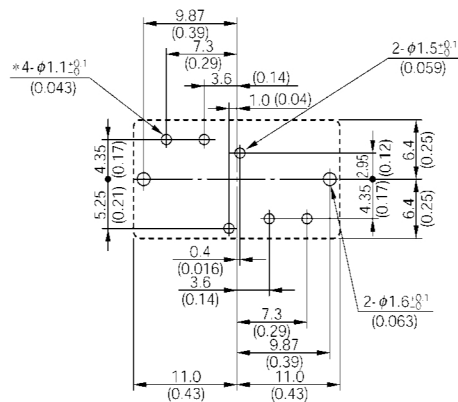

ET1F

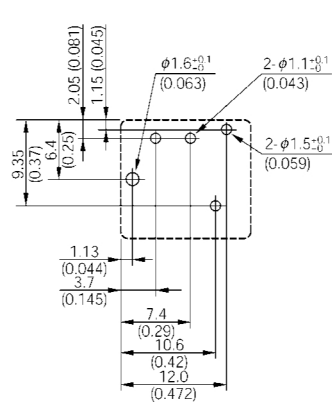

SPECIFICATIONS

(at 20°C)

Items		Type	Twin	Single
			ET2F-B3M1/ET2F-B3M1S	ET1F-B3M1/ET1F-B3M1S
Contact Form			1 Form c × 2 (H Bridge)	1 Form c
Contact Ratings		Max. Switching Voltage	16 V dc	
		Max. Switching Current	25 A (at 16 Vdc)	
		Max. Carrying Current	25 A (2 minutes 12 Vdc at 125°C) 30 A (2 minutes 12 Vdc at 85°C) 35 A (2 minutes 12 Vdc at 20°C)	30 A (2 minutes 12 Vdc at 125°C) 35 A (2 minutes 12 Vdc at 85°C) 40 A (2 minutes 12 Vdc at 20°C)
		Min. Switching Current	1 A (at 5 Vdc)	
		Contact Resistance	4 mΩ typical (measured at 7 A) Initial	
Contact Material			Silver oxide complex alloy	
Operate Time (Excluding Bounce)			2.5 ms typical (at Nominal Voltage)	
Release Time (Excluding Bounce)			3 ms typical (at Nominal Voltage, with diode) Initial	
Nominal Operating Power			640 mW	
Insulation Resistance			100 MΩ at 500 Vdc	
Breakdown Voltage		Between Open Contacts	500 Vdc min. (for 1 minute)	
		Between Coil and Contacts	500 Vdc min. (for 1 minute)	
Shock Resistance		Misoperation	98 m/s ² (10 G)	
		Destructive Failure	980 m/s ² (100 G)	
Vibration Resistance		Misoperation	10 to 300 Hz, 43 m/s ² (4.4 G)	
		Destructive Failure	10 to 500 Hz, 43 m/s ² (4.4 G) 200 hour	
Ambient Temperature			-40 to +125°C (-40 to +257°F)	
Coil Temperature Rise			70°C (158°F) / W (without contact carrying current)	
Life Expectancy	Mechanical		1 × 10 ⁶ operations	
	Electrical	Power Window Motor (14 V, 20 A locked)	100 × 10 ³ operations	
		Power Window Motor (14 V, 20 A / 3 A, Unlocked)	100 × 10 ³ operations	
Weight			Approx. 7.5 g (0.26 oz)	Approx. 4.5 g (0.16 oz)

COIL RATING

◆ SEALED TYPE

(at 20°C)

Contact Form		Part Number	Nominal Voltage (Vdc)	Coil Resistance (Ω ±10%)	Must Operate Voltage (Vdc)	Must Release Voltage (Vdc)
Twin	1 Form c × 2	ET2F-B3M1S	12	225	6.5	0.9
Single	1 Form c	ET1F-B3M1S				

◆ UNSEALED TYPE

(at 20°C)


Contact Form		Part Number	Nominal Voltage (Vdc)	Coil Resistance (Ω ±10%)	Must Operate Voltage (Vdc)	Must Release Voltage (Vdc)
Twin	1 Form c × 2	ET2F-B3M1	12	225	6.5	0.9
Single	1 Form c	ET1F-B3M1				



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.


NUMBERING SYSTEM

ET2 F-B3M1S

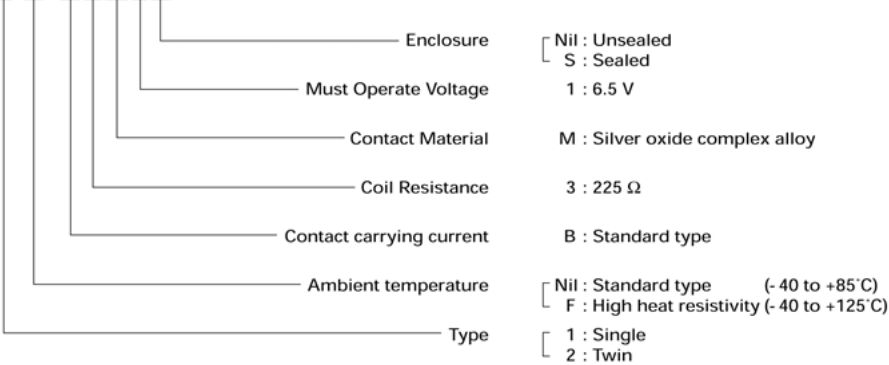

COIL TEMPERATURE RISE


Test piece : ET1F-B3M1S

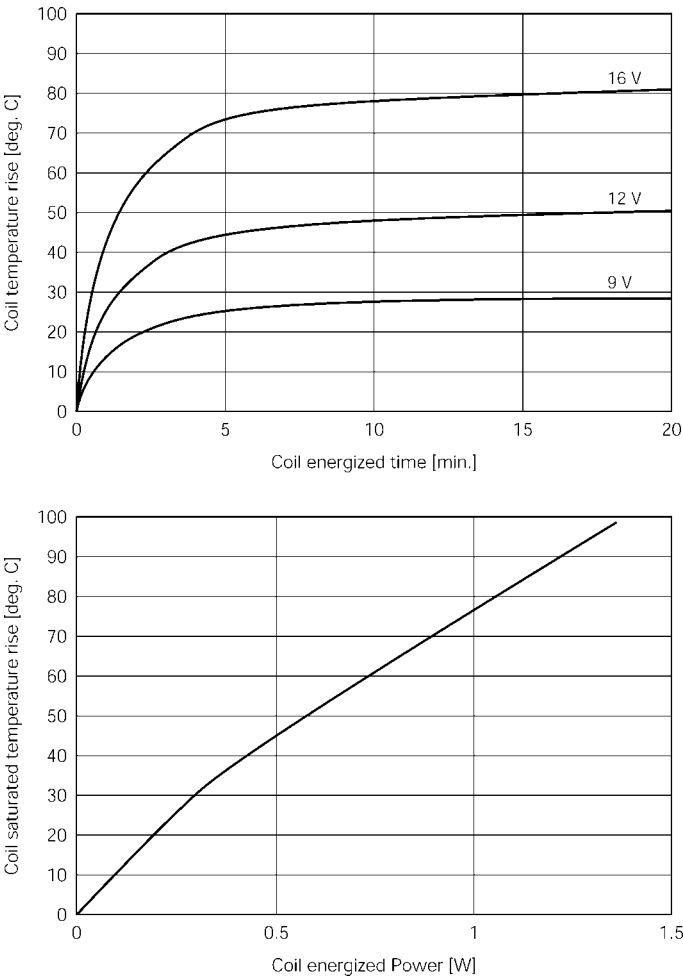






- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

RELAY CHARACTERISTICS DISTRIBUTION (INITIAL)

Samples : ET1F-B3M1S 100 pieces

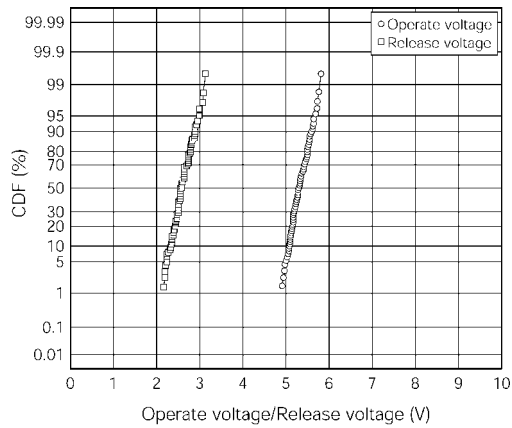


Samples : ET2F-B3M1S 100 pieces

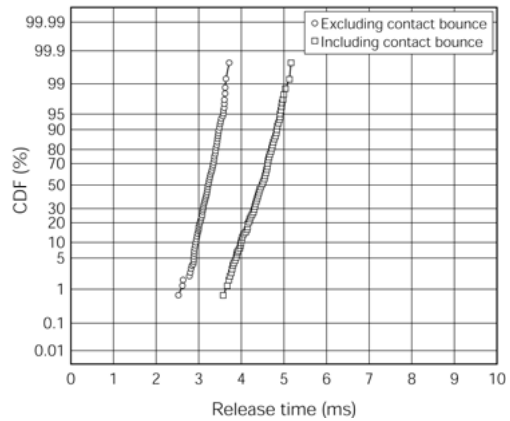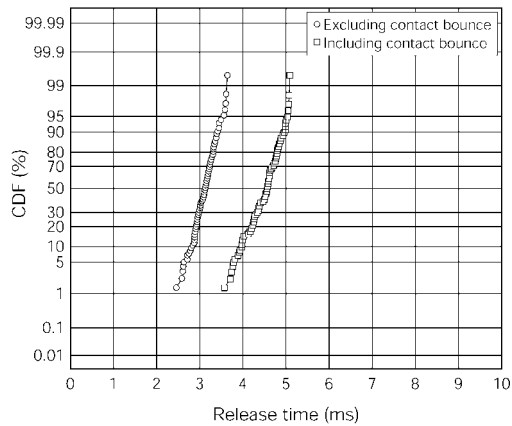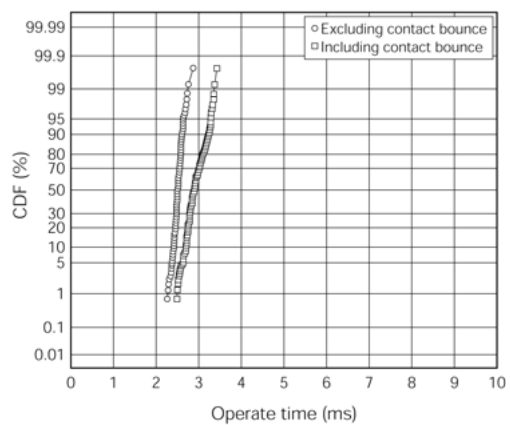
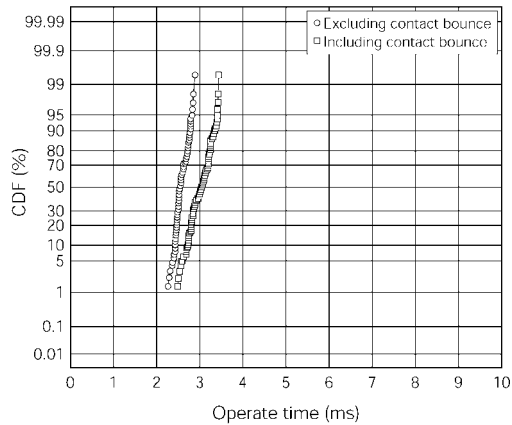
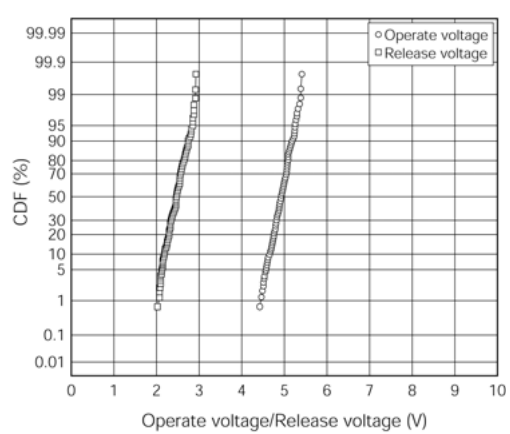


- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Samples : ET1F-B3M1S 100 pieces

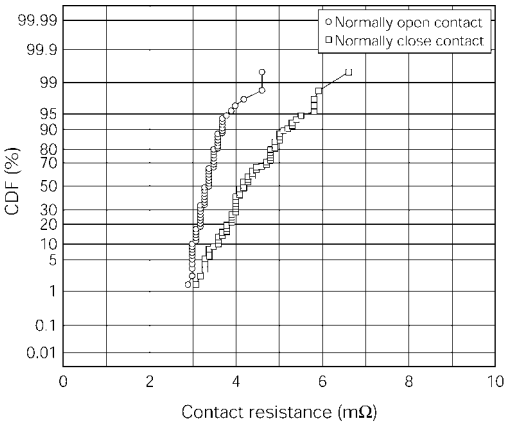

Samples : ET2F-B3M1S 100 pieces



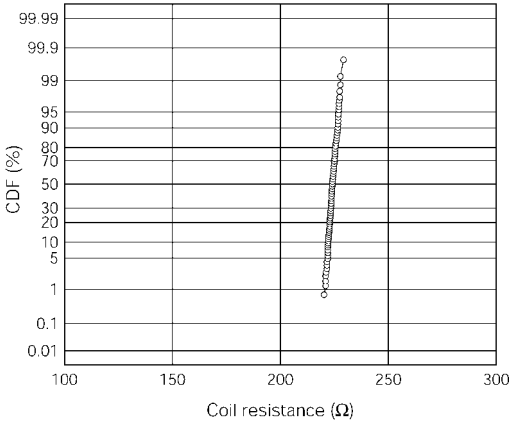
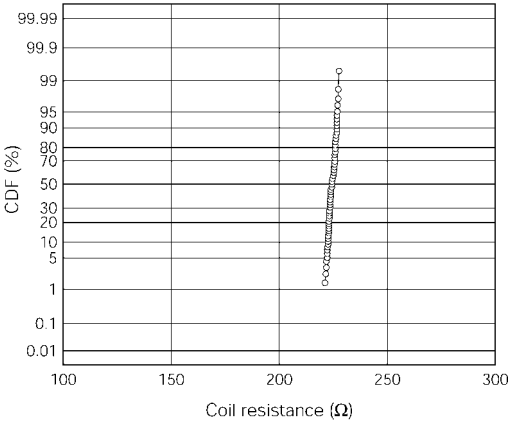
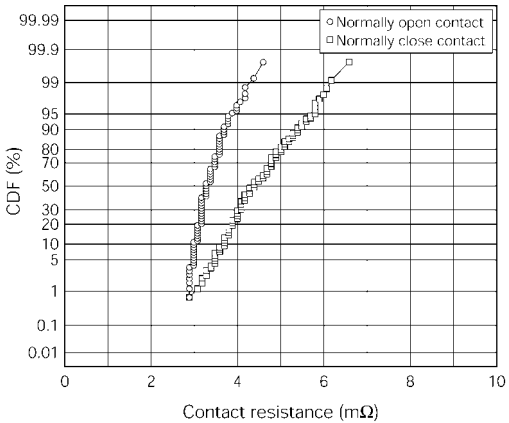


●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
●Please request for a specification sheet for detailed product data prior to the purchase.
●Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

DURABILITY LIFE

Mechanical life test






- Ambient temperature : 20°C
- Frequency : 15 Hz (50% duty)
- Contact load : No load
- Number of operations : 10×10^6
- Samples : ET2F-B3M1S 10 pieces

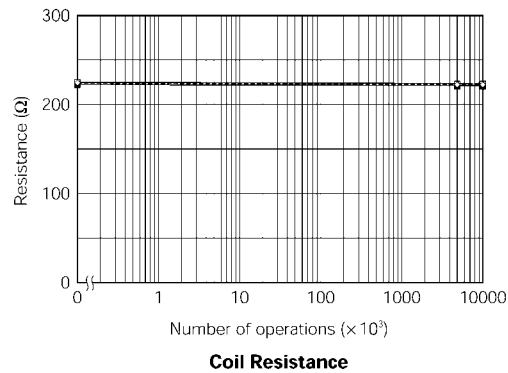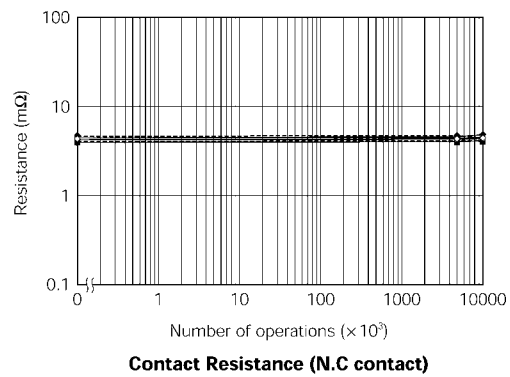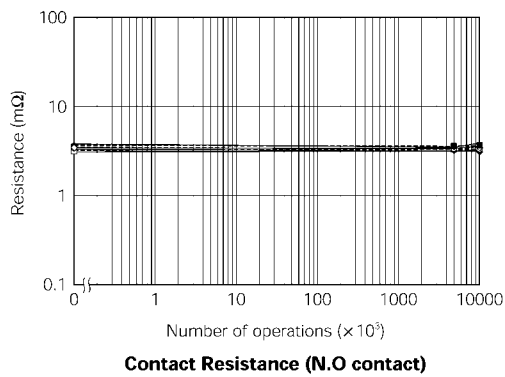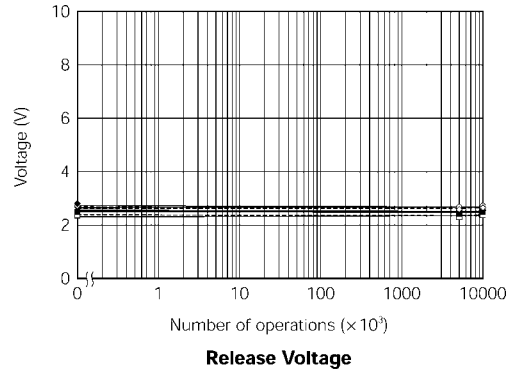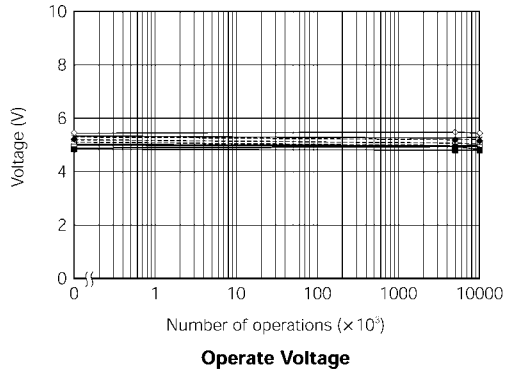

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Electrical life test (1)


- Ambient temperature : 125°C
- Frequency : 0.2s ON/9.8s OFF, 0.1 Hz
- Contact load : 14 Vdc, 20 A, Power window motor load, locked
- Number of operations : 100×10^3
- Samples : ET2F-B3M1S 10 pieces

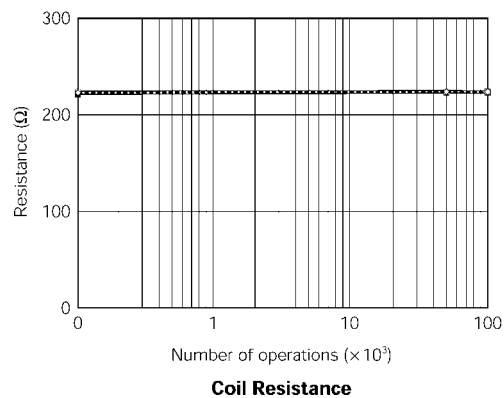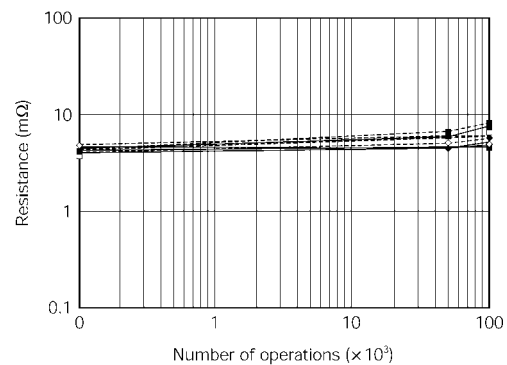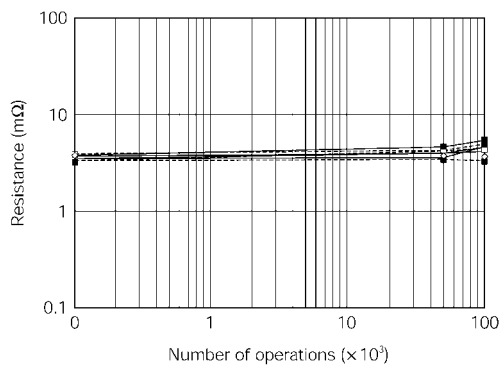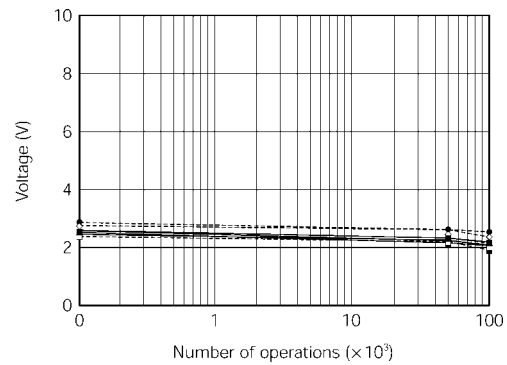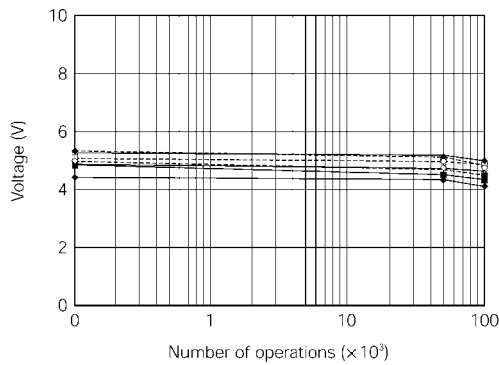


- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Electrical life test (2)


- Ambient temperature : 125°C
- Frequency : 0.2s ON/9.8s OFF, 0.1 Hz
- Contact load : 14 Vdc, 20 A, Power window motor load, unlocked
- Number of operations : 100×10^3
- Samples : ET2F-B3M1S 10 pieces

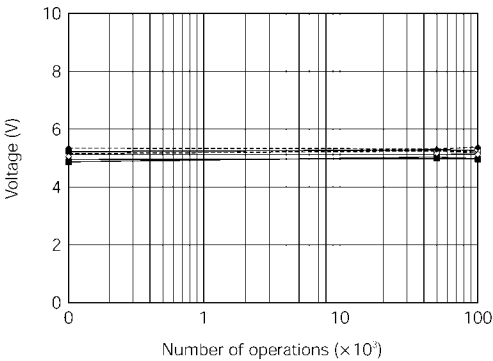


Operate Voltage

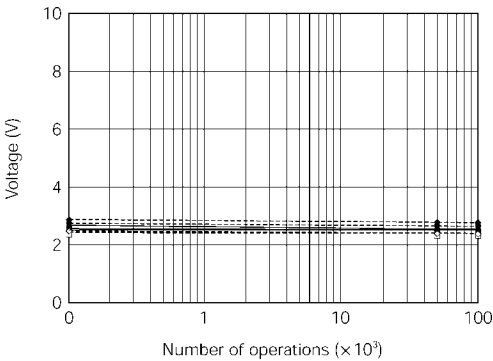


Release Voltage

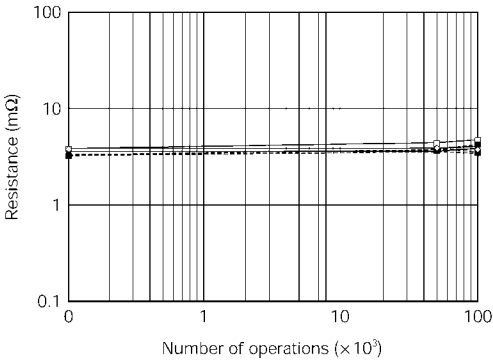

Contact Resistance (N.O contact)

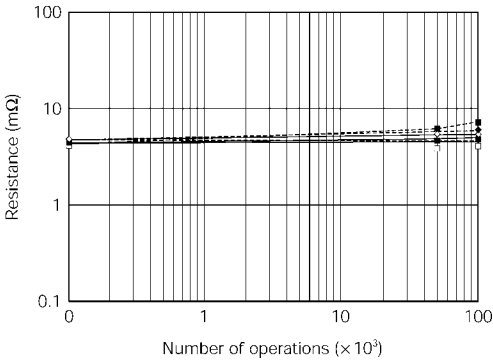

Contact Resistance (N.C contact)

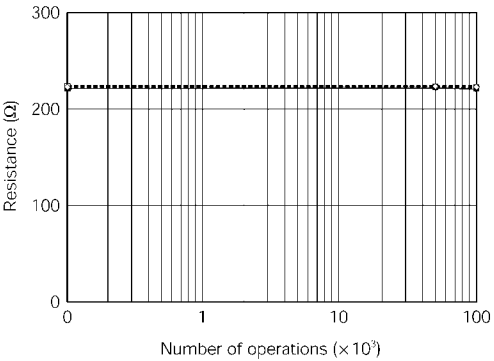

Coil Resistance



●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
●Please request for a specification sheet for detailed product data prior to the purchase.
●Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC/TOKIN Corporation. NEC/TOKIN Corporation assumes no responsibility for any errors which may appear in this document.

NEC/TOKIN Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC/TOKIN Corporation or others. While NEC/TOKIN Corporation has been making continuous effort to enhance the reliability of its electronic components, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC/TOKIN electronic component, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features. NEC/TOKIN devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC/TOKIN devices is "Standard" unless otherwise specified in NEC/TOKIN's Data Sheets or Data Books. If customers intend to use NEC/TOKIN devices for applications other than those specified for Standard quality grade, they should contact an NEC/TOKIN sales representative in advance.

(Note)

- (1) "NEC/TOKIN" as used in this statement means NEC/TOKIN Corporation and also includes its majorityowned subsidiaries.
- (2) "NEC/TOKIN electronic component products" means any electronic component product developed or manufactured by or for NEC/TOKIN (as defined above).

DE0202

Printed on recycled paper



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC Tokin for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.