


Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ Easily cleaned with freon, Alcohol, Isopropand and similar solvents

Mechanical Data

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012 ounces, 0.34 grams
- ◇ Mounting: Any

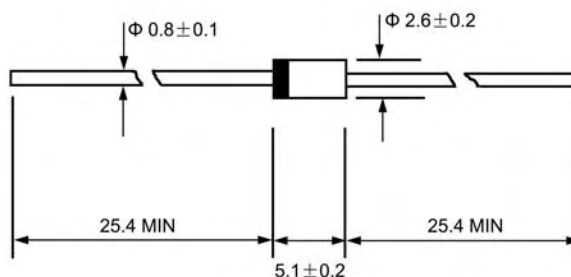

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		EU1Z	EU1	EU1A	EU1C	UNITS
Maximum peak repetitive reverse voltage	V _{RRM}	200	400	600	1000	V
Maximum RMS voltage	V _{RMS}	140	280	420	700	V
Maximum DC blocking voltage	V _{DC}	200	400	600	1000	V
Maximum average forward rectified current 9.5mm lead length @T _A =75°C	I _{F(AV)}	0.25			0.5	A
Peak forward surge current 10ms single half-sine-wave superimposed on rated load @T _J =125°C	I _{FSM}	15.0				A
Maximum instantaneous forward voltage @ I _F =I _{F(AV)}	V _F	2.5				V
Maximum reverse current @T _A =25°C at Rated DC blocking voltage @T _A =100°C	I _R	10.0 150.0				μ A
Maximum reverse recovery time (Note1)	t _{rr}	100				ns
Typical junction capacitance (Note2)	C _J	20		15		pF
Typical thermal resistance (Note3)	R _{θJL}	17				°C/W
Operating junction temperature range	T _J	- 55 ----- + 150				°C
Storage temperature range	T _{STG}	- 55 ----- + 150				°C



NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $t_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient.

Ratings AND Characteristic Curves

FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

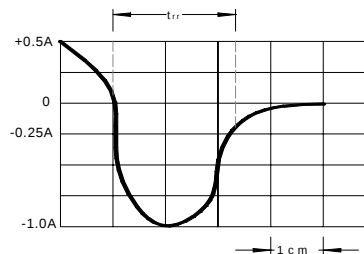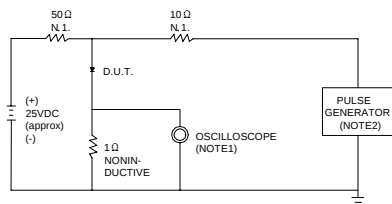


NOTES:1.RISE TIME = 7ns MAX.INPUT IMPEDANCE =1MΩ . 22pF.
2.RISE TIME =10ns MAX.SOURCE IMPEDANCE=50 Ω .

SET TIME BASE FOR 10/20 ns/cm

FIG.2 – TYPICAL FORWARD CHARACTERISTIC


INSTANTANEOUS FORWARD CURRENT
AMPERES

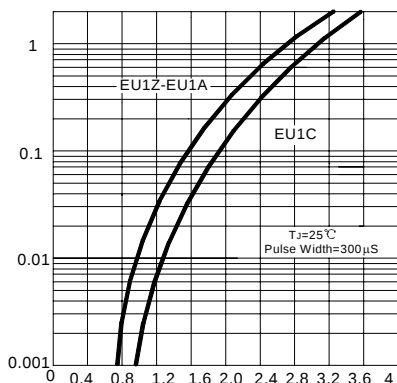

INSTANTANEOUS FORWARD VOLTAGE, VOLTS

FIG.3 – FORWARD DERATING CURVE


AVERAGE FORWARD RECTIFIED CURRENT
AMPERES

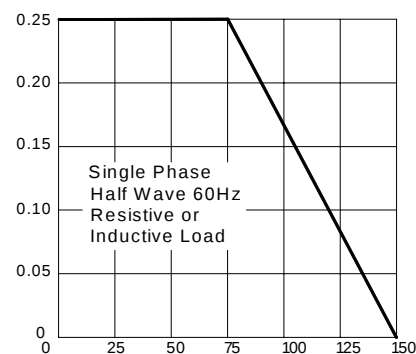

AMBIENT TEMPERATURE, °C


FIG.4 – PEAK FORWARD SURGE CURRENT

PEAK FORWARD SURGE CURRENT
AMPERES

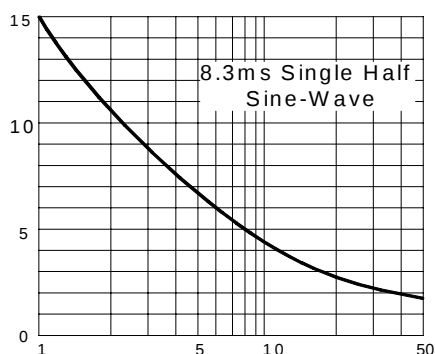

NUMBER OF CYCLES AT 60Hz

FIG.3--TYPICAL JUNCTION CAPACITANCE

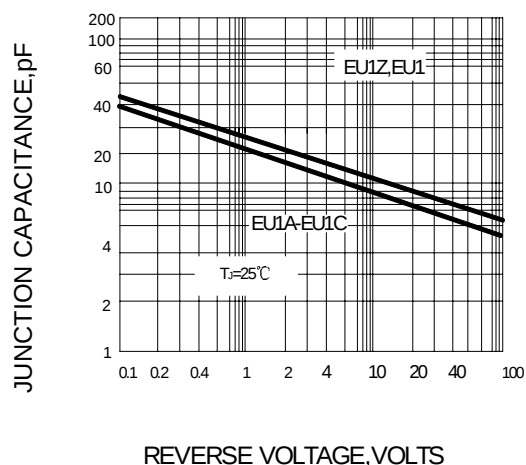

REVERSE VOLTAGE, VOLTS