

HIGH VOLTAGE DC RELAY

EVR-150



EVR150

▶ 코일정격 (Magnet coil ratings)

Nominal voltage(V)	Item	Nominal Coil current (mA)	Coil resistance (Ω)	Pick-up voltage (V)max.	Drop-out voltage (V)min.	Max. voltage (V)max.	Coil power(W) dissipation
DC	110	52	2,100	75%	10%	130%	5.6 ~ 5.9
	72	83	870				
	60	95	630				
	48	117	410				
	36	156	230				
	24	245	110				
	12	480	25				
	6	952	6.3				

Notes : 1. Nominal current and coil resistance are measured at +20°C.

2. Differences of coil resistance are $\pm 10\%$.


3. Performance characteristic coil temperature is measured at +20°C.

▶ 접점정격 (Contact ratings)

(450VDC기준)

Item	Type	1Pole Resistive load (L/R≤1ms)
		EVR 150
Max. Continuous current (wire size 50mm ²)		170A
Max. switching current		150A
Max. switching voltages		1200VDC 30A
Contact rating switching voltages		450VDC
Voltage drop across contacts per 100A		30mV max.
Min. permissible load		12V DC 0.5A
Description		S.P On/Off (a)
Contact Arrangement, auxiliary contacts		1Form A (SPST-NO.)
Aux. Contact Current, Max.		2A 30VDC / 3A 125VAC
Aux. Contact Current, Min.		100mA 8VDC

▶ 주문방법 (Ordering information)

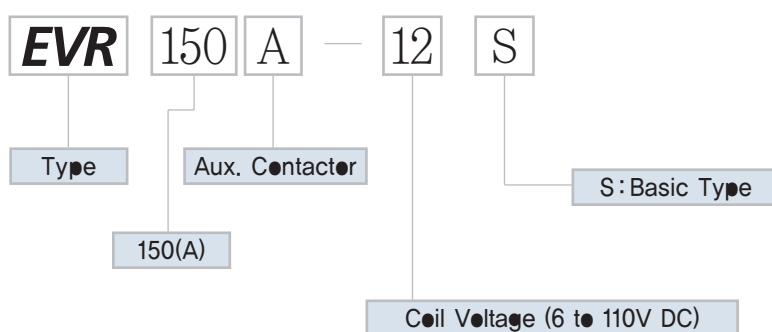

HIGH VOLTAGE DC RELAY

EVR-150





▶ 성능 (Characteristics)

Initial insulation resistance			Min. 100MΩ 500V DC		
Expected life	Mechanical (Min.)		10 ⁶		
	Electric (L/R≤1ms)	450V DC 150A	10 ⁴		
		250V DC 150A	10 ⁵		
Initial breakdown voltage	Between open contacts		3500V AC 1Min. 10mA		
	Between contacts & coil		3500V AC 1Min. 10mA		
Operate time (at 20°C)			Max. 20ms		
Release time (at 20°C)			Max. 5ms		
Shock resistance	Functional		Min 490 % {50G}		
	Destructive		Min 147 % {15G}		
Vibration resistance	Functional		100 % {10G} 10 to 500Hz		
	Destructive		100 % {10G} 10 to 500Hz		
Conditions for operation transport and storage	Ambient temperature		-40°C to +85°C		
	Humidity		5 to 85% R.H.		
Unit weight			300g		

▶ 특성곡선 (Reference data)

● 온도상승곡선

- 통전시간의 최대치 Max. Current capacity
Max. Continous thermal current rating (amperes)

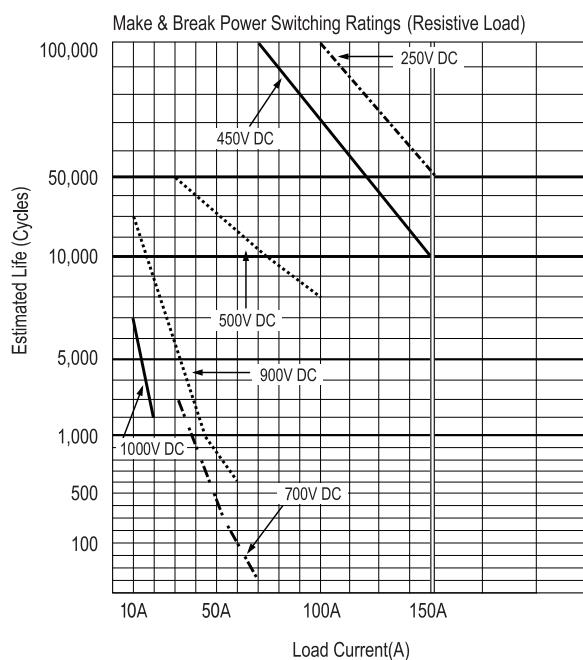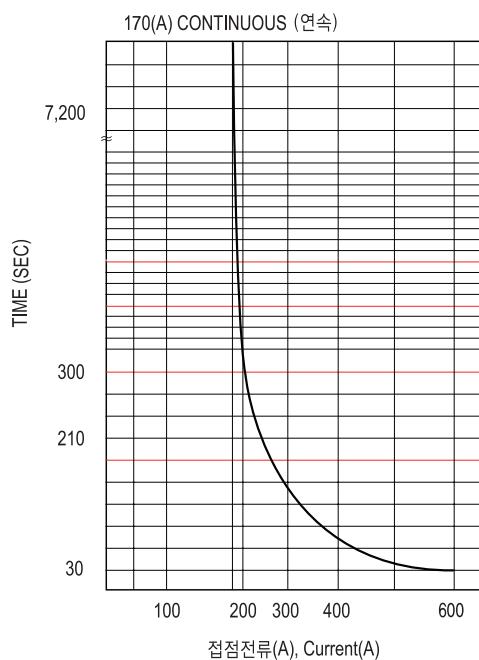


HIGH VOLTAGE DC RELAY

EVR-150



EVR150

외형차수도 (Dimension in mm)

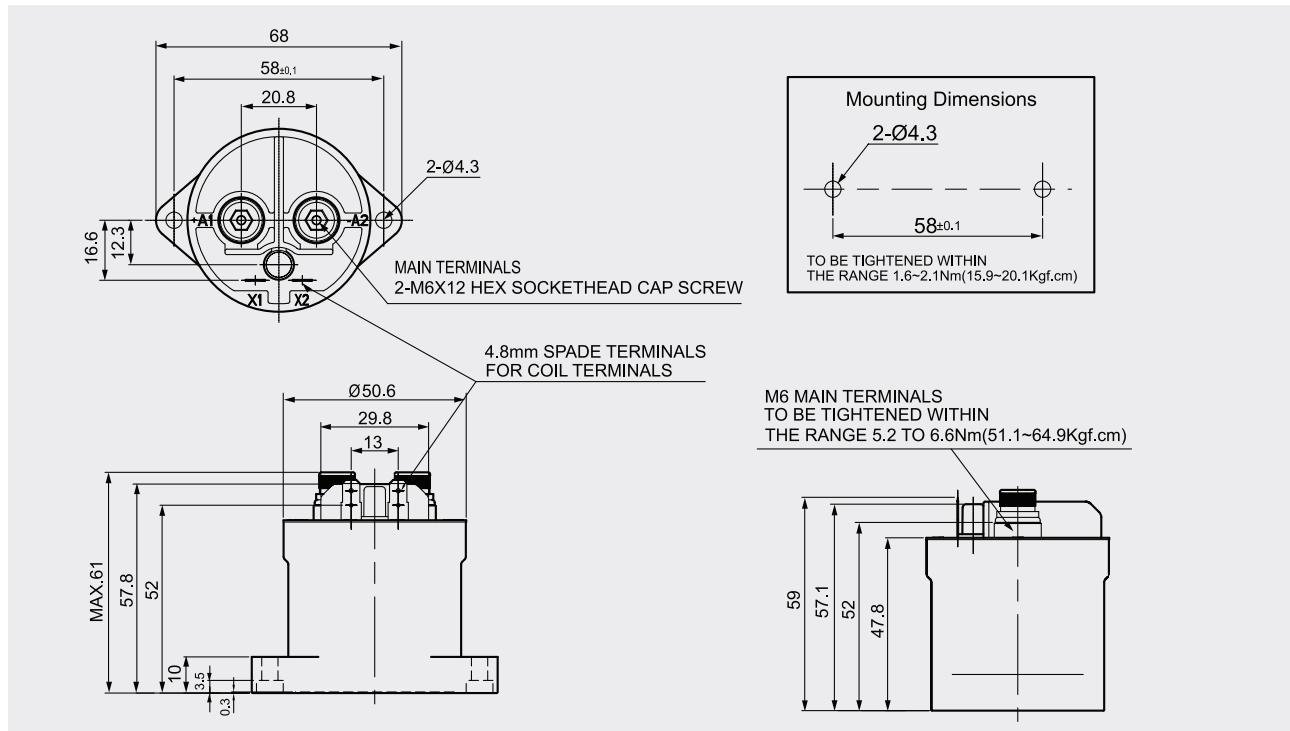

(Aux. Type)

