



# HIGH VOLTAGE DC RELAY

# EVR-400





EVR400

## ▶ 성능 (Characteristics)

Expected life	Mechanical (Min.)		10 <sup>6</sup>
	Electric (L/R≤1ms)	450V DC 400A	3×10 <sup>3</sup>
		250V DC 400A	10 <sup>5</sup>
Initial insulation resistance			Min. 100MΩ 500V DC
Initial breakdown voltage	Between open contacts		3500V AC 1Min. 5mA
	Between contacts & coil		3500V AC 1Min. 5mA
Operate time (at 20°C)			Max. 20ms
Release time (at 20°C)			Max. 10ms
Shock resistance	Functional		Min 490 % {50G}
	Destructive		Min 147 % {20G}
Vibration resistance	Functional		100 % {20G} 80 to 2000Hz
	Destructive		100 % {20G} 80 to 2000Hz
Conditions for operation transport and storage	Ambient temperature		-40°C to +85°C
	Humidity		5 to 85% R.H.
Unit weight			610g

## ▶ 특성곡선 (Reference data)

- 온도상승곡선
- 통전시간의 최대치 Max, Current capacity  
Max, Continous thermal current rating (amperes)

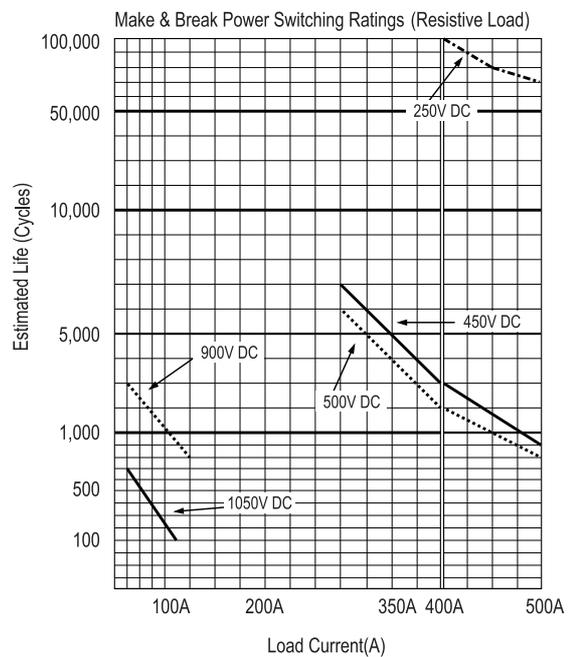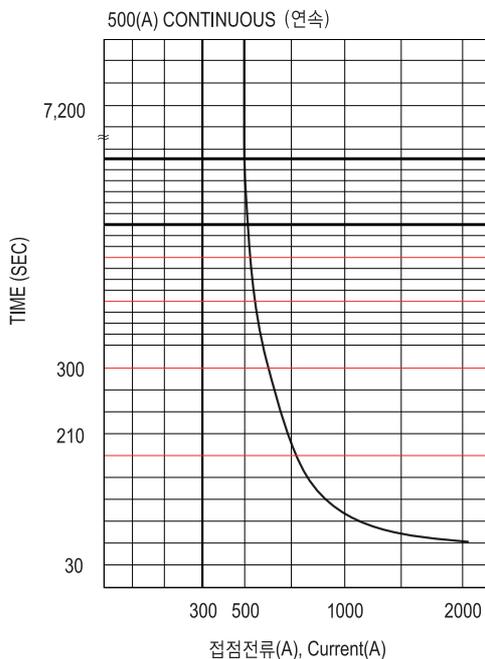


HIGH VOLTAGE DC RELAY

EVR-400



▶ 외형치수도 (Dimension in mm)

(Basic Type)

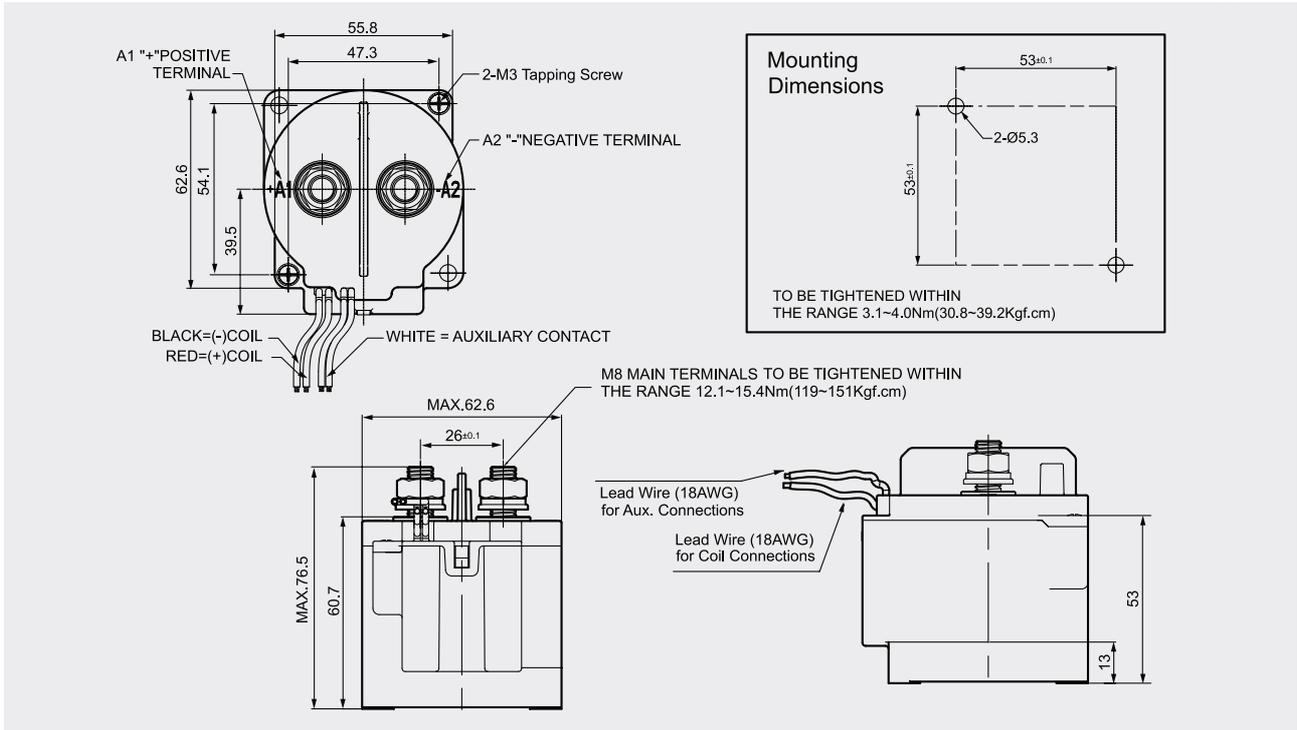

(Bolt on Type)

