



High-vacuum HALF-WAVE RECTIFIER  
 REDRESSEUR MONOPLAQUE à vide poussé  
 Hochvakuum EINWEGGLEICHRICHTER

Heating : indirect by A.C.  
 parallel supply  
 Chauffage: indirect par C.A.  
 alimentation-parallèle  
 Heizung : indirekt durch Wechsel-  
 strom; Parallelspeisung

$V_f = 6,3 \text{ V}$

$I_f = 0,42 \text{ A}$

Dimensions in mm  
 Dimensions en mm  
 Abmessungen in mm



Base, culot, Sockel: Miniature

Operating characteristics  
 Caractéristiques d'utilisation  
 Betriebsdaten

$V_i$ ( $V_{eff}$ )	$C_{filt}$ ( $\mu F$ )	$R_t$ ( $\Omega$ )
250	32	min. 100
	16	min. 50
	8	0
200	32	min. 70
	16	min. 30
	8	0


Limiting values  
 Caractéristiques limites  
 Grenzdaten

$V_i = \text{max. } 250 \text{ } V_{eff}$

$I_o = \text{max. } 75 \text{ mA}$

$C_{filt} = \text{max. } 32 \text{ } \mu F$

$V_{kf} = \text{max. } 300 \text{ V}$

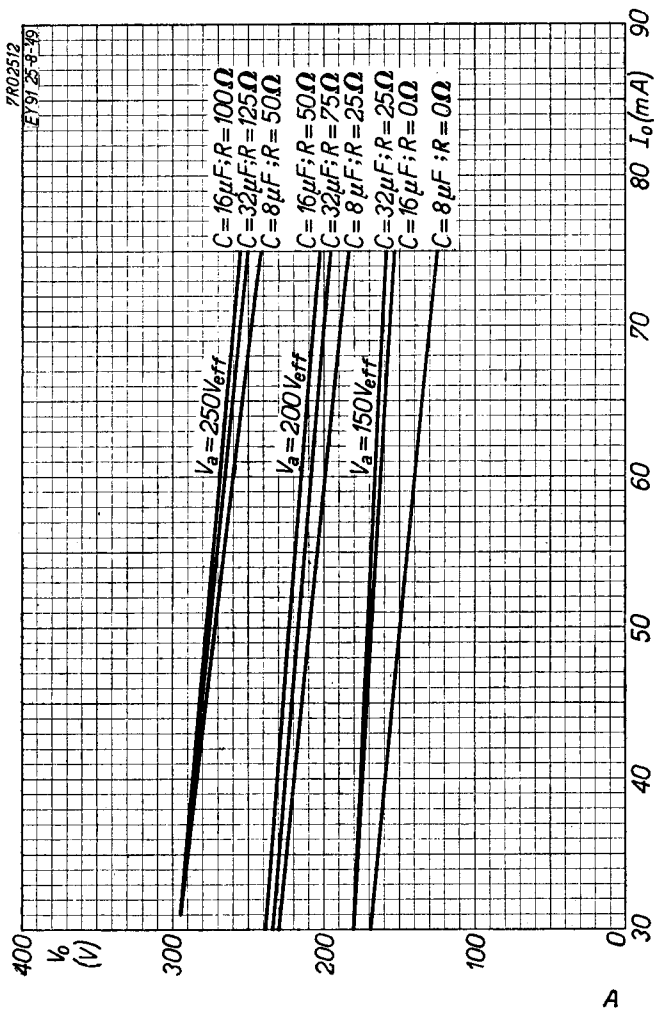

**PHILIPS**



*Electronic  
Tube*

**HANDBOOK**

<b>page</b>	<b>EY91 sheet</b>	<b>date</b>
1	1	1953.11.11
2	A	1953.11.11
3	FP	1999.07.10