


Compact MCP assembly optimized for helium leak detector and mass spectrometer using a wide dynamic range MCP

The F4655-01 is a very compact MCP assembly developed for helium leak detector as well as mass spectrometer. It uses a wide dynamic range MCP for extracting a high output current of 10 μ A* with high stability.

* : At an MCP resistance of 20M Ω

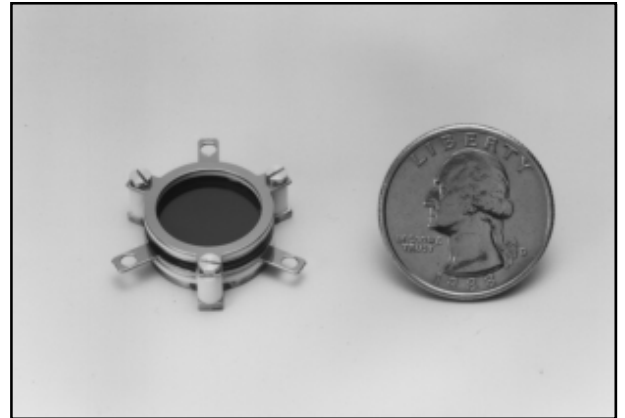

TMCPF0089

FEATURES

- Wide dynamic range
- Compact and lightweight
- Good cost performance

APPLICATIONS

- Helium leak detector
- Mass spectrometer

SPECIFICATIONS

GENERAL

Parameter	Value	Unit
Assembly Outer Diameter	30.0	mm
Effective Diameter	14.5	mm
Maximum Height	8.5	mm
MCP Channel Diameter	12	μ m
Number of MCP Stages	1 [Ⓐ]	-

[Ⓐ]Two-stage MCP type is also available on request.

MAXIMUM RATINGS (Absolute Values)


MCP Supply Voltage (In-Out)	1	kV
MCP-Out to Anode Voltage	0.5	kV
Electric Potential at Each Terminal	MCP-In: -1.5 MCP-Out: -0.5 Anode: GND	kV
Operating Vacuum Condition	6.7 $\times 10^{-4}$ (5 $\times 10^{-6}$)	Pa (Torr)
Baking Temperature	- [Ⓑ]	$^{\circ}$ C
Baking Time	- [Ⓑ]	h
Baking Vacuum Condition	- [Ⓑ]	Pa (Torr)

[Ⓑ]Baking cannot be performed.

CHARACTERISTICS (at 1.3 $\times 10^{-4}$ Pa (1 $\times 10^{-6}$ Torr), Ta=+25 $^{\circ}$ C)

Gain	1 $\times 10^4$	-
Plate Resistance	5 to 50	M Ω
Dark Current	0.5	pA/cm ²

Figure 1: MCP Output Linearity Characteristics

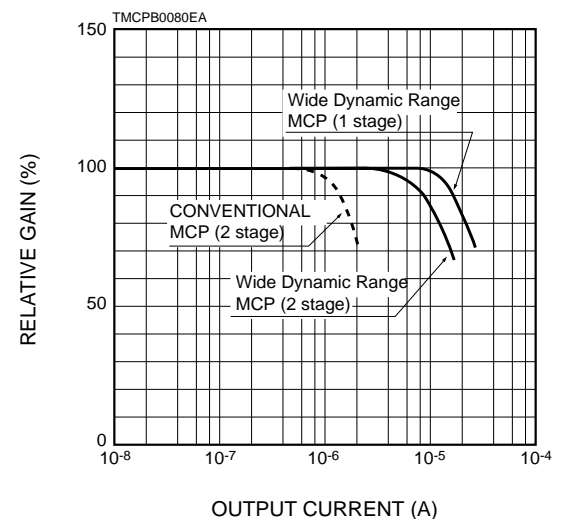


Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©1998 Hamamatsu Photonics K.K.

WIDE DYNAMIC RANGE MCP ASSEMBLY FOR HELIUM LEAK DETECTOR F4655-01

Figure 2: Dimensional Outlines (Unit: mm)

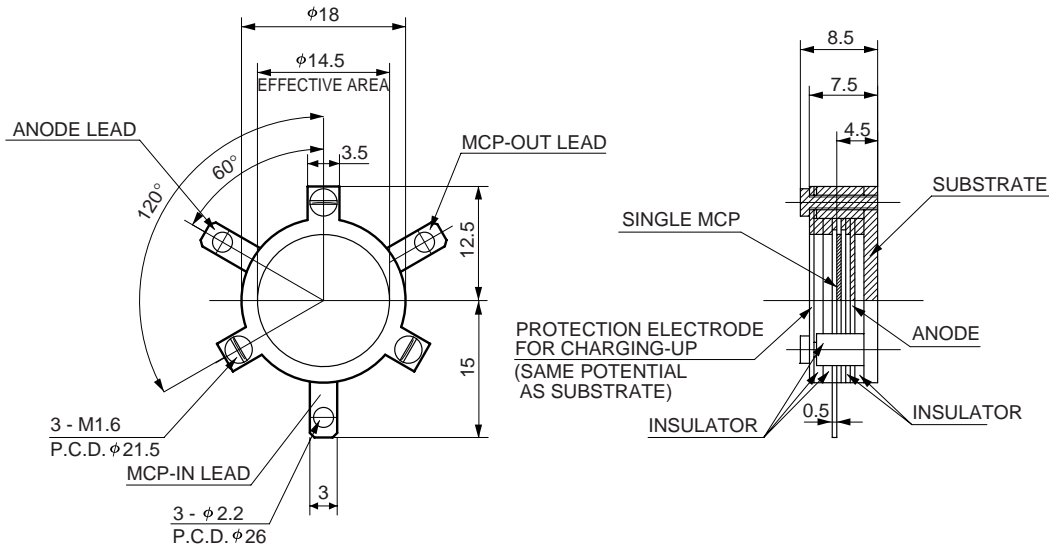

TMCPA0043EA

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Electron Tube Center

314-5, Shimokanzo, Toyooka-village, Iwata-gun, Shizuoka-ken, 438-0193 Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone:(1)908-231-0960, Fax:(1)908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone:(49)8152-375-0, Fax:(49)8152-2658

France: Hamamatsu Photonics France: S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone:(33)1 69 53 71 00, Fax:(33)1 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: Lough Point, 2 Gladbeck Way, Windmill Hill, Enfield, Middlesex EN2 7JA, United Kingdom, Telephone:(44)181-367-3560, Fax:(44)181-367-6384

North Europe: Hamamatsu Photonics Norden AB: Försågatan 7, S-164 40 Kista, Sweden, Telephone:(46)8-703-29-50, Fax:(46)8-750-58-95

Italy: Hamamatsu Photonics Italia S.R.L.: Via della Moia, 1/E 20020 Arese, (Milano), Italy, Telephone: (39)2 935 81 733 Fax: (39)2 935 81 741

TMCP1020E01
MAY 1998 SI
Printed in Japan (500)