


# SAW Filter

## F5QG881M5P2KG

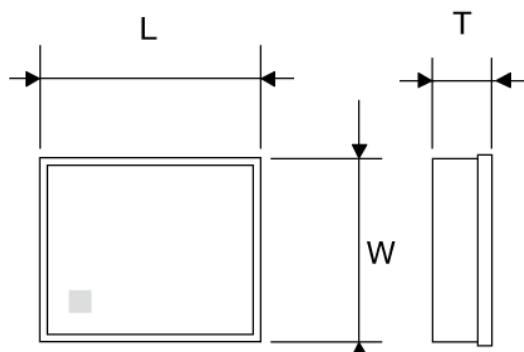

### ■ Features

- Item Summary  
W-CDMA / CDMA , Rx, 0403
- Lifecycle Stage  
Mass Production
- Standard packaging quantity (minimum)  
Taping Embossed 5000 , 15000pcs

### ■ Products characteristics table

Temperature Range	-30 to +85°C
Band(3GPP)	B5
Band(3GPP2)	BC0
Use	WCDMA / CDMA
Transmitting / Receiving	Rx Filter
Insertion Loss	1.5dB
Attenuation	56dB
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

### ■ External Dimensions

L	1.1mm +0.1:-0.1
W	0.9mm +0.1:-0.1
T	0.5mm max

2017.02.11

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.  
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.  
 Before making final selection, please check product specification.