

### Fixed Attenuator Chip

- ◆ DC to 12.4 GHz
- ◆ 6 dB
- ◆ 300mW

#### Features

- High attenuation accuracy
- Small VSWR
- Ceramic chip: 96% alumina
- Laser trimmed
- Low cost-high performance

#### Model No. Description

FACXXXX

XX- attenuation: \*\*dB.

XX- frequency range 06: DC to 6GHz  
 10: DC to 10GHz  
 12: DC to 12.4GHz  
 18: DC to 18GHz  
 26: DC to 26.5GHz.



#### Specifications

Frequency Range	DC to 12.4 GHz
Attenuation	6 dB
Attenuation Accuracy (Typical.)	±0.3 dB DC to 3 GHz + 0.5 dB 3 to 6 GHz + 0.75 dB 6 to 8.5 GHz + 1.0 dB 8.5 to 12.4 GHz
Nominal Impedance	50 Ohm
Rated Input Power	300mW
Operating Temperature	-55 °C to +150 °C


FREQ. RANGE (GHz)	VSWR(:1) Typical
DC to 3	1.05
3 to 6	1.15
6 to 8.5	1.25
8.5 to 12.4	1.40

#### Characteristic


For example the testing curves of FAC1206

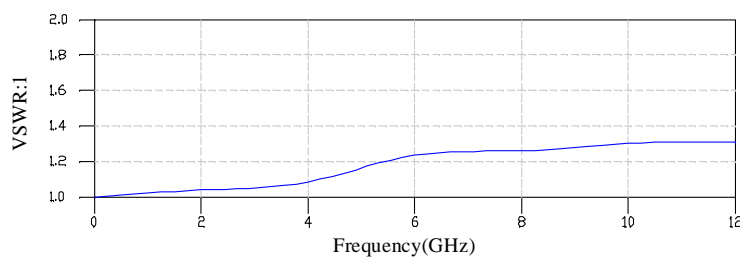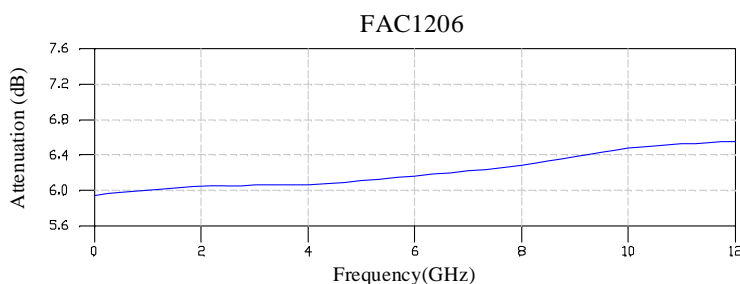

#### Package Outlines

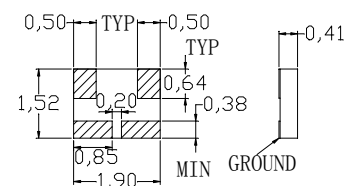

#### Recommended Layout

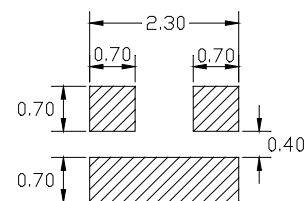

Note: all dimensions shown in mm

#### Yantel Corporation

Add: 2nd Floor, Building 2, Gaofa Technology Park, Longjing, Nanshan, Shenzhen, China. PC 518055

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)