


Audio & Visual Equipment

KYSAN SKU	Manufacturer Cross Reference	Voltage		No Load		At Maximum Efficiency					Pricing in US\$		
		Operating Range	Nom VDC	Speed RPM	Current A	Speed RPM	Current A	Torque		Output W			
Number	Number	Range	VDC	RPM	A	RPM	A	mN-m	g-cm	W	1+	10+	100+
1112089	RF-300CA-11440	0.7-5.0	2V	2200	0.018	1600	0.055	0.27	2.8	0.06	3.17	2.85	2.57
1112014	RF-300CA-11400	1.0-6.1	3V	3000	0.018	2400	0.065	0.42	4.3	0.11	3.17	2.85	2.57
1112013	RF-300CH-11400	1.0-6.3	3V	3000	0.018	2400	0.65	0.42	4.3	0.11	3.17	2.85	2.57
1111107	RF-300CH-11440	0.7-5.0	2V	2200	0.015	1600	0.055	2.8	2.8	0.06	3.17	2.85	2.57
1111136	RF-300PA-11440	0.7-5.0	2	2200	0.018	1660	0.055	0.28	2.9	0.049	3.17	2.85	2.57
1112319	RF-300PA-11400	1.2-6.0	3	3700	0.018	2970	0.073	0.37	3.8	0.12	3.17	2.85	2.57
1111142	RF-300PA-12350	1.5-6.0	3	3500	0.022	2830	0.093	0.48	4.9	0.14	3.17	2.85	2.57
1111140	RF-300EA-1D390	2.8 - 7.0	3.9	4400	0.021	3520	0.084	0.47	4.8	0.17	3.17	2.85	2.57
1111141	RF-300FA-11420	0.7 - 5.0	3	2900	0.017	2320	0.068	0.42	4.3	0.1	3.17	2.85	2.57
1111142	RF-300FA-12350	1.5 - 6.0	3	3500	0.022	2830	0.093	0.48	4.9	0.14	3.17	2.85	2.57
1112001	RF-310TA-11400	1.0-6	2.5	2800	0.17	2190	0.061	0.32	3.3	0.73	1.80	1.62	1.46
	RF-310TA-11400-A	1.2-6	6	7680	0.04	5800	0.14	0.79	8.1	0.48	2.00	1.80	1.62
	RF-500TB- 14415A	1.0-9.0	3	1800	0.022	1400	0.085	0.78	8	0.11	2.00	1.80	1.62
16071	RF-500TB- 14415B	1.5-9.0	5	3100	0.026	2540	0.12	1.23	12.6	0.33	2.00	1.80	1.62
	RF-500TB- 14415C	1.0 - 9.0	6	3700	0.028	3000	0.13	1.37	14	0.43	2.00	1.80	1.62
1112003	RF-500TB-12560-6V	6.0-12	6	2700	0.02	2180	0.084	1.13	11.6	0.26	2.00	1.80	1.62
1111146	RF-500TB-12560-12V	6.0-12	12	5600	0.03	4653	0.11	1.76	18	0.88	2.00	1.80	1.62
	RF-500TB-12560-19V	12.0-24	19	5150	0.0157	4300	0.082	2.06	25		2.00	1.80	1.62
	RF-500TB-18290	1.5-4.0	3	2660	0.03	2175	0.16	1.18	12	0.27	2.00	1.80	1.62
1112092	RF-500TB-18280	3.0-6.0	6	5150	0.05	4300	0.26	2.06	21	0.27	2.00	1.80	1.62
1112076	FF-N20PA-10190	2.0-5.0	3	12100	0.045	9390	0.16	0.21	2.1	0.2	1.15	1.04	0.93
	FF-N20PN-8260	1.5 - 6.0	5	14600	0.043	11150	0.14	0.26	2.6	0.3	1.15	1.04	0.93
1111126	RF-400CA-10350	1.0-6.0	2	3300	0.022	2460	0.065	0.21	2.1	0.054	1.63	1.47	1.32
1111122	RF-400CA-12265	1.0-6.0	2	4000	0.03	3070	0.099	0.25	2.6	0.08	1.63	1.47	1.32
15963	RF-356CA-10250	1.0-6.0	2	3200	0.02	2460	0.066	0.25	2.6	0.064	2.20	1.98	1.78
1112012	RF-370CA-15370	3-12.0	12	5600	0.026	4840	0.17	2.48	25.3	1.25	2.20	1.98	1.78
1111503	RF-370CA-12560	4-12.0	8	2400	0.015	1970	0.069	1.57	16	0.32	2.20	1.98	1.78
1111054	RF-370CA-15390	3-12.0	12	5500	0.026	4840	0.17	2.48	25.3	1.25	2.20	1.98	1.78
1111064	RF-370CA-10620	3-12.0	12	3000	0.026	3529	0.17	2.48	25.3	1.25	2.20	1.98	1.78

RF-300FA	RF-300CH	RF-500	RF-310	FF-N20PA
				
24.4 Diameter x 12.3 Length x 6.0 Shaft (mm)	24.4 Diameter x 12.3 Length x 7.05 Shaft (mm)	32.0 Diameter x 22.8 Length x 10.7 Shaft (mm)	24.4 Diameter x 20.1 Length x 18.9 Shaft (mm)	12.0 Diameter x 15.0 Length x 7.1 Shaft (mm)
CD Player	CD/DVD-ROM Drive	CD/DVD-ROM Drive	CD Player	CD Player

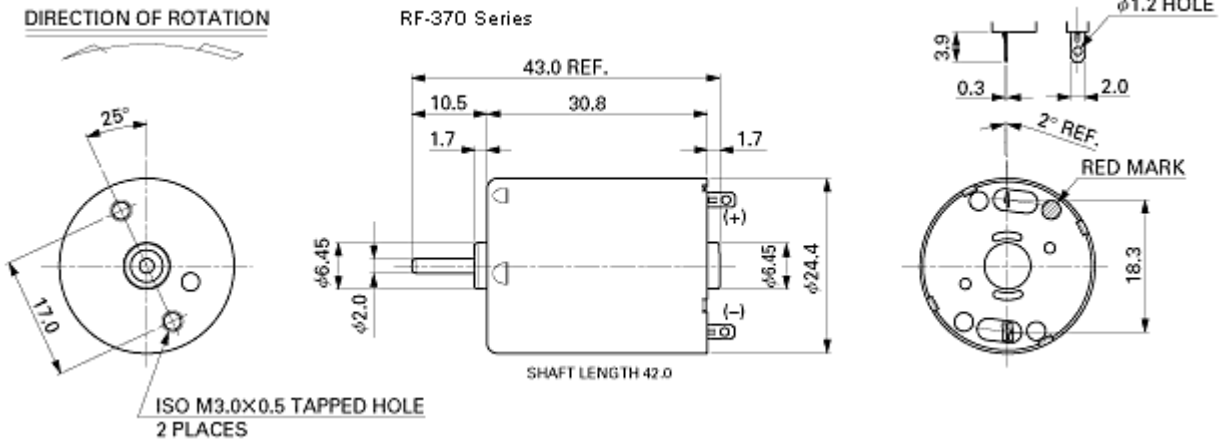

RF-400	RF-356	FF-N20	RF-370	FF-180
24.4 Diameter x 9.0 Length x 7.5 Shaft (mm)	24.4 Diameter x 7.8 Length x 6.0 Shaft (mm)	12.0 Diameter x 15.0 Length x 7.1 Shaft (mm)	24.4 Diameter x 30.8 Length x 10.5 Shaft (mm)	20.4 Diameter x 32.1 Length x 8.55 Shaft (mm)
CD Player	Digital Camera	Drill Screwdriver Tools	Styling Brush	Electric Shaver

