

V_{RSM} = 100 V, I_{F(AV)} = 15 A
Trench Schottky Diode
FMET-21510

Features

FMET-21510 is 100 V / 15 A Schottky Diode of the Trench structure and has the improved characteristics of V_F and I_R. These characteristics realize the improving of power supply efficiency, and the high frequency system.

- V_{RM}----- 100 V
- I_{F(AV)}----- 15A
- V_F (125 °C, I_F= 3.5 A)----- 0.57 V typ.


Applications

The high speed switching applications as follows:


- DC-DC Converter
- Adapter

Package

TO220F-3L



(1) Anode
 (2) Cathode
 (3) Anode



Not to scale

Absolute Maximum Ratings

- Unless otherwise specified, T_j is 25 °C

Parameter	Symbol	Rating	Unit	Notes
Peak Repetitive Reverse Voltage	V _{RSM}	100	V	
Repetitive Reverse Voltage	V _{RM}	100	V	
Average Forward Current	I _{F(AV)}	15	A	
Surge Forward Current	I _{FSM}	100	A	10 ms Half sinewave, one shot
Junction Temperature	T _j	-40 to 150	°C	
Storage Temperature	T _{stg}	-40 to 150	°C	

Electrical Characteristics

- Unless otherwise specified, T_j is 25 °C

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Forward Voltage Drop	V _F	I _F = 3.5 A	-	0.65	-	V
		I _F = 7.5 A	-	0.81	0.85	V
Forward Voltage Drop Under High Temperature	H·V _F	T _j = 125 °C, I _F = 3.5 A	-	0.57	-	V
		T _j = 125 °C, I _F = 7.5 A	-	0.67	-	V
Reverse Leakage Current	I _R	V _R = V _{RM}	-	0.3	50	μA
Reverse Leakage Current Under High Temperature	H·I _R	V _R = V _{RM} , T _j = 150 °C	-	3.0	25	mA
Thermal Resistance*	R _{th(j-c)}		-	-	4.0	°C/W

* R_{th(j-c)} is thermal resistance between junction and case. Case temperature (T_C) is measured at the under of the screw hole of case.

Performance Curves

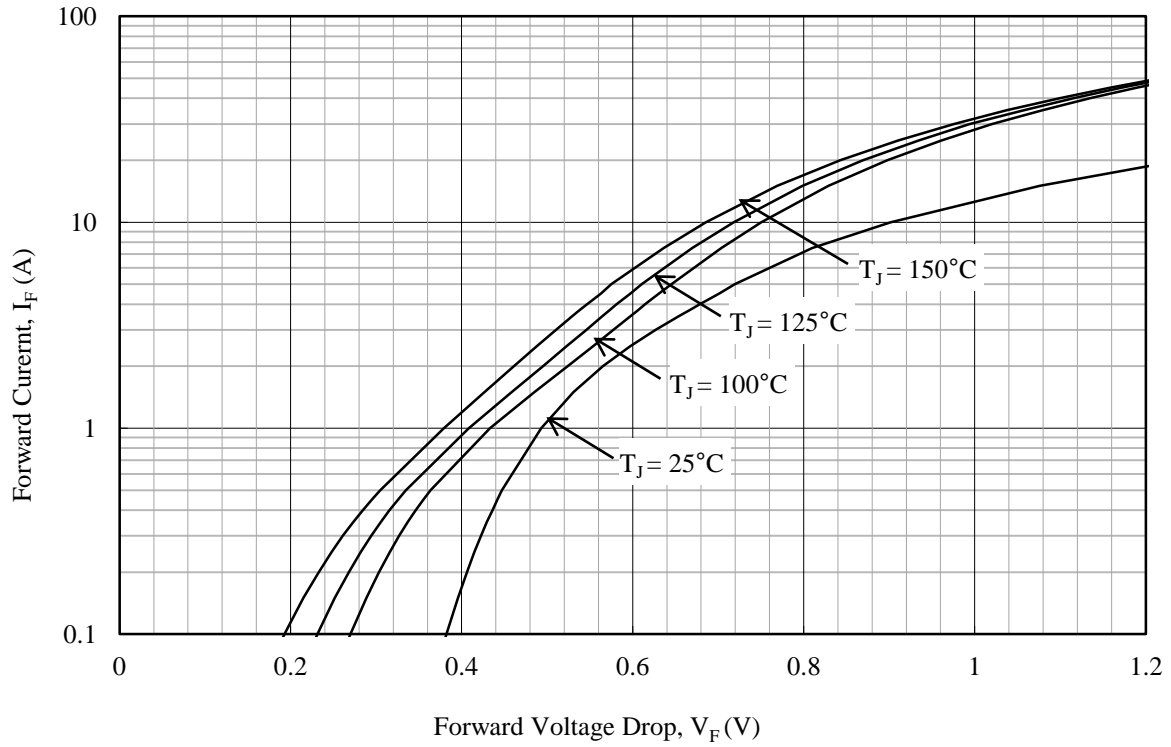


Figure 1 Typical Forward Characteristics

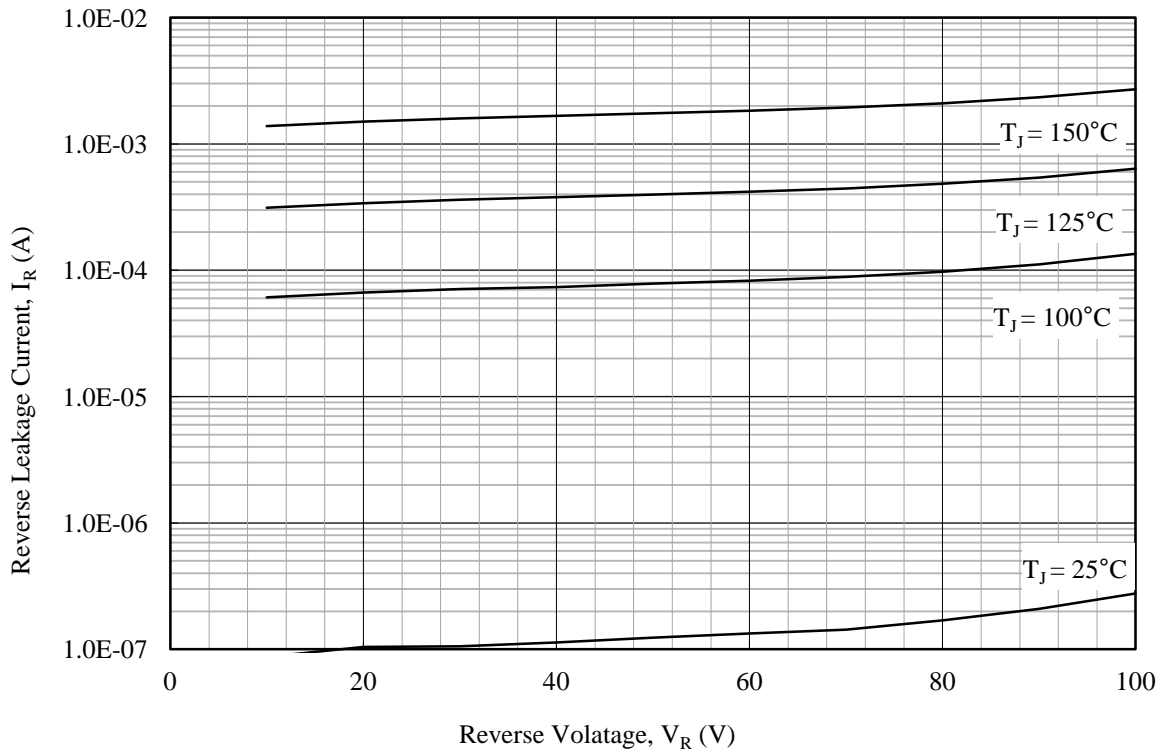


Figure 2 Typical Reverse Leakage Current Characteristics

Power Dissipation Curves

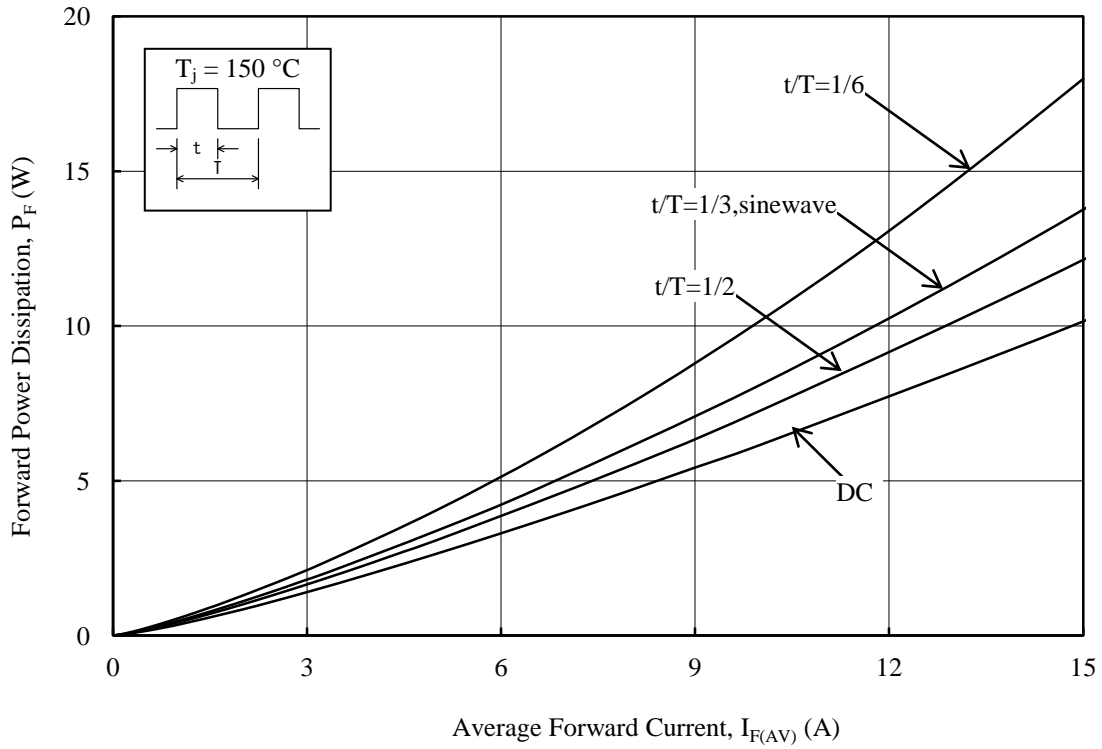


Figure 3 Forward Power Dissipation, P_F vs. Average Forward Current, $I_{F(AV)}$

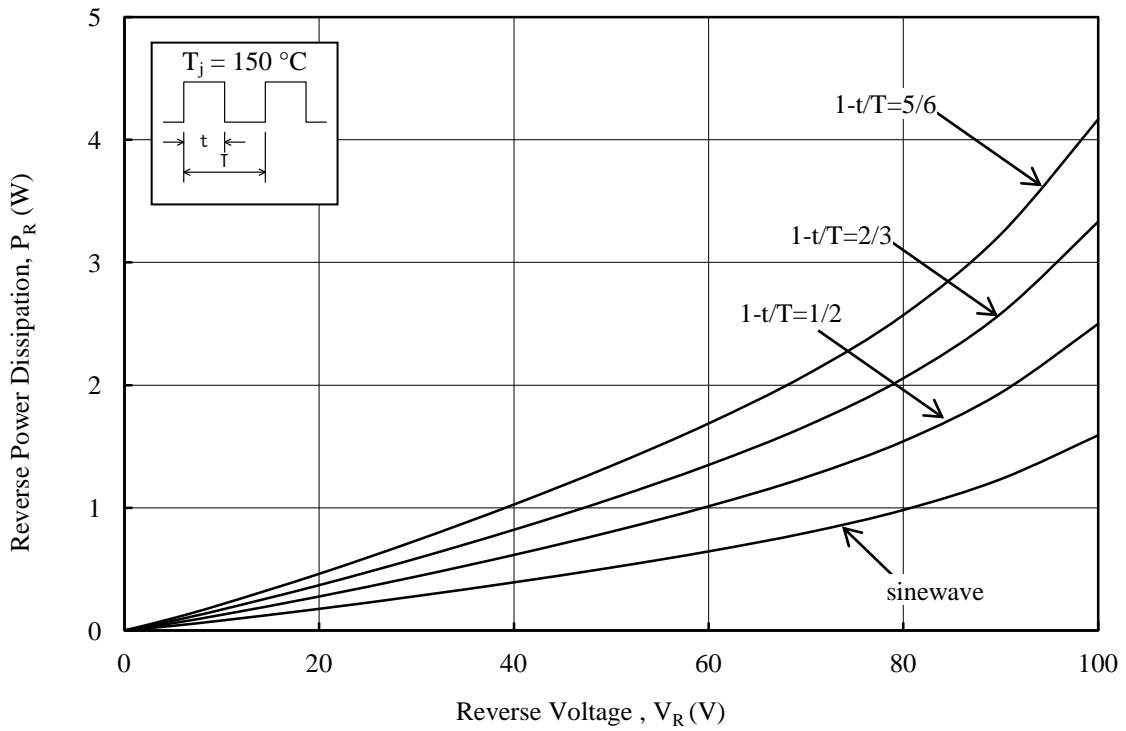


Figure 4 Reverse Power Dissipation, P_R vs. Reverse Voltage, V_R

Derating Curves

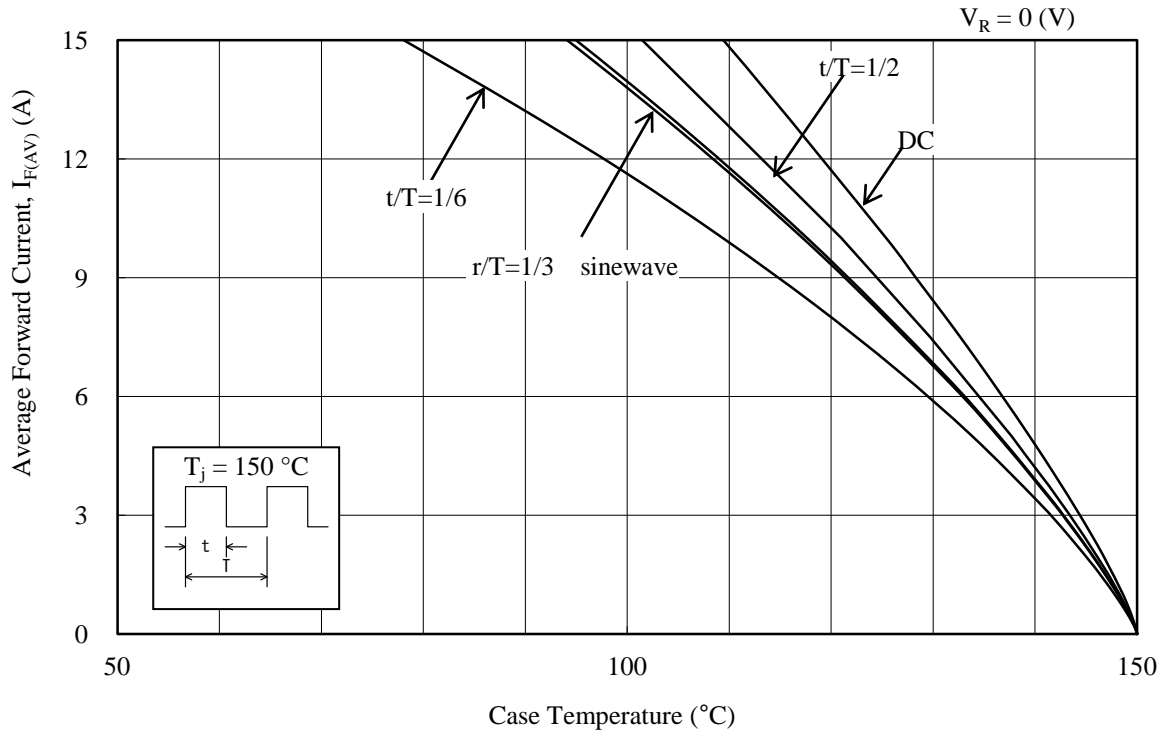


Figure 5 Average Rectified Forward Current, $I_{F(AV)}$ vs. Case Temperature


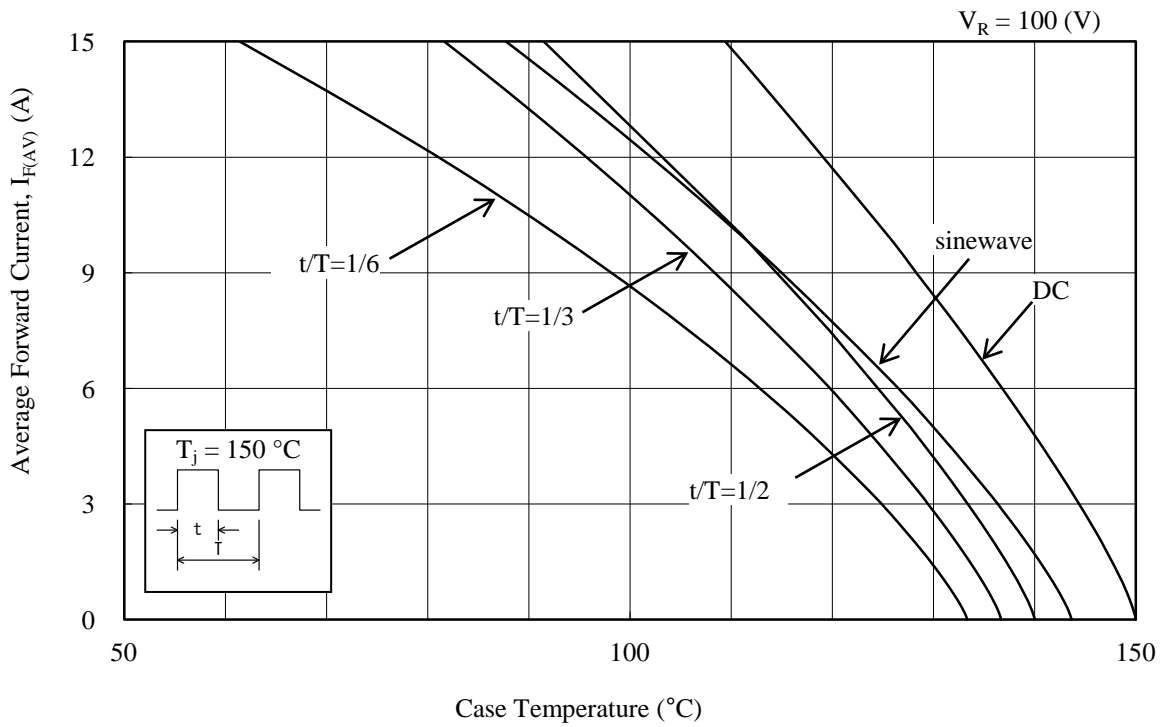


Figure 6 Average Rectified Forward Current, $I_{F(AV)}$ vs. Case Temperature

FMET-21510

Package Outline


TO220F-3L

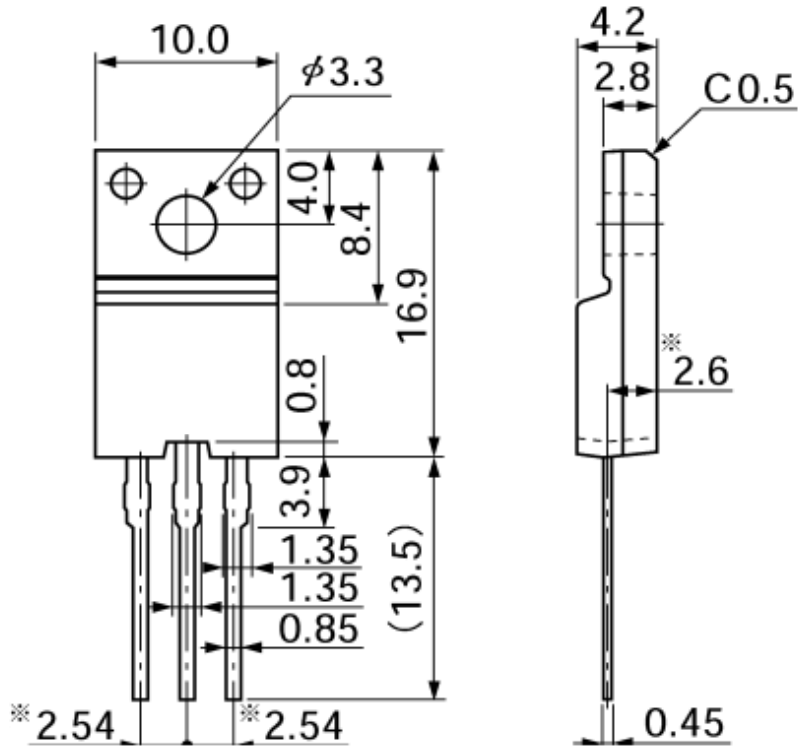

NOTES:

- 1) Dimension is in millimeters.
- 2) Pin treatment Pb-free. Device composition compliant with the RoHS directive.

Marking Diagram

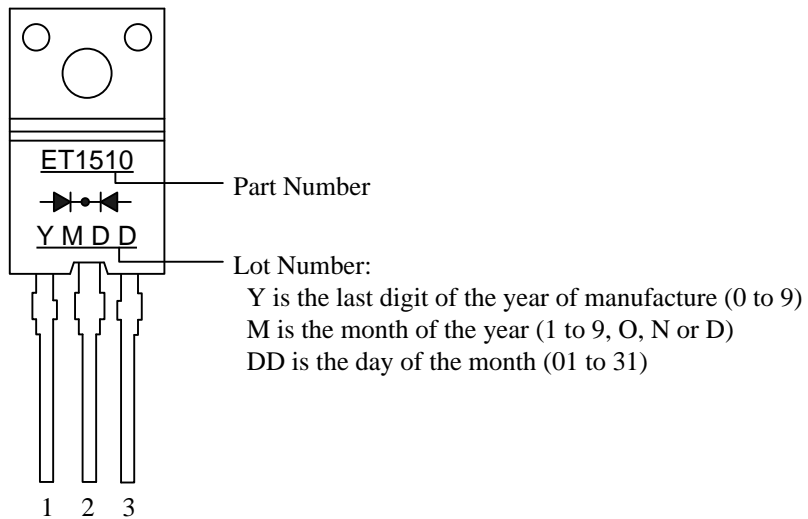

IMPORTANT NOTES

- All data, illustrations, graphs, tables and any other information included in this document as to Sanken's products listed herein (the "Sanken Products") are current as of the date this document is issued. All contents in this document are subject to any change without notice due to improvement of the Sanken Products, etc. Please make sure to confirm with a Sanken sales representative that the contents set forth in this document reflect the latest revisions before use.
- The Sanken Products are intended for use as components of general purpose electronic equipment or apparatus (such as home appliances, office equipment, telecommunication equipment, measuring equipment, etc.). Prior to use of the Sanken Products, please put your signature, or affix your name and seal, on the specification documents of the Sanken Products and return them to Sanken. When considering use of the Sanken Products for any applications that require higher reliability (such as transportation equipment and its control systems, traffic signal control systems or equipment, disaster/crime alarm systems, various safety devices, etc.), you must contact a Sanken sales representative to discuss the suitability of such use and put your signature, or affix your name and seal, on the specification documents of the Sanken Products and return them to Sanken, prior to the use of the Sanken Products. The Sanken Products are not intended for use in any applications that require extremely high reliability such as: aerospace equipment; nuclear power control systems; and medical equipment or systems, whose failure or malfunction may result in death or serious injury to people, i.e., medical devices in Class III or a higher class as defined by relevant laws of Japan (collectively, the "Specific Applications"). Sanken assumes no liability or responsibility whatsoever for any and all damages and losses that may be suffered by you, users or any third party, resulting from the use of the Sanken Products in the Specific Applications or in manner not in compliance with the instructions set forth herein.
- In the event of using the Sanken Products by either (i) combining other products or materials therewith or (ii) physically, chemically or otherwise processing or treating the same, you must duly consider all possible risks that may result from all such uses in advance and proceed therewith at your own responsibility.
- Although Sanken is making efforts to enhance the quality and reliability of its products, it is impossible to completely avoid the occurrence of any failure or defect in semiconductor products at a certain rate. You must take, at your own responsibility, preventative measures including using a sufficient safety design and confirming safety of any equipment or systems in/for which the Sanken Products are used, upon due consideration of a failure occurrence rate or derating, etc., in order not to cause any human injury or death, fire accident or social harm which may result from any failure or malfunction of the Sanken Products. Please refer to the relevant specification documents and Sanken's official website in relation to derating.
- No anti-radioactive ray design has been adopted for the Sanken Products.
- No contents in this document can be transcribed or copied without Sanken's prior written consent.
- The circuit constant, operation examples, circuit examples, pattern layout examples, design examples, recommended examples, all information and evaluation results based thereon, etc., described in this document are presented for the sole purpose of reference of use of the Sanken Products and Sanken assumes no responsibility whatsoever for any and all damages and losses that may be suffered by you, users or any third party, or any possible infringement of any and all property rights including intellectual property rights and any other rights of you, users or any third party, resulting from the foregoing.
- All technical information described in this document (the "Technical Information") is presented for the sole purpose of reference of use of the Sanken Products and no license, express, implied or otherwise, is granted hereby under any intellectual property rights or any other rights of Sanken.
- Unless otherwise agreed in writing between Sanken and you, Sanken makes no warranty of any kind, whether express or implied, including, without limitation, any warranty (i) as to the quality or performance of the Sanken Products (such as implied warranty of merchantability, or implied warranty of fitness for a particular purpose or special environment), (ii) that any Sanken Product is delivered free of claims of third parties by way of infringement or the like, (iii) that may arise from course of performance, course of dealing or usage of trade, and (iv) as to any information contained in this document (including its accuracy, usefulness, or reliability).
- In the event of using the Sanken Products, you must use the same after carefully examining all applicable environmental laws and regulations that regulate the inclusion or use of any particular controlled substances, including, but not limited to, the EU RoHS Directive, so as to be in strict compliance with such applicable laws and regulations.
- You must not use the Sanken Products or the Technical Information for the purpose of any military applications or use, including but not limited to the development of weapons of mass destruction. In the event of exporting the Sanken Products or the Technical Information, or providing them for non-residents, you must comply with all applicable export control laws and regulations in each country including the U.S. Export Administration Regulations (EAR) and the Foreign Exchange and Foreign Trade Act of Japan, and follow the procedures required by such applicable laws and regulations.
- Sanken assumes no responsibility for any troubles, which may occur during the transportation of the Sanken Products including the falling thereof, out of Sanken's distribution network.
- Although Sanken has prepared this document with its due care to pursue the accuracy thereof, Sanken does not warrant that it is error free and Sanken assumes no liability whatsoever for any and all damages and losses which may be suffered by you resulting from any possible errors or omissions in connection with the contents included herein.
- Please refer to the relevant specification documents in relation to particular precautions when using the Sanken Products, and refer to our official website in relation to general instructions and directions for using the Sanken Products.

DSGN-CEZ-16001