




FR151S THRU FR157S

HIGH EFFICIENCY RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current - 1.5 Ampere

DO-41

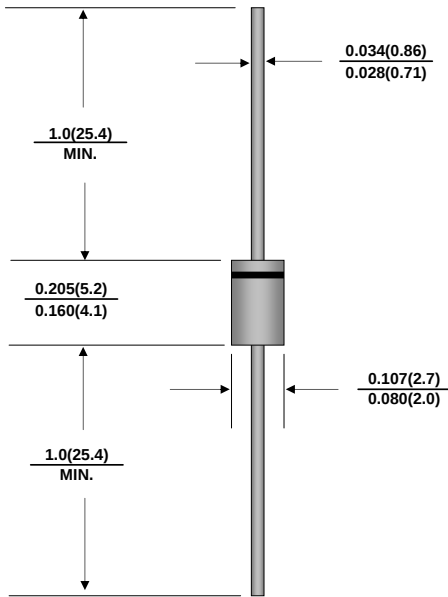

Dimensions in inches and (millimeters)

FEATURES

- ◆ Low power loss, high efficiency
- ◆ Low leakage
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High speed switching
- ◆ High current surge capability
- ◆ High reliability
- ◆ Pb free product : 99% Sn above can meet RoHS environment substance directive request

MECHANICAL DATA

Case: JEDEC DO-41, Molded plastic

Terminals: Solderable per MIL-STD-750 Method 2026

Epoxy: UL94V-0 rate flame retardant

Approx. Weight: 0.014 ounce, 0.40 gram

Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOLS	FR 151S	FR 152S	FR 153S	FR 154S	FR 155S	FR 156S	FR 157S	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Average Rectified current at T _A =75℃	I _(AV)	1.5							Amp
Non-repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50							Amps
Maximum Forward Voltage at I _F =1.5A	V _F	1.3							Volts
Maximum DC reverse current at rated DC blocking voltage at T _A =25℃	I _R	5.0							μA
Maximum reverse recovery time (NOTE 1)	t _{rr}	150				250	500		nS
Typical Junction Capacitance (NOTE 2)	C _J	15							pF
Operating Junction & Storage Temperature Range	T _J , T _{STG}	-55 to +150							℃

Note: 1. Reverse recovery condition $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.




FR151S THRU FR157S

RATINGS AND CHARACTERISTIC CURVES


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

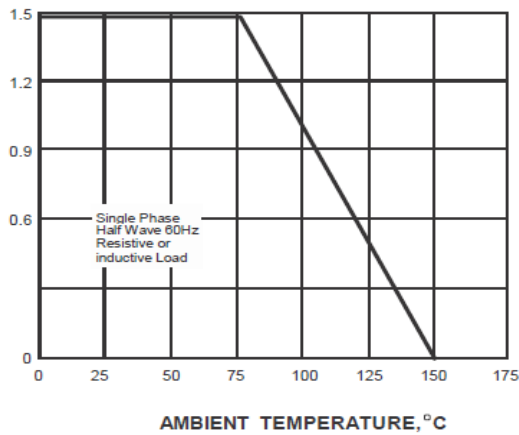


PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

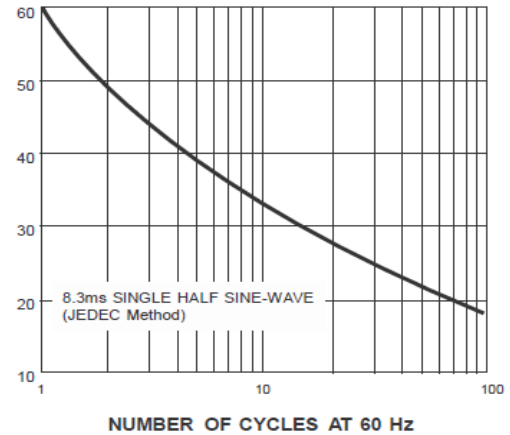


INSTANTANEOUS FORWARD
CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

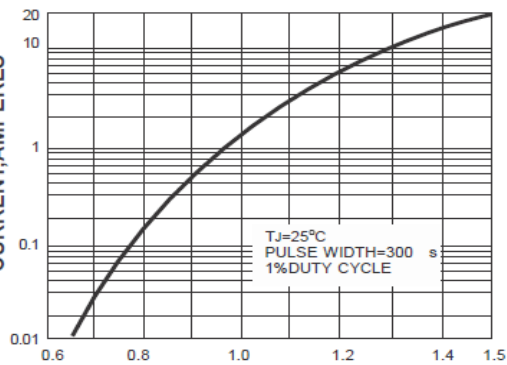


INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

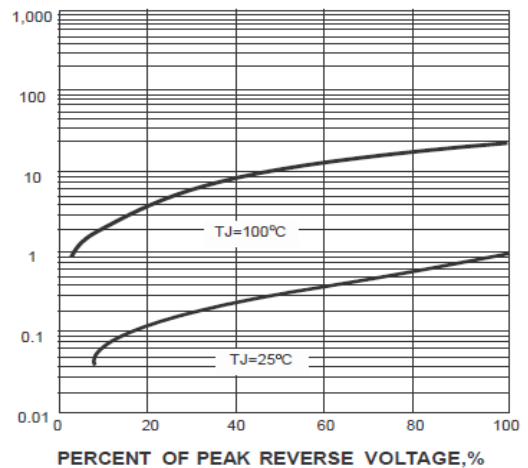

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

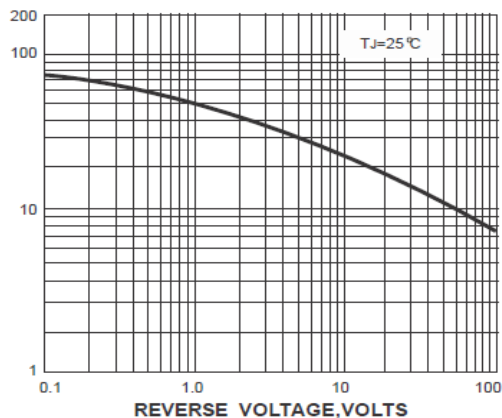

TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

