

16A FAST RECOVERY RECTIFIERS

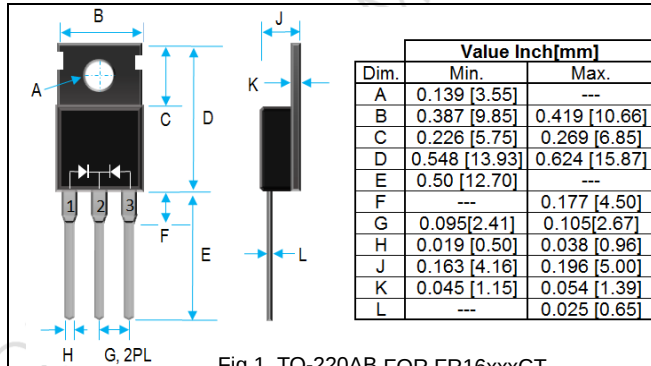


Fig 1. TO-220AB FOR FR16xxxCT

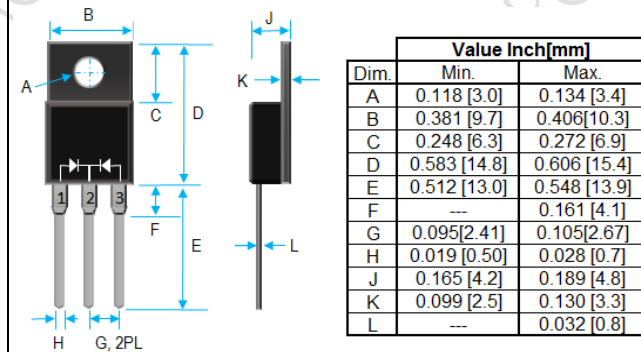


Fig 2. ITO-220AB FOR FR16xxxFCT

PRODUCT FEATURES

1. FLAMMABILITY CLASSIFICATION 94V-0
2. LOW FORWARD VOLTAGE V_F
3. FAST RECOVERY TIME
4. LOW THERMAL RESISTANCE/HIGH VOLTAGE
5. GLASS PASSIVATED CHIP JUNCTION
6. CASE: TRANSFER MOLDED
TO-220AB FOR FR1605CT THRU FR16100CT
ITO-220AB FOR FR1605FCT THRU FR16100FCT
7. DIMENSIONS IN INCHES AND (MILLIMETERS)
8. LEADS: SOLDERABILITY PER MIL-STD-202 METHOD 208
9. WEIGHT: 2.1 GRAMS (TO-220AB)
1.7 GRAMS (ITO-220AB)
10. RoHS COMPLIANT/HALOGEN FREE

ELECTRICAL CHARACTERISTICS

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED) AND ELECTRICAL CHARACTERISTICS

RATING	SYMBOL		UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT, SEE FIG.1	I_o	16 (PER DEVICE)	A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	150	A
TYPICAL JUNCTION CAPACITANCE @1MHz & REVERSE VOLTAGE 4V	C_j	65	pF
TYPICAL THERMAL RESISTANCE, JUNCTION TO CASE ON HEAT SINK	$R_{\theta jc}$	2.2 (PER LEG)	$^\circ\text{C/W}$
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO +175	$^\circ\text{C}$
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO +150	$^\circ\text{C}$
MAXIMUM FORWARD VOLTAGE AT 8A PER LEG	V_F	1.3	V
MAXIMUM REVERSE CURRENT AT 25°C	I_R	10	μA
MAXIMUM REVERSE CURRENT AT 125°C	I_R	500	μA


PART NUMBER	MAX RECURRENT PK REVERSE VOLTAGE/DC BLOCKING V_{RRM}/V_R (V)	MAX V_{RMS} (V)	MAX REVERSE RECOVERY TIME T_{RR} (nS)	MARKING
FR1605CT/FR1605FCT	50	35	150	SAME AS P/N
FR1610CT/FR1610FCT	100	70	150	SAME AS P/N
FR1620CT/FR1620FCT	200	140	150	SAME AS P/N
FR1640CT/FR1640FCT	400	280	150	SAME AS P/N
FR1660CT/FR1660FCT	600	420	250	SAME AS P/N
FR1680CT/FR1680FCT	800	560	500	SAME AS P/N
FR16100CT/FR16100FCT	1000	700	500	SAME AS P/N

NOTE : 1. REVERSE RECOVERY TEST CONDITIONS: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$.

2. CURRENT RATING IS BASED ON SINGLE PHASE, 1/2 WAVE, 60HZ, RESISTIVE, OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

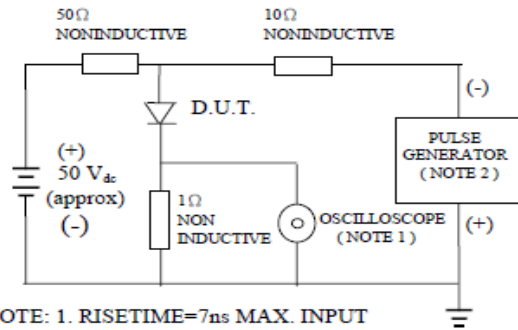

NOTE 1. RISE TIME = 7 ns MAX. INPUT IMPEDANCE = 1 MEGOHM 22PF
NOTE 2. RISE TIME = 10 ns MAX. SOURCE IMPEDANCE = 50 OHMS

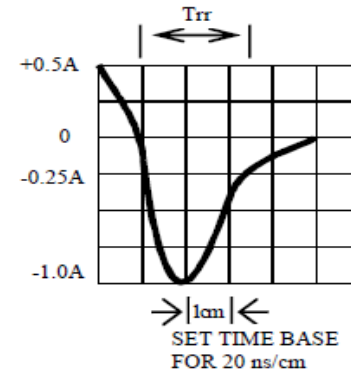


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

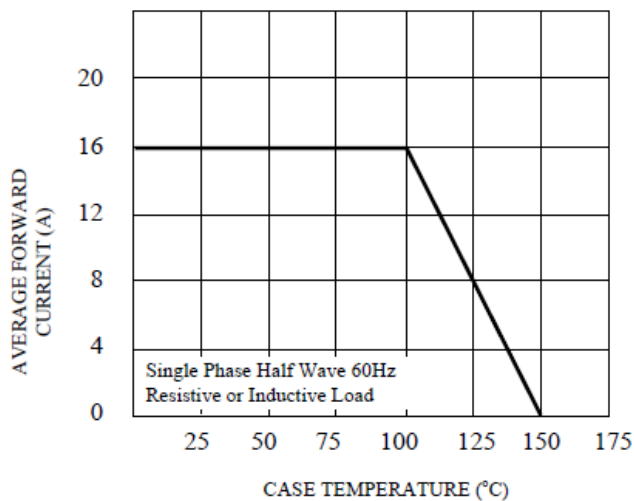


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

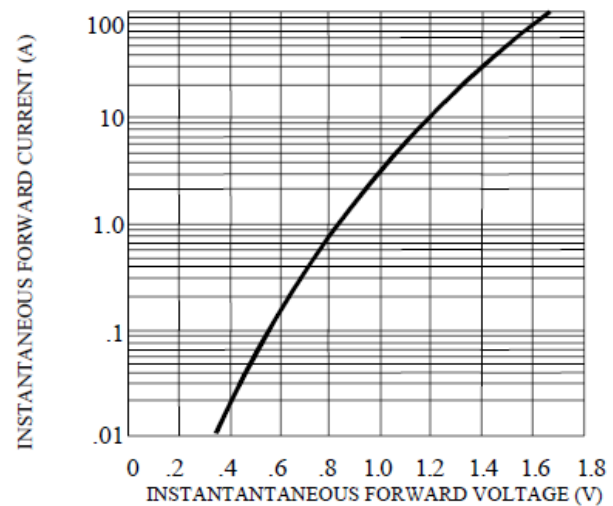


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

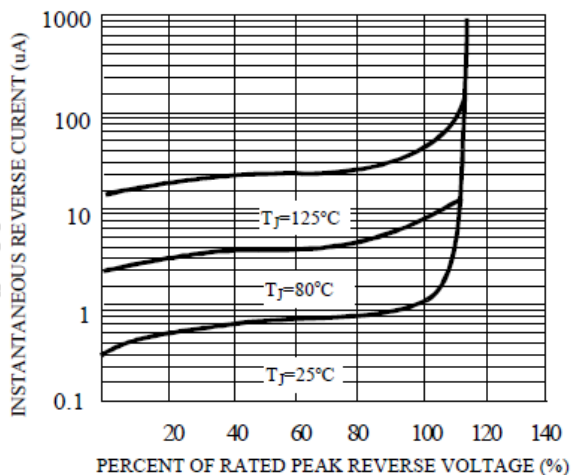


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

