



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

FR1A
THRU
FR1K

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT FAST RECOVERY RECTIFIER

VOLTAGE RANGE - 50 to 800 Volts

CURRENT - 1.0 Ampere

FEATURES

- * Ideal for surface mounted applications
- * Low leakage current
- * Glass passivated junction

MECHANICAL DATA


- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



SMB (DO-214AA)

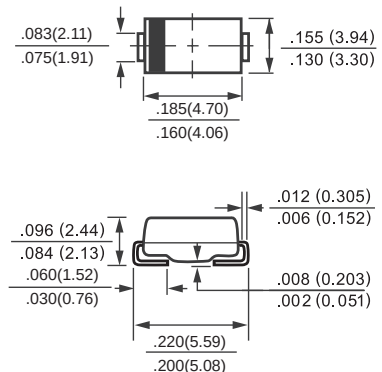

Dimensions in inches and (millimeters)

		SYMBOL	FR1A	FR1B	FR1D	FR1G	FR1J	FR1K	UNITS	
Maximum Recurrent Peak Reverse Voltage		VRRM	50	100	200	400	600	800	Volts	
Maximum RMS Voltage		VRMS	35	70	140	280	420	560	Volts	
Maximum DC Blocking Voltage		VDC	50	100	200	400	600	600	Volts	
Maximum Average Forward Rectified Current at TA = 75 °C		IO	1.0						Amps	
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		IFSM	30						Amps	
Maximum Instantaneous Forward Voltage at 1.0A DC		VF	1.3						Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage	@ TA = 25 °C	IR	5.0						uAmps	
	@ TA = 100 °C		150							
Maximum Reverse Recovery Time (Note 3)		trr	150			250	500		nSec	
Typical Thermal Resistance (Note 2)		RθJL	12							°C/W
Typical Junction Capacitance (Note 1)		CJ	30							pF
Operating and Storage Temperature Range		TJ,TSTG	-65 to + 175						°C	

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
2. Thermal Resistance (Junction to Ambient), 0.2x0.2in² (5X5mm²) copper pads to each terminal.
3. Test Conditions: IF=0.5A, IR=1.0A, IRR=0.25A.

RATING AND CHARACTERISTIC CURVES (FR1A THRU FR1K)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

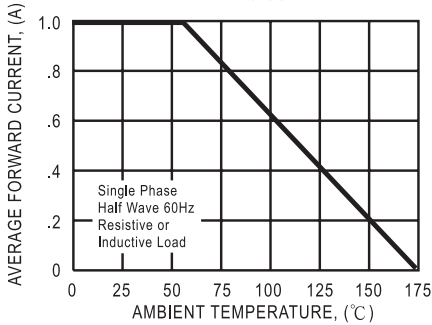


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

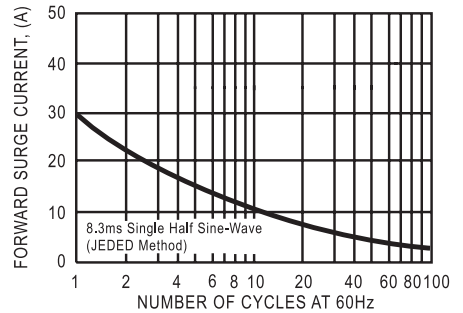


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

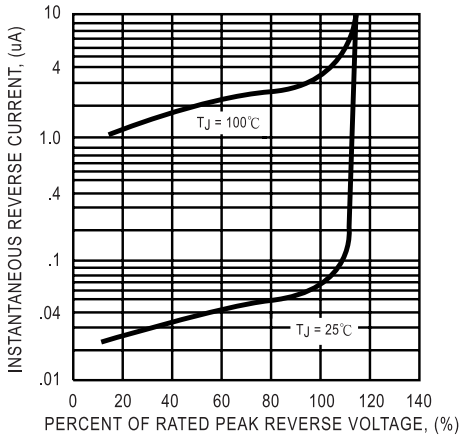


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

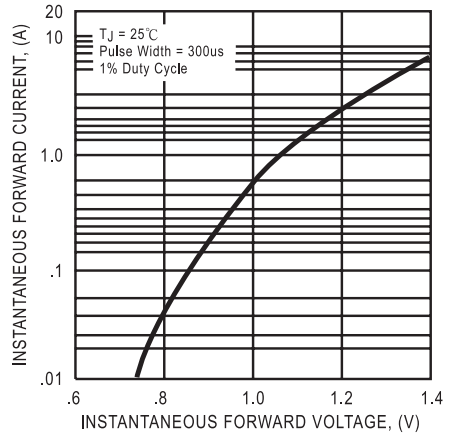


FIG. 5 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC


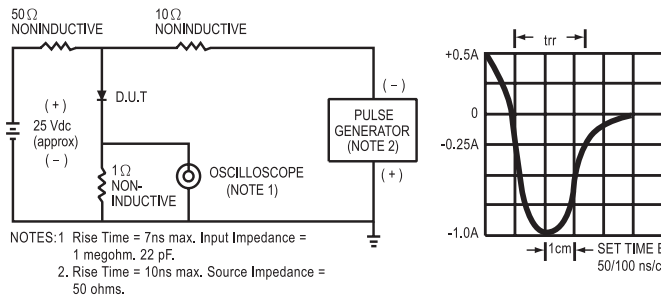


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

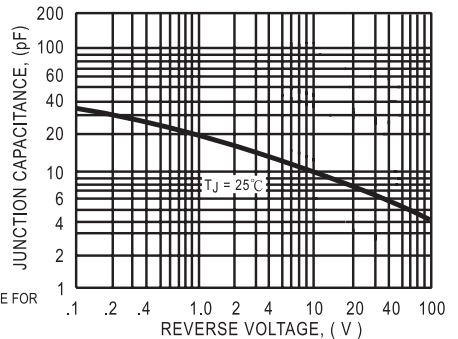

DC COMPONENTS CO., LTD.

Diode, Bridge
INDEX 2
Rectifiers

Diode, Bridge
INDEX 2
Rectifiers

Transistors,
INDEX 1
SCR, IC

Transistors,
INDEX 2
SCR, IC

