

FR201 THRU FR207

FAST RECOVERY RECTIFIERS

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 2.0 Ampere


FEATURES

- ◆ Low forward voltage drop
 - ◆ Low leakage current
 - ◆ High forward surge capability
 - ◆ High reliability
 - ◆ High temperature soldering guaranteed
- 260°C/10 seconds, 0.375" (9.5mm) lead length at 5 lbs(2.3kg) tension

Mechanical Data

- ◆ Case: Transfer molded plastic
- ◆ Epoxy: UL94V-0 rate flame retardant
- ◆ Polarity: Color band denotes cathode end
- ◆ Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- ◆ Mounting position: Any

DO-15

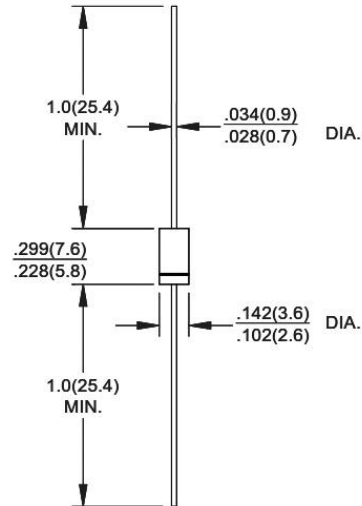

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOL	FR201	FR202	FR203	FR204	FR205	FR206	FR207	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_A=55^\circ\text{C}$	$I_{(AV)}$	2.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	60							Amps
Maximum instantaneous forward voltage at 1.5A	V_F	1.3							VOLTS
Maximum DC Reverse Current at $T_A=25^\circ\text{C}$	I_R	5.0							uA
Rated DC blocking voltage $T_A=100^\circ\text{C}$		100							
Maximum reverse recovery time (NOTE 1)	t_{rr}	150			250	500		ns	
Typical Junction Capacitance (Note 2)	C_J	40							pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	50							°C/W
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							°C

Note: 1. Reverse recovery condition $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$.

2. Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

3. Thermal resistance from junction to ambient at 0.375"(9.5mm) lead length, P.C.B. mounted.

FR201 THRU FR207

FAST RECOVERY RECTIFIERS

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 2.0 Ampere

RATING AND CHARACTERISTIC CURVES FR201 THRU FR207

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

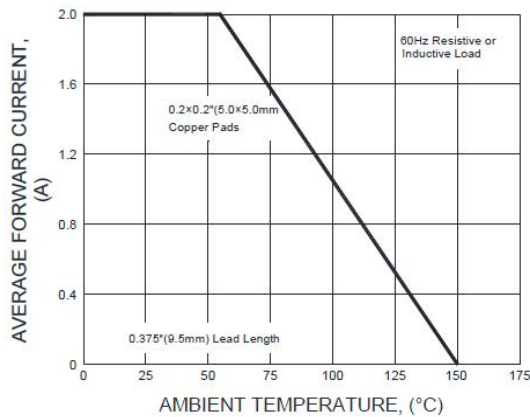


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

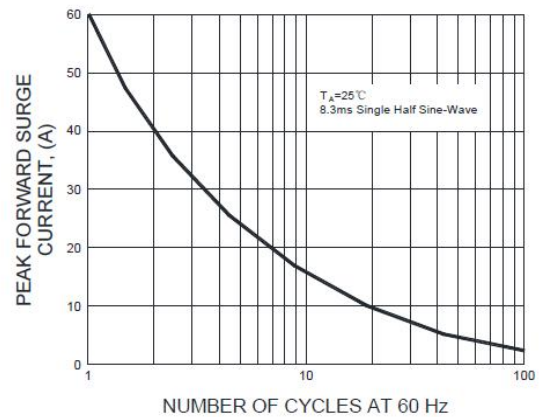


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

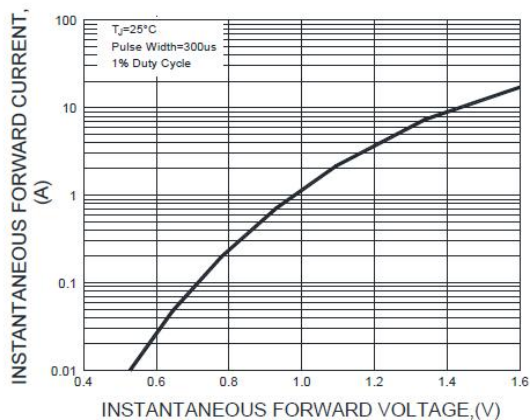


FIG.4-TYPICAL JUNCTION CAPACITANCE


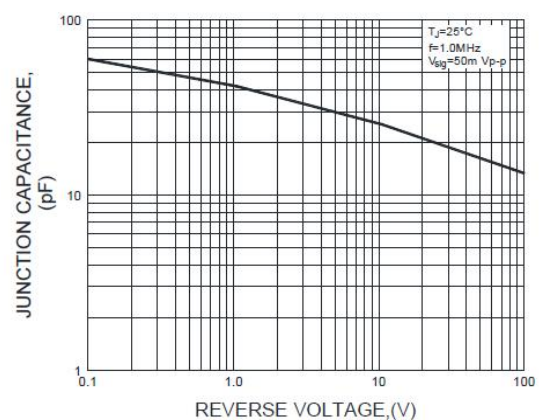


FIG.5-TEST CIRCUIT DIAGRAM AND FORWARD SURGE CURRENT

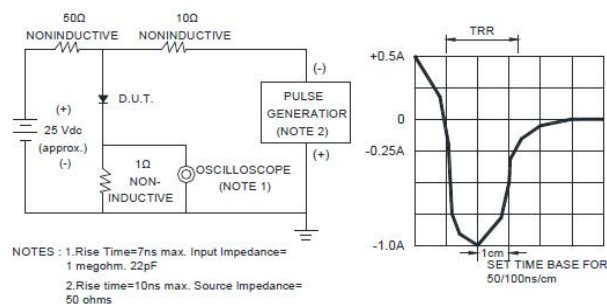

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.