



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

FR3A

THRU

FR3K

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT FAST RECOVERY RECTIFIER

VOLTAGE RANGE - 50 to 800 Volts

CURRENT - 3.0 Amperes

FEATURES

- * Ideal for surface mounted applications
- * Low leakage current
- * Glass passivated junction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 0.24 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS



Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.



SMC (DO-214AB)

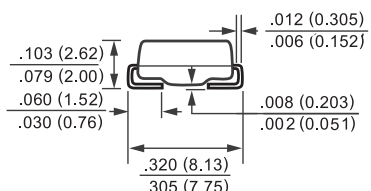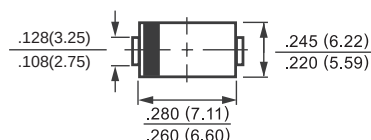

Dimensions in inches and (millimeters)

		SYMBOL	FR3A	FR3B	FR3D	FR3G	FR3J	FR3K	UNITS
Maximum Recurrent Peak Reverse Voltage		VRRM	50	100	150	200	300	400	Volts
Maximum RMS Voltage		VRMS	35	70	105	140	210	280	Volts
Maximum DC Blocking Voltage		VDC	50	100	150	200	300	400	Volts
Maximum Average Forward Rectified Current TA = 75°C		IO	3.0						Amps
Peak Forward Surge Current IFM(surge): 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		IFSM	100						Amps
Maximum Forward Voltage at 3.0A DC		VF	1.2						Volts
Maximum DC Average Reverse Current at	@ TA = 25°C	IR	10						uAmps
Rated DC Blocking Voltage	@ TA = 125°C		300						
Maximum Reverse Recovery Time (Note 3)		trr	150			250	500		nSec
Typical Thermal Resistance (Note 2)		RθJL	10						°C/W
Typical Junction Capacitance (Note 1)		CJ	60						pF
Operating and Storage Temperature Range		TJ, TSTG	-65 to + 175						°C

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0VDC

2. Thermal Resistance (Junction to Ambient), 0.4x0.4in² (10.0X10.0mm²) copper pads to each terminal.

3. Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A.

RATING AND CHARACTERISTIC CURVES (FR3A THRU FR3K)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

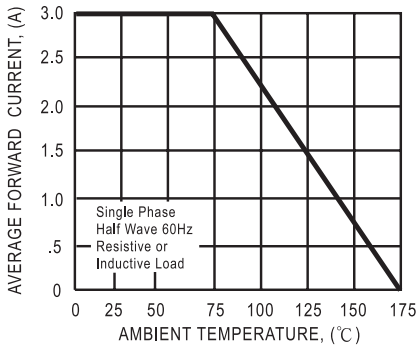


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

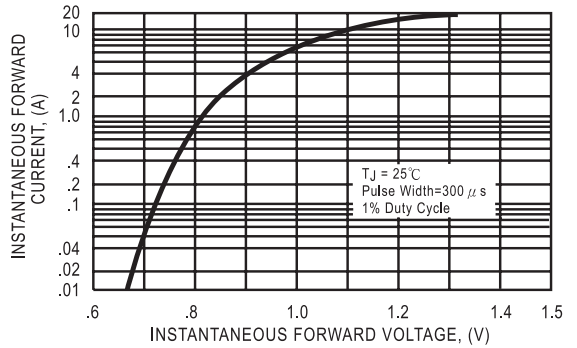


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

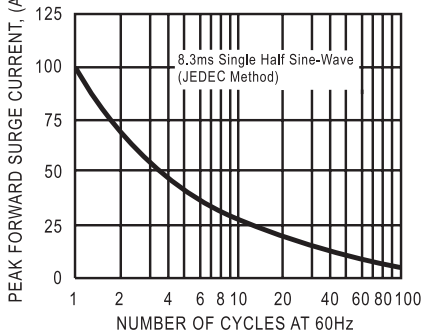


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

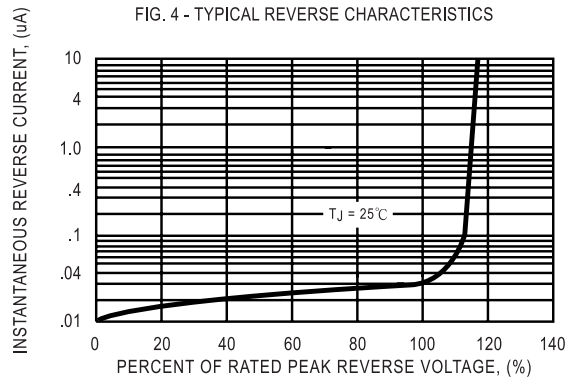


FIG. 6 - TYPICAL JUNCTION CAPACITANCE



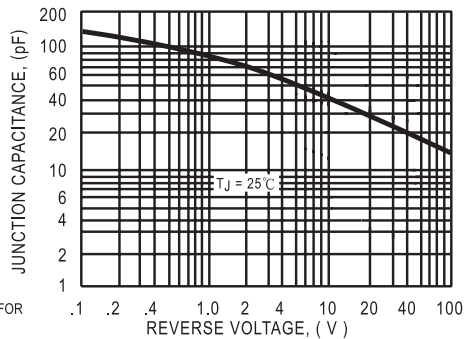


FIG. 5 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

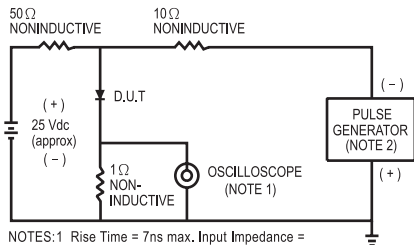

NOTES: 1 Rise Time = 7ns max. Input Impedance = 1 megohm, 22 pF.
2. Rise Time = 10ns max. Source Impedance = 50 ohms.



DC COMPONENTS CO., LTD.

Diode, Bridge
INDEX
Rectifiers

Diode, Bridge
INDEX
Rectifiers

Transistors,
INDEX
SCR, IC

Transistors,
INDEX
SCR, IC

