

## TO-220 Plastic-Encapsulate Voltage Regulator

**FS7810CTG** Three-terminal positive voltage regulator


### FEATURES

**Maximum Output current  $I_{OM}$ : 1.5 A**

**Output voltage  $V_o$ : 10 V**

**Continuous total dissipation**

**$P_D$ : 2 W ( $T_J = 25^\circ C$ )**

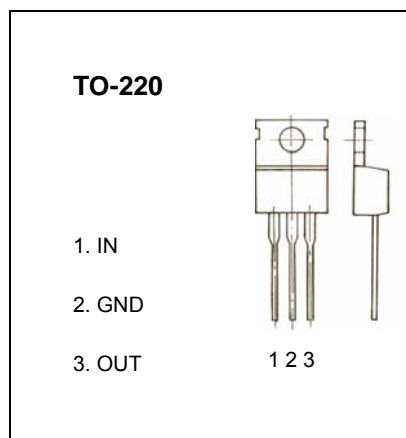

### ABSOLUTE MAXIMUM RATINGS(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal resistance junction-air	$R_{\theta JA}$	65	°C/W
Thermal resistance junction-cases	$R_{\theta JC}$	5	°C/W
Operating Junction Temperature Range	$T_{OPR}$	0-150	°C
Storage Temperature Range	$T_{STG}$	-65-150	°C

### ELECTRICAL CHARACTERISTICS( $V_i=17V, I_o=500mA, 0^\circ C < T_J < 125^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	$T_J=25^\circ C$	9.6	10	10.4	V
		$12.5V \leq V_i \leq 25V, I_o=5mA-1A, P \leq 15W$	9.5	10	10.5	V
Load Regulation	$\Delta V_o$	$T_J=25^\circ C, I_o=5mA-1.5A$		12	200	mV
		$T_J=25^\circ C, I_o=250mA-750mA$		4	100	mV
Line regulation	$\Delta V_o$	$12.5V \leq V_i \leq 28V, T_J=25^\circ C$		7	200	mV
		$14V \leq V_i \leq 20V, T_J=25^\circ C$		2	100	mV
Quiescent Current	$I_q$	$T_J=25^\circ C$		4.3	8	mA
Quiescent Current Change	$\Delta I_q$	$12.5V \leq V_i \leq 28V$			1	mA
	$\Delta I_q$	$5mA \leq I_o \leq 1A$			0.5	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5mA$		-1		mV/°C
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz$		70		μV
Ripple Rejection	$RR$	$13V \leq V_i \leq 23V, f=120Hz, T_J=25^\circ C$	55	71		dB
Dropout Voltage	$V_d$	$T_J=25^\circ C, I_o=1A$		2		V
Output resistance	$R_o$	$f=1KHz$		18		mΩ
Short Circuit Current	$I_{sc}$	$T_J=25^\circ C$		400		mA
Peak Current	$I_{pk}$	$T_J=25^\circ C$			2.2	A

### TYPICAL APPLICATION

