


SBD Type : FSL05A015

OUTLINE DRAWING

FEATURES

- *Similar to TO-220AC Case
- *Fully Molded Isolation
- *Extremely Low Forward Voltage Drop
- *Low Power Loss,High Efficiency
- *High Surge Capability



Maximum Ratings




Approx Net Weight: 1.7g

Rating	Symbol	FSL05A015			Unit
Repetitive Peak Reverse Voltage	V _{RRM}	15			V
Average Rectified Output Current	I _O	5	Tc=103°C	50 Hz half Sine Wave Resistive Load	A
RMS Forward Current	I _{F(RMS)}	7.85			A
Surge Forward Current	I _{FSM}	130	50Hz Half Sine Wave ,1cycle Non-repetitive		A
Operating JunctionTemperature Range	T _{jw}	-40 to +125			°C
Storage Temperature Range	T _{stg}	-40 to +125			°C
Mounting torque	F _{tor}	recommended torque = 0.5			N•m


Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j= 25^{\circ}\text{C}, V_{RM}= V_{RRM}$	-	-	5	mA
Peak Forward Voltage	V_{FM}	$T_j= 25^{\circ}\text{C}, I_{FM}= 5 \text{ A}$	-	-	0.38	V
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	5	$^{\circ}\text{C} / \text{W}$
	$R_{th(c-f)}$	Cace to Fin	-	-	1.5	$^{\circ}\text{C} / \text{W}$


FSL_A_ OUTLINE DRAWING (Dimensions in mm)

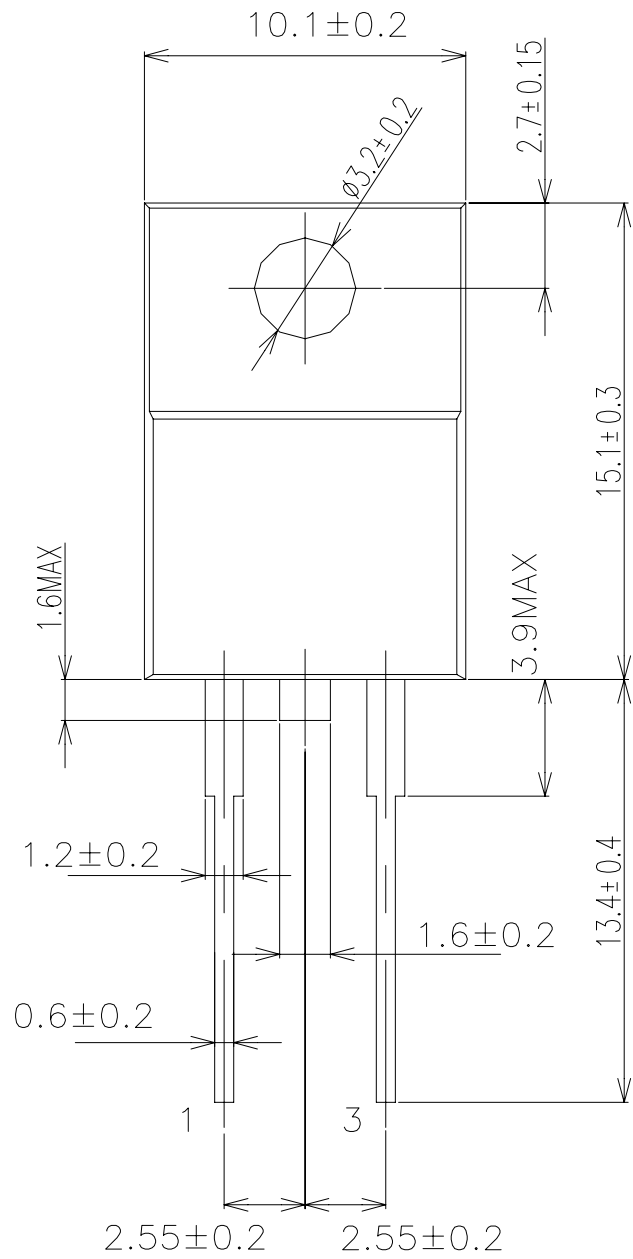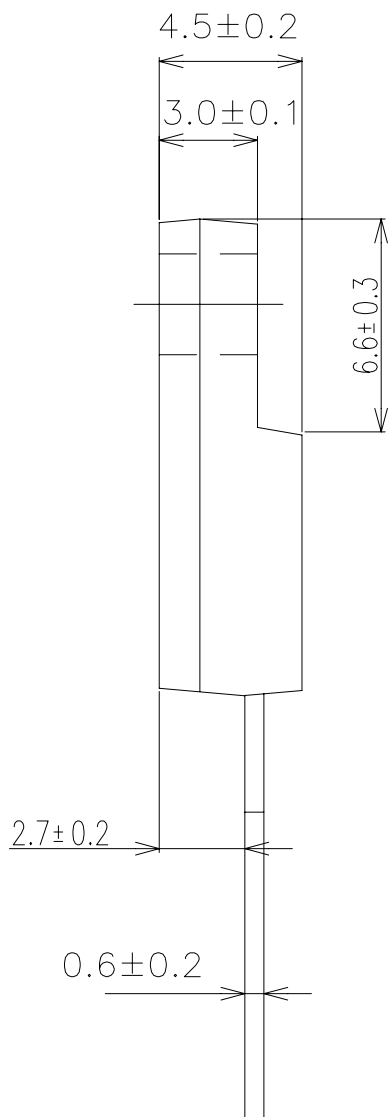

FORWARD CURRENT VS. VOLTAGE

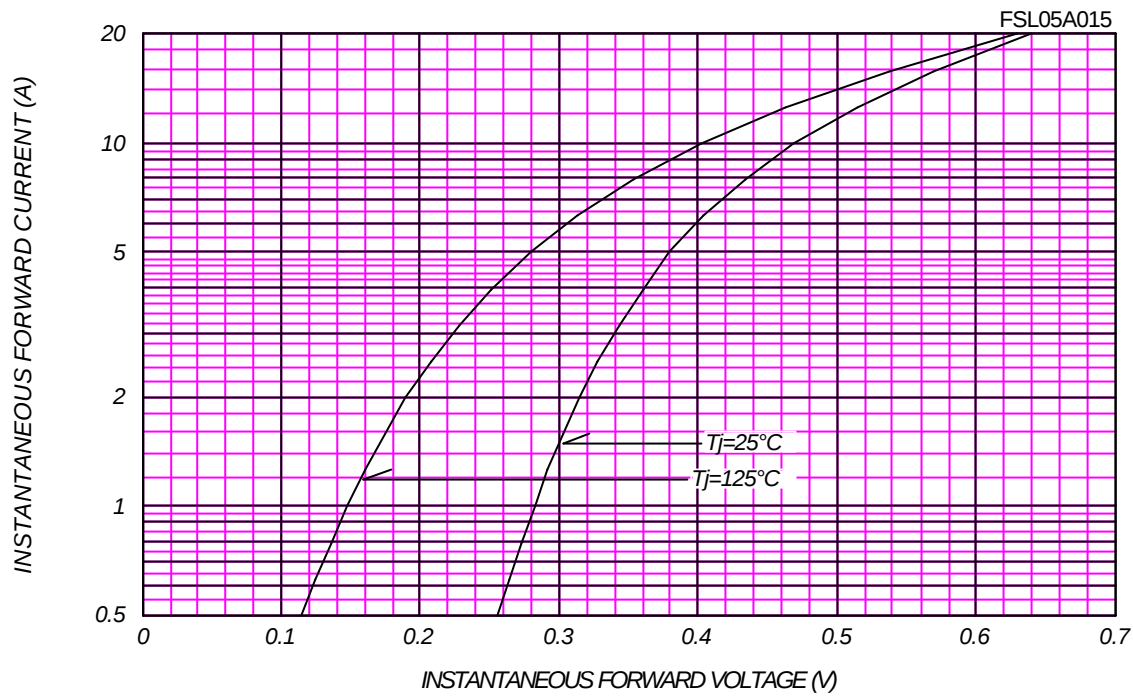

AVERAGE FORWARD POWER DISSIPATION

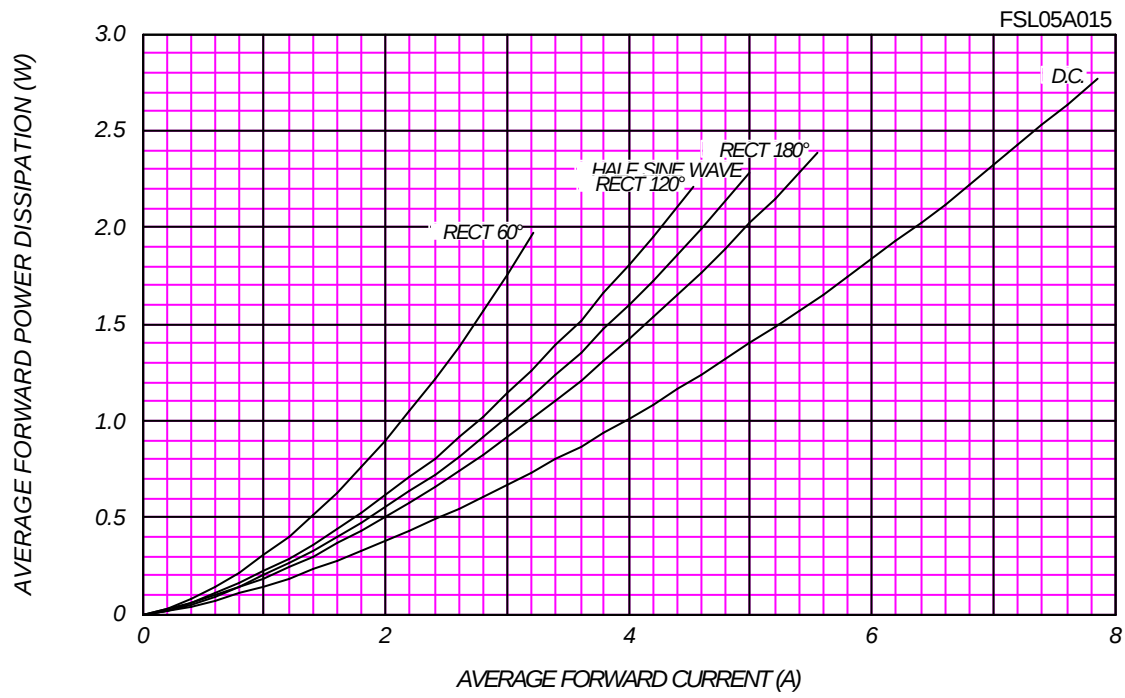



PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGE

Tj= 125 °C



AVERAGE REVERSE POWER DISSIPATION

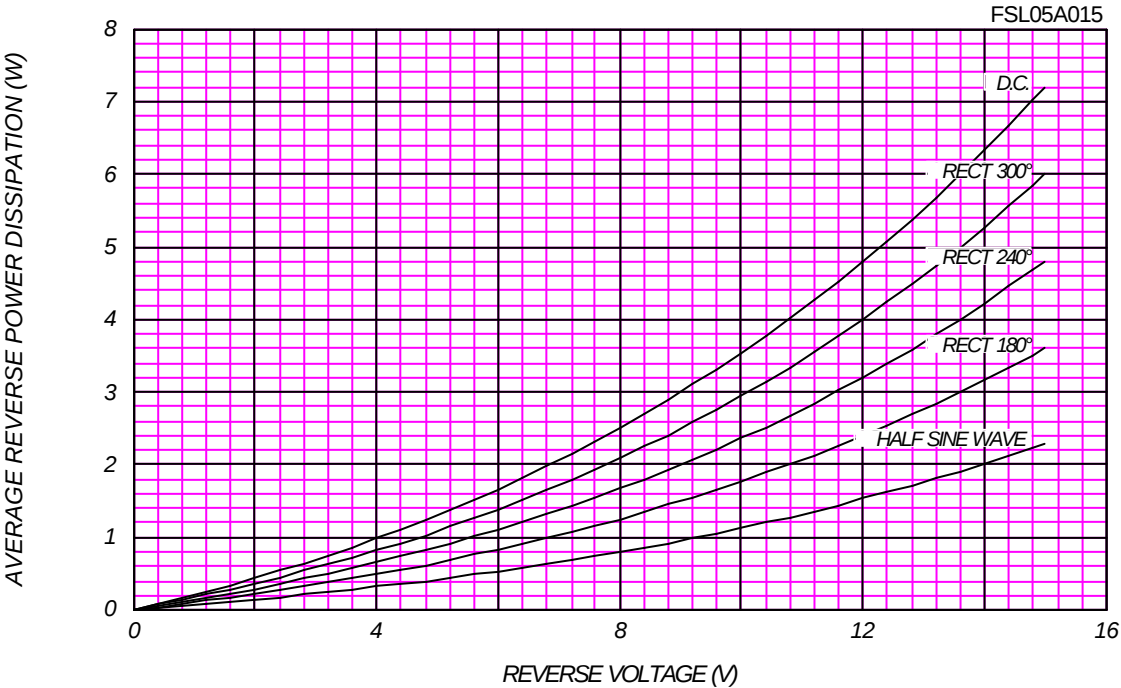




AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

$V_{RM}=15V$


FSL05A015

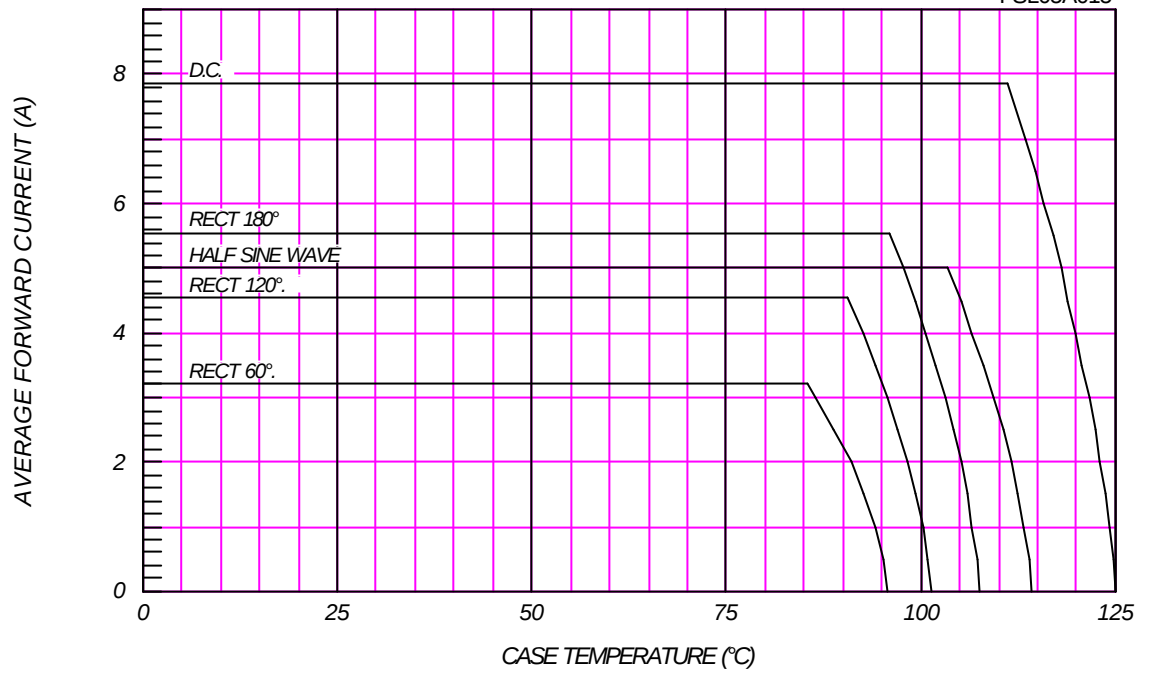

SURGE CURRENT RATINGS

$f=50\text{Hz}$, Sine Wave, Non-Repetitive, No Load

FSL05A015

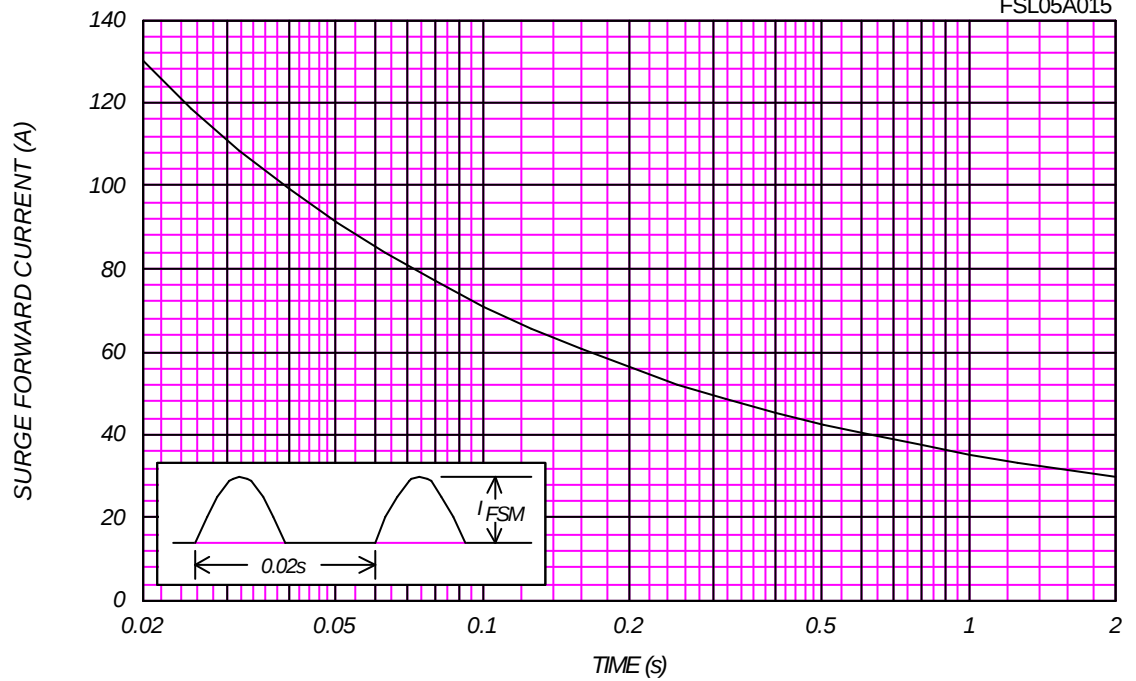

JUNCTION CAPACITANCE VS. REVERSE VOLTAGE

$T_j=25^{\circ}\text{C}$, $V_m=20\text{mV}_{\text{RMS}}$, $f=100\text{kHz}$, Typical Value

FSL05A015

