

**M•C•C**

Micro Commercial Components  
21201 Itasca Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

**FST6210**  
**THRU**  
**FST6220**

## Features

- Metal of siliconrectifier, majority carrier conductor
- Guard ring for transient protection
- Low power loss high efficiency
- High surge capacity, High current capability


## Maximum Ratings

- Operating Temperature: -40°C to +125°C
- Storage Temperature: -40°C to +125°C

MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
FST6210	10V	7V	10V
FST6215	15V	10.5V	15V
FST6220	20V	14V	20V

**60 Amp Schottky  
Barrier Rectifier  
10 to 20 Volts**

## MINIMOD

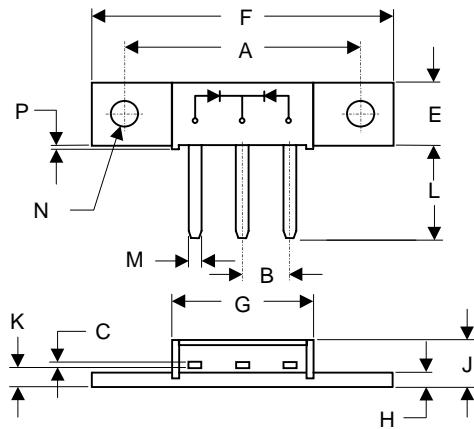

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	60 A	$T_A = 105^\circ C$
Peak Forward Surge Current	$I_{FSM}$	600A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	$V_F$	.43V	$I_{FM} = 30A$ ; $T_A = 25^\circ C$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	3mA	$T_A = 25^\circ C$


\*Pulse Test: Pulse Width 300μsec, Duty Cycle 1%

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	1.180	1.195	29.97	30.35	
B	.200	REF	5.08	REF	2PL
C	.027	.037	0.69	0.94	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	Ø
P	.015	.025	0.38	0.64	

# FST6210 thru FST6220


**M·C·C·**

Figure 1  
Typical Forward Characteristics

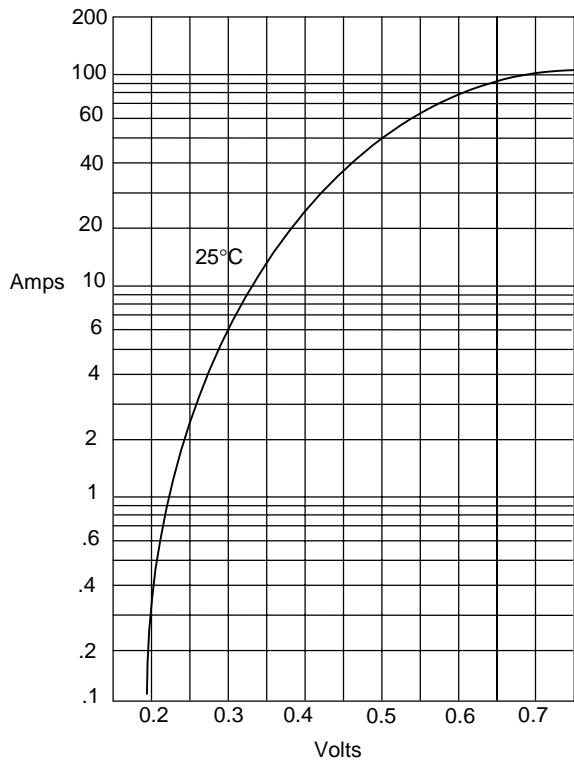


Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

Figure 2  
Forward Derating Curve

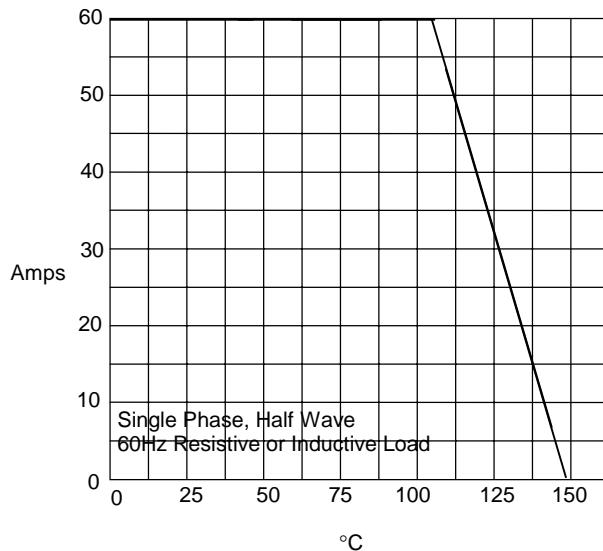

Average Forward Rectified Current - Amperes versus  
Ambient Temperature - °C

Figure 3  
Junction Capacitance

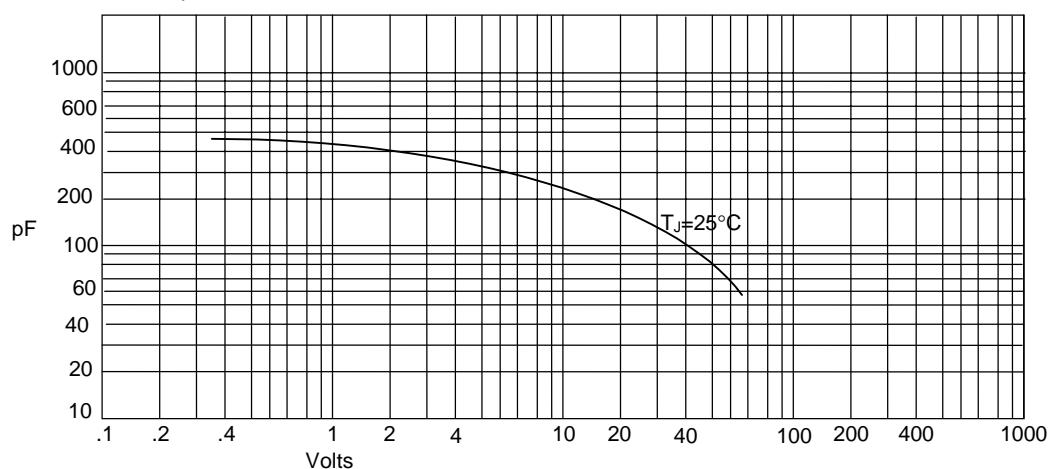


Junction Capacitance - pF versus  
Reverse Voltage - Volts

## FST6210 thru FST6220


M•C•C

Figure 4  
Typical Reverse Characteristics

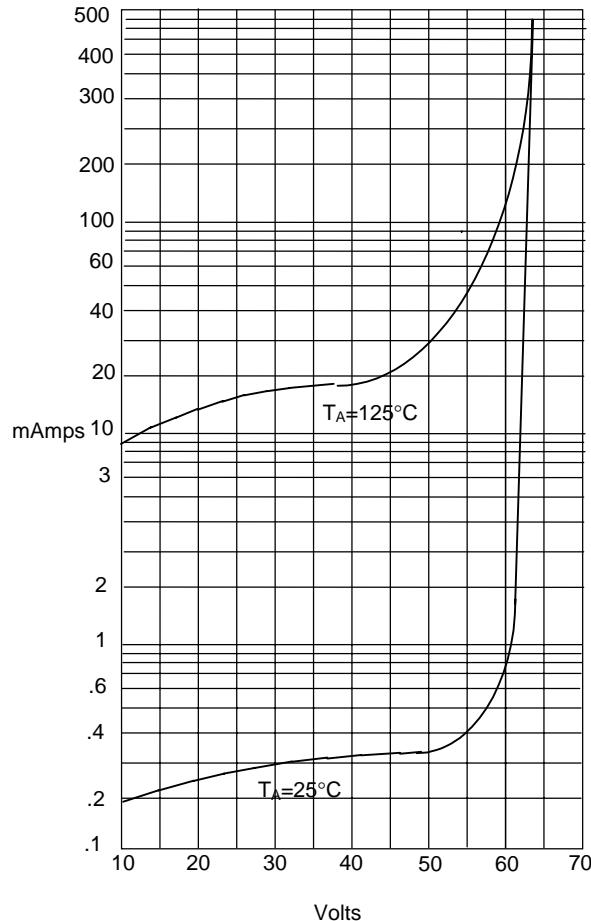

Instantaneous Reverse Leakage Current - MicroAmperes versus  
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5  
Peak Forward Surge Current

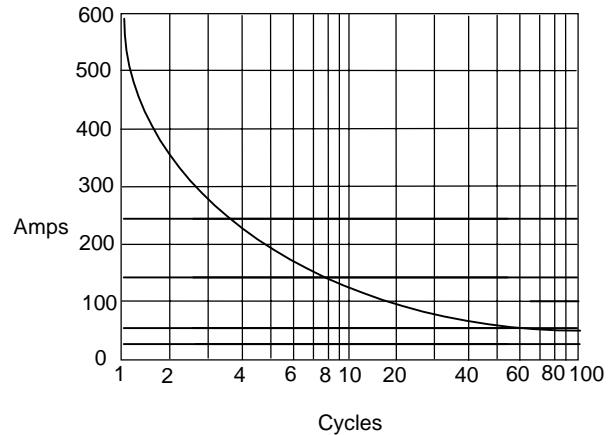

Peak Forward Surge Current - Amperes versus  
Number Of Cycles At 60Hz - Cycles