

G8NW


Micro-mini dual PCB relay for automobile use (2 independent circuits)

**High-density design
(smallest class in the
industry)**

**Half-size in comparison
with the existing type**

(Omron G8QW)

- 2 single, independent relays in 1 case.
- Optimum for reverse motor control for a window motor, wiper motor, etc.

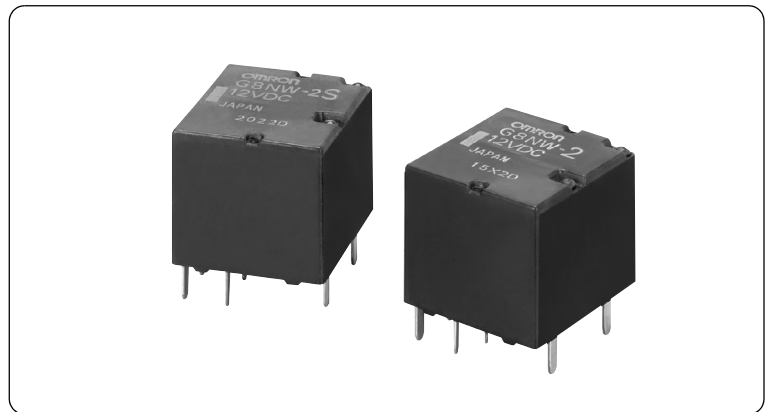

■ Purpose

- DC motor control for automobile parts (Door lock motor, power window motor, sunroof motor, etc.)
- Flasher lamp (indicator or hazard)

■ Type standard

G8NW-□□

① ② ③

	Classification	Symbol	Meaning of the symbol
①	Basic type	G8NW	Micro-mini dual relay for automobile use
②	Number of contact poles and configuration	2	Standard contact configuration 2c
③	Spec/Appropriate symbol	Blank	Standard Spec
		English character	Appropriate Spec (set individually)

■ Ratings/Performance

Type			G8NW-2	G8NW-2S	G8NW-2L	G8NW-2H	G8NW-2U	G8NW-2F
Item			Standard	Low operating voltage	High heat resistance	High heat resistance and Low operating voltage	Super low operating voltage	For flasher lamp
Coil	Rated coil voltage		12 VDC					
	Coil resistance (at 20°C)		225 Ω	180 Ω	225 Ω	180 Ω	130 Ω	
	Service voltage range		10 to 16 VDC					
	Operating voltage (at 20°C)		7.2 V or less	6.5 V or less	7.2 V or less	6.5 V or less	5.5 V or less	7.2 V or less
	Release voltage (at 20°C)		1.0 V or more				0.8 V or more	
	Max value of rated coil voltage (5A)		14 VDC (continuous) 16 VDC at 15 min	12 VDC (continuous) 16 VDC at 5 min	16 VDC (continuous)	14 VDC (continuous) 16 VDC at 15 min	16 VDC at 3 min	16 VDC (a fleeting moment) 85 times/min
Contact	Contact configuration		1c × 2 (SPDT × 2)					
	Contact material		AgSn type (non-cadmium)					PdRu alloy
	Rated load		14 VDC 25 A Motor load					54 W lamp 85 times/min Polarized (No. 3 terminal+)
	Max switching current		30 A					
Endurance (Lifetime)	Mechanical		1,000,000 times					10,000,000 times
	Electrical (Rated load)		100,000 times					2000 hrs
Mechanical	Impact resistance	Malfunction	100 m/s ²					
		Destruction	1,000 m/s ²					
	Vibration resistance	Malfunction	10~55 Hz, Peak to peak: 1.5 mm					
		Destruction	10~55 Hz, Peak to peak: 1.5 mm					
Ambient temperature range			-40~-+85°C		-40~-+105°C		-40~-+85°C	
Weight			About 8.0 g					

Reference data



Operating voltage/Release voltage

Sample: G8NW-2S 12 VDC 225 Ω 30 pcs

Operating time/Release time

Sample: G8NW-2S 12 VDC 225 Ω 50 pcs

Diode to absorb coil surge,
without resistor

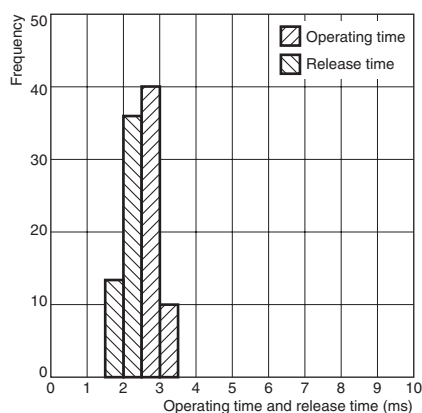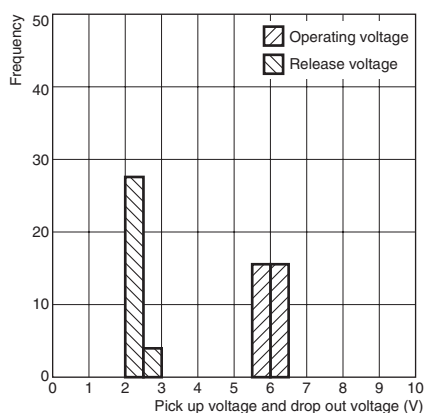




Contact resistance

Sample: G8NW-2S 12 VDC 180 Ω 30 pcs

Sample: G8NW-2S 12 VDC 180 Ω 30 pcs

Coil temperature rise

Sample: G8NW-2S 12 VDC 180 Ω 3 pcs

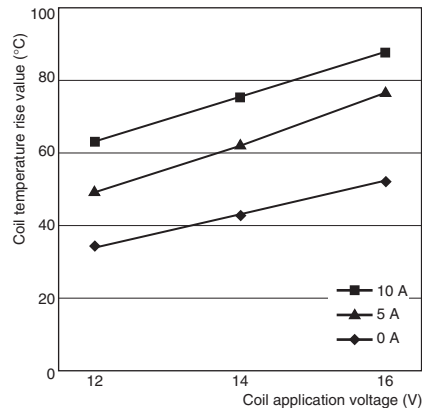
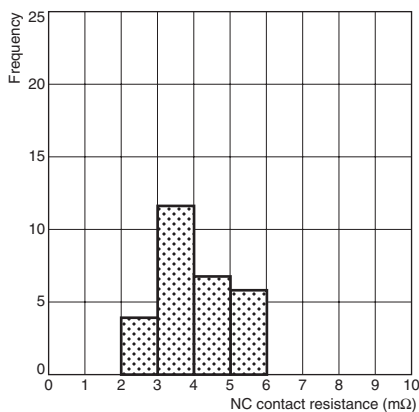
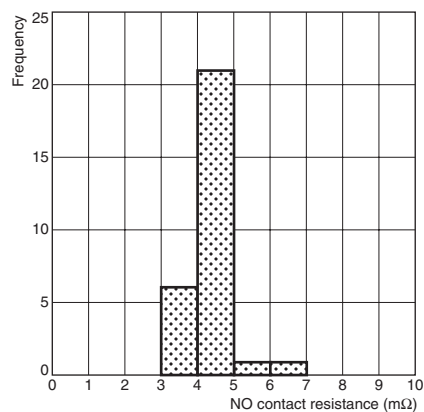


Ambient temperature and service voltage range (Cold start)

G8NW-2

G8NW-2S

G8NW-2U

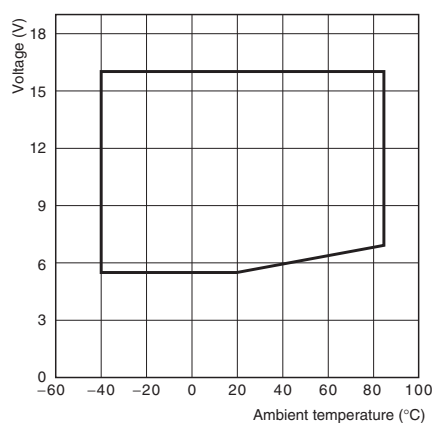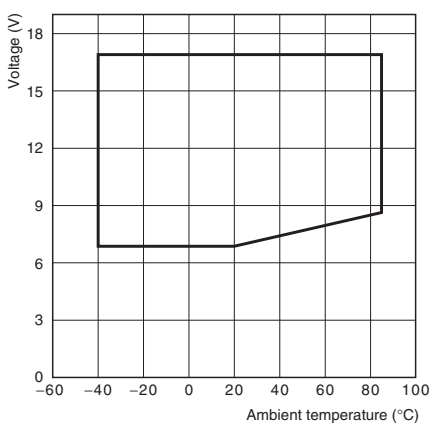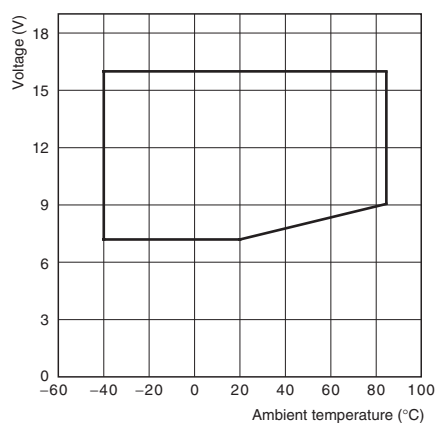



Reference data

Electrical endurance (Lifetime)

Spec	Application/Load	Load current	Switching frequency	Switching time
G8NW-2H	Power window motor	Motor lock current (Input 31 A/Breaking 27 A)	On1 s/Off9 s	60,000
G8NW-2F	Hazard lamp 110.4 W	Input 8.3 A Steady 4 A	On0.35 s/Off0.3 s	510,000

Contour dimension (Unit: mm)

G8NW

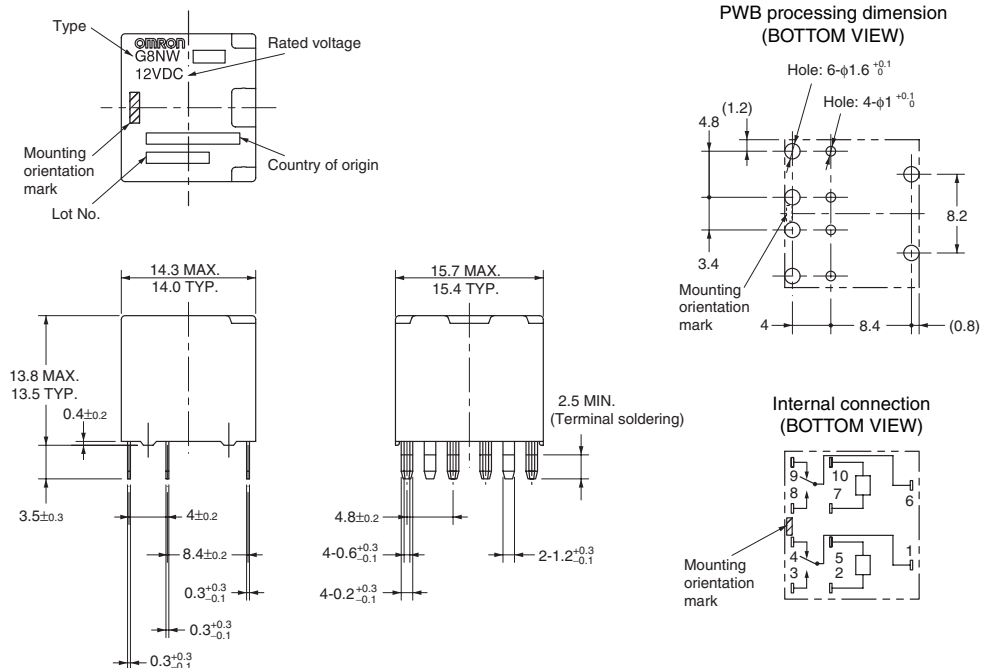

* Tolerance unless otherwise specified
 Less than 1 mm: ±0.1 mm
 Less than 1~3 mm: ±0.2 mm
 3 mm or more: ±0.3 mm