

**3.6V 500mA/400mA<sup>+</sup> Low Dropout Regulator****Features**

- Dropout voltage typically 0.9V @  $I_o = 500\text{mA}$
- Output current in excess of 500mA/400mA<sup>+</sup>
- Output voltage accuracy  $\pm 2\%$
- Quiescent current, typically 0.6mA
- Internal short circuit current limit
- Internal over temperature protection

**General Description**

The G936 positive 3.6V voltage regulator features the ability to source 500mA/400mA<sup>+</sup> of output current with a dropout voltage of typically 0.9V/0.65V. A low quiescent current is provided. The typical quiescent current is 0.6mA.


[<sup>+</sup> For SOT-89 package only]

Familiar regulator features such as over temperature and over current protection circuits are provided to prevent it from being damaged by abnormal operating conditions.

**Ordering Information**

ORDER NUMBER	PACKAGE TYPE	PIN OPTION		
		1	2	3
G936T24U	SOT89	GND	V <sub>IN</sub>	V <sub>OUT</sub>
G936T65U	SOT223	V <sub>IN</sub>	GND	V <sub>OUT</sub>

\* For other package types, pin options and package, please contact us at sales @gmt.com.tw

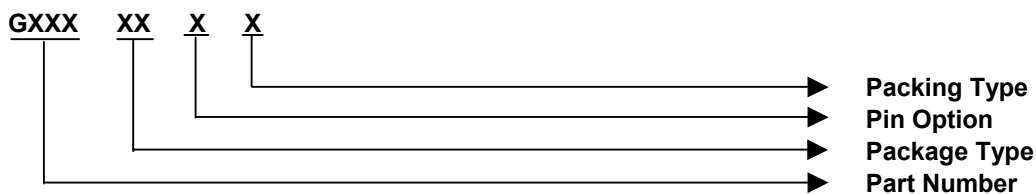**Order Number Identification****PACKAGE TYPE**

T2 : SOT 89  
T6 : SOT 223  
T7 : SOT 23  
T8 :  $\mu\text{TO}92$

**PIN OPTION**





	1	2	3
1 :	V <sub>OUT</sub>	GND	V <sub>IN</sub>
2 :	V <sub>OUT</sub>	V <sub>IN</sub>	GND
3 :	GND	V <sub>OUT</sub>	V <sub>IN</sub>
4 :	GND	V <sub>IN</sub>	V <sub>OUT</sub>
5 :	V <sub>IN</sub>	GND	V <sub>OUT</sub>
6 :	V <sub>IN</sub>	V <sub>OUT</sub>	GND

**PACKING**

U & D : Tape & Reel Direction  
T : Tube  
B : Bag

**Typical Application**

[Note 4] : Type of C<sub>OUT</sub>

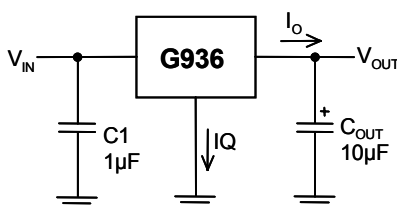**Package Type**



<b>Absolute Maximum Ratings</b>	(Note 1)
Input Voltage.....	10V
Power Dissipation Internally Limited (Note2)	
Maximum Junction Temperature.....	130°C
Storage Temperature Range.....	-65°C ≤ T <sub>J</sub> ≤ +150°C
Lead Temperature, Time for Wave Soldering SOT 89, SOT 223 Package.....	260°C, 4s
Continuous Power Dissipation (T <sub>A</sub> = + 25°C) SOT 89 <sup>(1)</sup> .....	0.42W
SOT 223 <sup>(1)</sup> .....	0.65W

Note <sup>(1)</sup>: See Recommended Minimum Footprint.

<b>Operating Conditions</b>	(Note 1)
Input Voltage.....	4V ~ 7V
Temperature Range.....	0°C ≤ T <sub>J</sub> ≤ 125°C

## Electrical Characteristics

V<sub>IN</sub> = 5V, I<sub>O</sub> = 500mA/400mA+, C<sub>IN</sub>=1μF, C<sub>OUT</sub> =10μF. All specifications apply for T<sub>A</sub> = T<sub>J</sub> = 25°C. [Note 3]

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	10mA ≤ I <sub>O</sub> ≤ 500mA	3.528	3.6	3.672	V
	10mA ≤ I <sub>O</sub> ≤ 400mA <sup>+</sup>				
Line Regulation	4V ≤ V <sub>IN</sub> ≤ 7V, I <sub>O</sub> = 50mA		5		mV
Load Regulation	10mA ≤ I <sub>O</sub> ≤ 500mA		58		mV
	10mA ≤ I <sub>O</sub> ≤ 400mA <sup>+</sup>		50		
Output Impedance	200mA DC and 100mA AC, f <sub>O</sub> = 120Hz		140		mΩ
Quiescent Current	V <sub>IN</sub> = 5V		0.6		mA
Ripple Rejection	f <sub>i</sub> = 120 Hz, 1V <sub>P-P</sub> , I <sub>O</sub> = 100mA		42		dB
Dropout Voltage	I <sub>O</sub> = 500mA		0.9		V
	I <sub>O</sub> = 400mA <sup>+</sup>		0.65		
	I <sub>O</sub> = 50mA		80		mV
Output Current	Continuous Test T <sub>A</sub> = 25°C, T <sub>J</sub> < 125°C, V <sub>OUT</sub> within ±2% (Note 2)	V <sub>IN</sub> = 5.1V, Mounted on SOT 223 Recommended Minimum Footprint	400		mA
		V <sub>IN</sub> = 4.8V, Mounted on SOT 89 Recommend Minimum Footprint	300 <sup>+</sup>		
Short Circuit Current			0.77		A
Over Temperature			125		°C

[<sup>+</sup> for SOT-89 Package only]

**Note 1:** Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Conditions are conditions under which the device functions but the specifications might not be guaranteed. For guaranteed specifications and test conditions see the Electrical Characteristics.

**Note2:** The maximum power dissipation is a function of the maximum junction temperature, T<sub>Jmax</sub>; total thermal resistance, θ<sub>JA</sub>, and ambient temperature T<sub>A</sub>. The maximum allowable power dissipation at any ambient temperature is T<sub>Jmax</sub> - T<sub>A</sub> / θ<sub>JA</sub>. If this dissipation is exceeded, the die temperature will rise above 130°C and the G936 will go into thermal shutdown. For the G936 in SOT 89 package, θ<sub>JA</sub> is 250°C/W and in the SOT223 package is 156°C/W (See Recommend Minimum Footprint). The safe operation in SOT 89 & SOT 223 package of G936, it can see "Typical Performance Characteristics" (Safe Operating Area).

**Note3:** Low duty pulse techniques are used during test to maintain junction temperature as close to ambient as possible.

**Note4:** The type of output capacitor should be tantalum or aluminum.

## Definitions

### Dropout Voltage

The input/output Voltage differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 100mV below its nominal value, dropout voltage is affected by junction temperature, load current and minimum input supply requirements.

### Line Regulation

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

### Load Regulation

The change in output voltage for a change in load current at constant chip temperature. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

### Maximum Power Dissipation

The maximum total device dissipation for which the regulator will operate within specifications.

### Quiescent Bias Current


Current which is used to operate the regulator chip and is not delivered to the load.



### Typical Performance Characteristics


( $V_{IN}=5V$  ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=10\mu F$ ,  $T_A=25^\circ C$  , unless otherwise noted.)

#### Line Transient

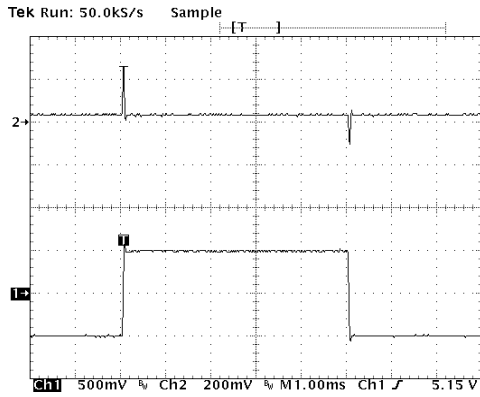


Ch1:  $V_{in}$  (offset=5.00V)  
Ch2:  $V_{out}$  (offset=3.600V)  
 $I_{out}=100mA$

#### Load Transient

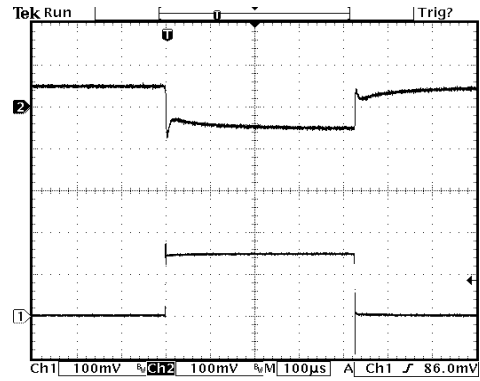


Ch1:  $I_{out}$  (400mA/div)  
Ch2:  $V_{out}$  (offset=3.600V)


#### Output Voltage vs. Load Current

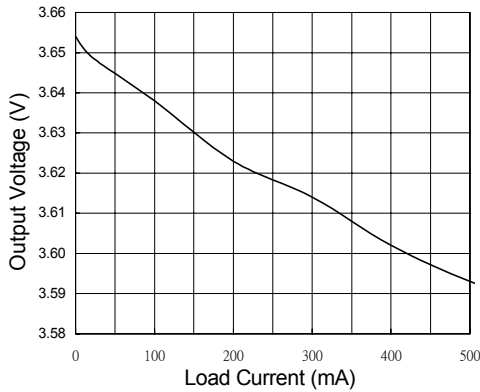

#### Dropout Voltage vs. Load Current

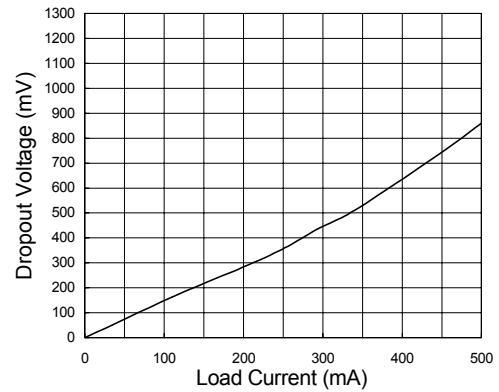





#### Ground Current vs. Load Current

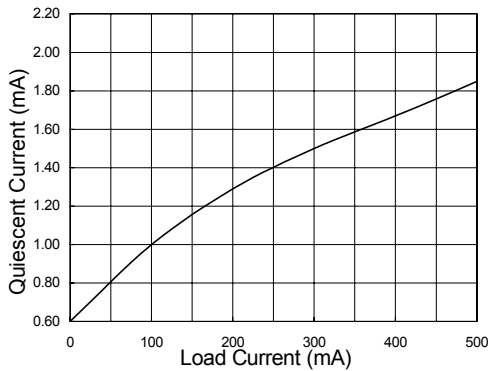





Typical Performance Characteristics


(VIN=5V, CIN=1μF, COUT =10μF, TA=25°C, unless otherwise noted.)

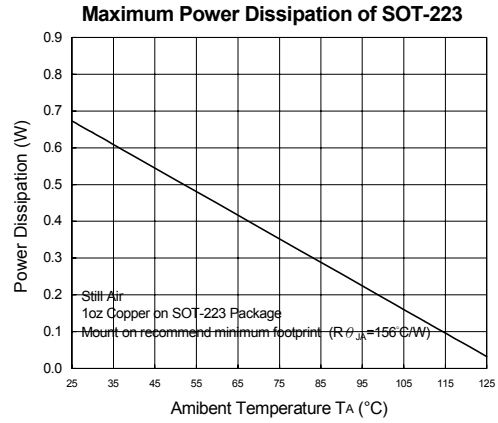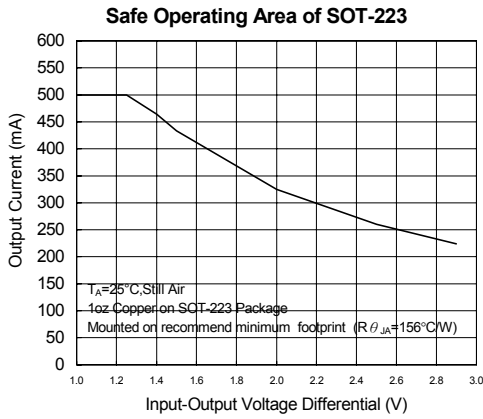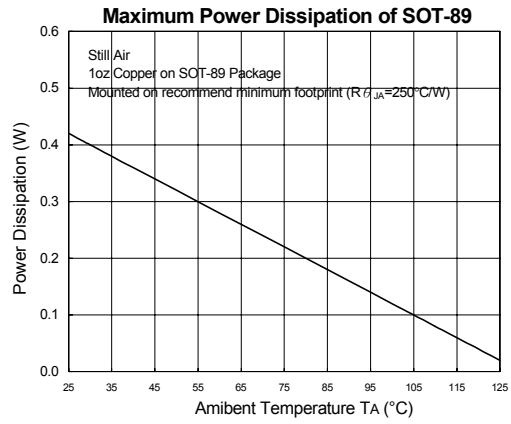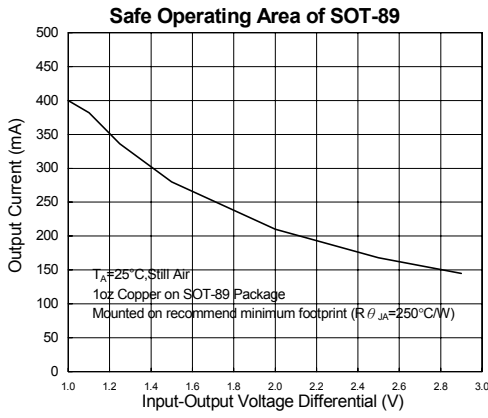

Recommend Minimum Footprint






Package Information

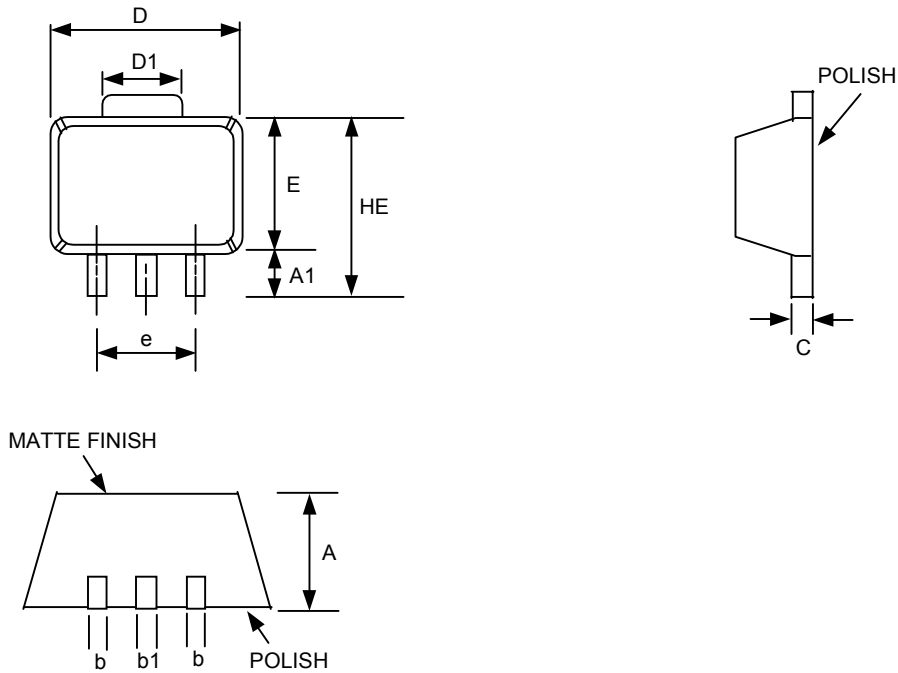


SOT 89 (T2) Package

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.40	1.50	1.60	0.055	0.059	0.063
A1	0.80	1.04	-----	0.031	0.041	-----
b	0.36	0.42	0.48	0.014	0.016	0.048
b1	0.41	0.47	0.53	0.016	0.018	0.020
C	0.38	0.40	0.43	0.014	0.015	0.017
D	4.40	4.50	4.60	0.173	0.177	0.181
D1	1.40	1.60	1.75	0.055	0.062	0.069
HE	-----	-----	4.25	-----	-----	0.167
E	2.40	2.50	2.60	0.094	0.098	0.102
e	2.90	3.00	3.10	0.114	0.118	0.122

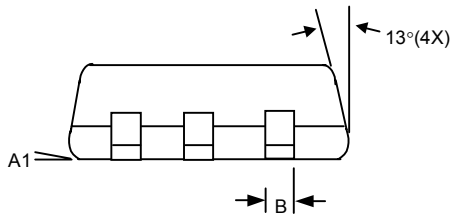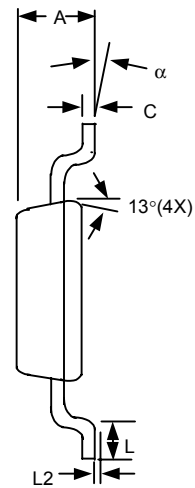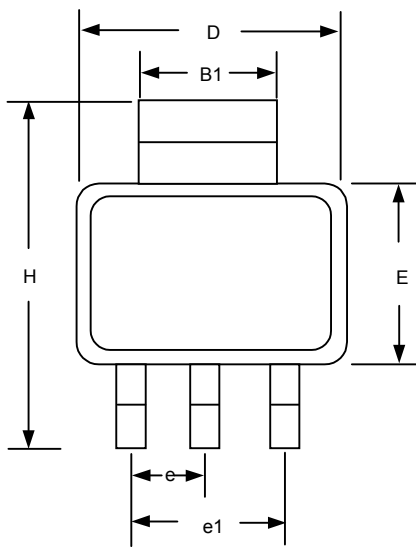

SOT 223 (T6) Package

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.55	1.80	0.061	0.071
A1	0.02	0.12	0.0008	0.0047
B	0.60	0.80	0.024	0.031
B1	2.90	3.10	0.114	0.122
C	0.24	0.32	0.009	0.013
D	6.30	6.70	0.248	0.264
E	3.30	3.70	0.130	0.146
e	2.30 BSC		0.090 BSC	
e1	4.60 BSC		0.181 BSC	
H	6.70	7.30	0.264	0.287
L	0.90 MIN		0.036 MIN	
L2	0.06 BSC		0.0024 BSC	
$\alpha$	0°	10°	0°	10°

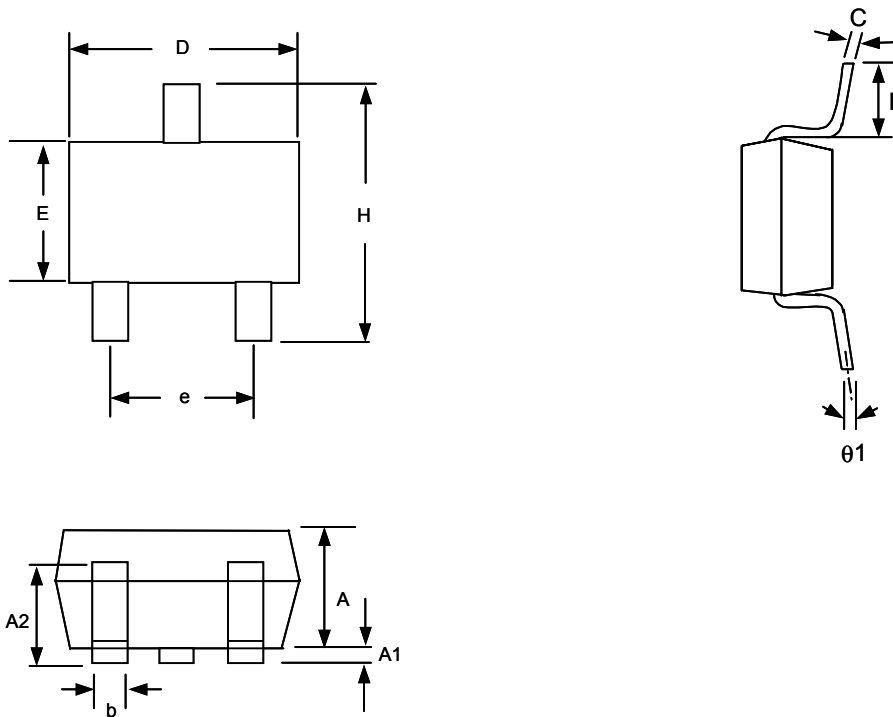


**SOT-23 (T7) Package**

**Note:**

- 1.Package body sizes exclude mold flash protrusions or gate burrs
- 2.Tolerance  $\pm 0.1000$  mm (4mil) unless otherwise specified
- 3.Coplanarity: 0.1000mm
- 4.Dimension L is measured in gage plane


SYMBOLS	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	1.00	1.10	1.30
A1	0.00	-----	0.10
A2	0.70	0.80	0.90
b	0.35	0.40	0.50
C	0.10	0.15	0.25
D	2.70	2.90	3.10
E	1.40	1.60	1.80
e	-----	1.90(TYP)	-----
H	2.60	2.80	3.00
L	0.37	-----	-----
$\theta 1$	1°	5°	9°

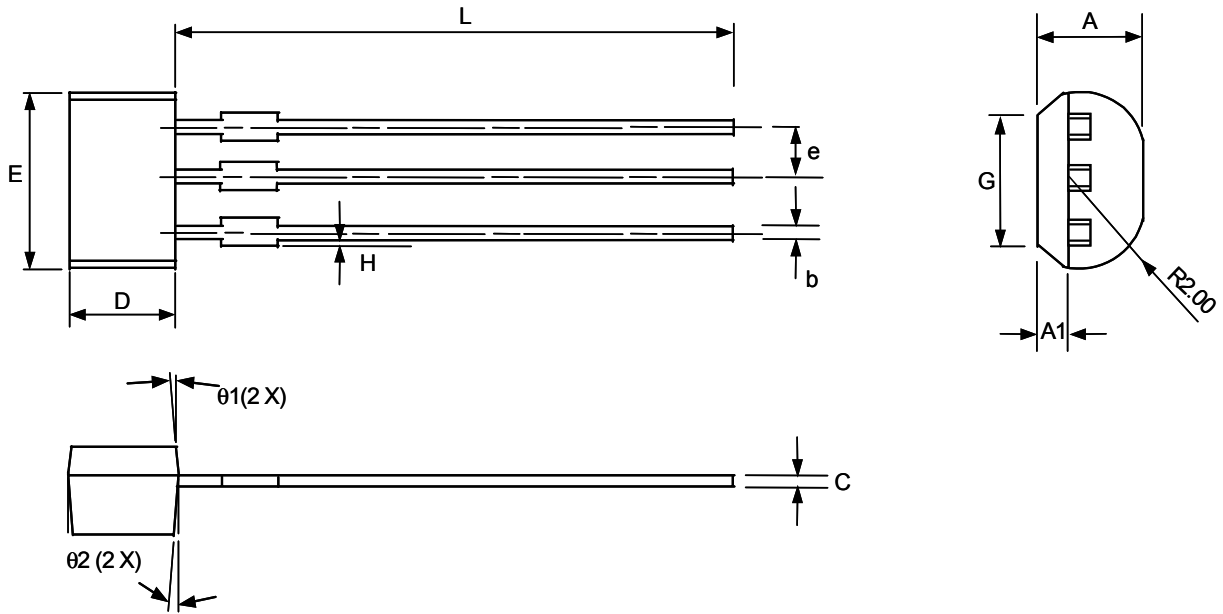


μTO-92 (T8) Package

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	2.40	2.50	2.60	0.094	0.098	0.102
A1	0.70	0.80	0.90	0.028	0.032	0.036
b	0.35	0.45	0.55	0.014	0.018	0.022
C	-----	0.40	-----	-----	0.016	-----
D	2.80	3.00	3.20	0.110	0.118	0.126
E	3.80	4.00	4.20	0.149	0.157	0.165
e	-----	1.27	-----	-----	0.050	-----
F	1.91	2.11	2.31	0.075	0.083	0.091
G	3.35	3.55	3.75	0.132	0.140	0.148
H	0.00	-----	0.15	0.000	-----	0.006
L	13.80	14.00	14.20	0.543	0.551	0.559
θ1	-----	2°	-----	-----	2°	-----
θ2	-----	5°	-----	-----	5°	-----

Package Orientation

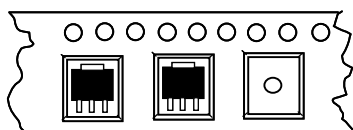

Feed Direction  
SOT 89 - 223 Package Orientation



Feed Direction  
SOT 23 Package Orientation

GMT Inc. does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and GMT Inc. reserves the right at any time without notice to change said circuitry and specifications.