



Micro Commercial Components
 21201 Itasca Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

GBJ20005 THRU GBJ2010

Features


- Rating to 1000V PRV
- Ideal for printed circuit board
- Low forward voltage drop, high current capability.
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product

20 Amp Glass Passivated Bridge Rectifier 50 to 1000 Volts

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

| MCC Catalog Number | Device Marking | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|--------------------|----------------|--|---------------------|-----------------------------|
| GBJ20005 | --- | 50V | 35V | 50V |
| GBJ2001 | --- | 100V | 70V | 100V |
| GBJ2002 | --- | 200V | 140V | 200V |
| GBJ2004 | --- | 400V | 280V | 400V |
| GBJ2006 | --- | 600V | 420V | 600V |
| GBJ2008 | --- | 800V | 560V | 800V |
| GBJ2010 | --- | 1000V | 700V | 1000V |

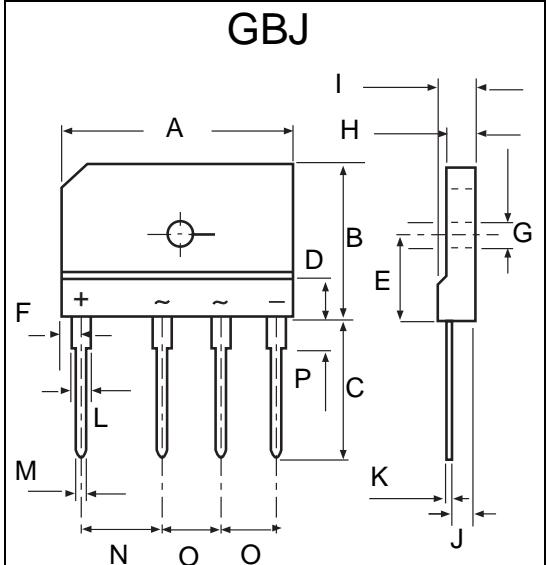

Electrical Characteristics @ 25°C Unless Otherwise Specified

| | | | |
|---|-----------------|------------------------|---|
| Average Forward Current | $I_{F(AV)}$ | 20 A | $T_C = 100^\circ\text{C}$ |
| Peak Forward Surge Current | I_{FSM} | 240A | 8.3ms, half sine |
| Maximum Instantaneous Forward Voltage | V_F | 1.05V | $I_{FM} = 10.0 \text{ A}$ $T_J = 25^\circ\text{C}$ |
| Maximum DC Reverse Current At Rated DC Blocking Voltage | I_R | μA 500uA | $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ |
| Typical thermal resistance | $R_{\theta JC}$ | 0.8°C/W | |
| Typical Junction Capacitance | C_J | 60 pF | Measured at 1.0MHz, $V_R=4.0\text{V}$ |

| DIM | INCHES | | MM | | NOTE |
|-----|--------|-------|-------|-------|------|
| | MIN | MAX | MIN | MAX | |
| A | 1.170 | 1.190 | 29.70 | 30.30 | |
| B | .780 | .800 | 19.70 | 20.30 | |
| C | .670 | .710 | 17.00 | 18.00 | |
| D | .019 | .019 | 4.70 | 4.90 | |
| E | .430 | .440 | 10.80 | 11.20 | |
| F | .090 | .110 | 2.30 | 2.70 | |
| G | .120 | .130 | 3.10 | 3.40 | |
| H | .130 | .150 | 3.40 | 3.80 | |
| I | .170 | .190 | 4.40 | 4.80 | |
| J | .100 | .110 | 2.50 | 2.90 | |
| K | .020 | .030 | 0.60 | 0.80 | |
| L | .080 | .090 | 2.00 | 2.40 | |
| M | .040 | .040 | 0.90 | 1.10 | |
| N | .390 | .400 | 9.80 | 10.20 | |
| O | .290 | .300 | 7.30 | 7.70 | |
| P | .150 | .170 | 3.80 | 4.20 | |

*Pulse Test: Pulse Width 300μsec, Duty Cycle 1%

RATING AND CHARACTERISTIC CURVES

GBJ20005 thru GBJ2010

FIG.1 - FORWARD CURRENT DERATING CURVE

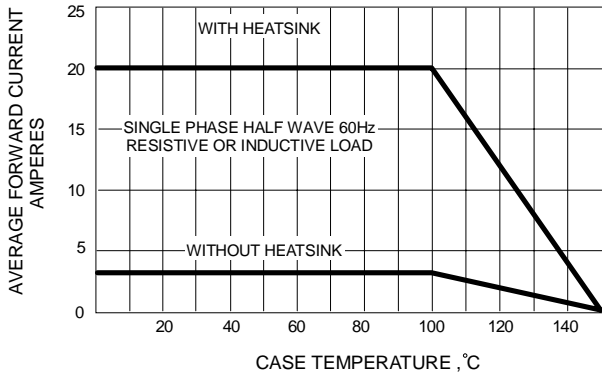


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

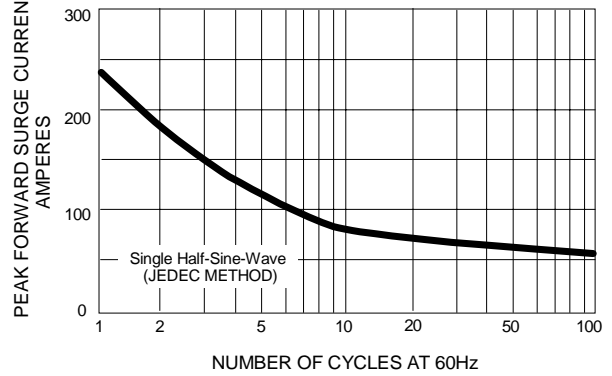


FIG.3 - TYPICAL JUNCTION CAPACITANCE

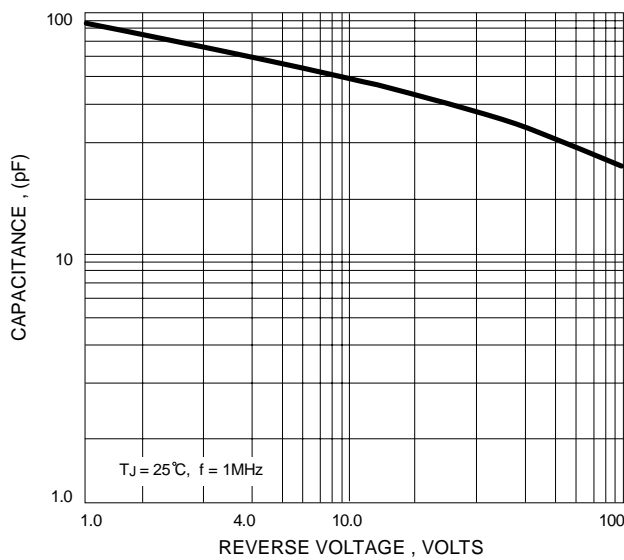


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

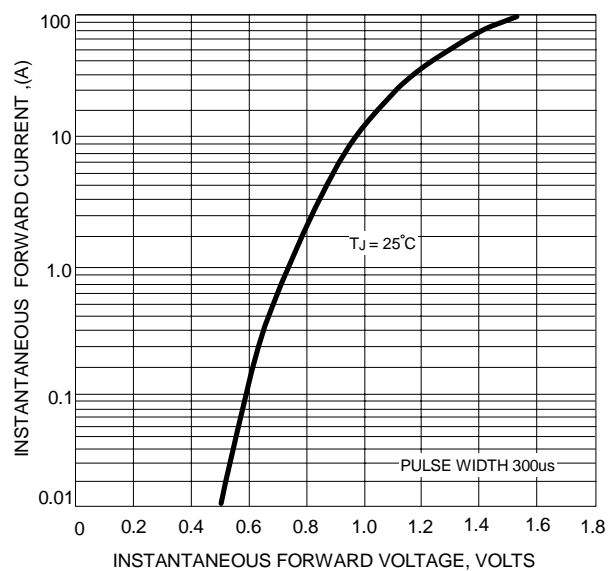


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

