




GBJ6AU thru GBJ6MU

Glass Passivated Single-Phase Bridge Rectifiers
Reverse Voltage 50 to 1000 Volts Forward Current 6.0 Amperes


Features

- ◆ Thin Single In-Line package
- ◆ Ideal for printed circuit boards
- ◆ Glass passivated chip junction
- ◆ High surge current capability
- ◆ High case dielectric strength of 2500 V_{RMS}
- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0

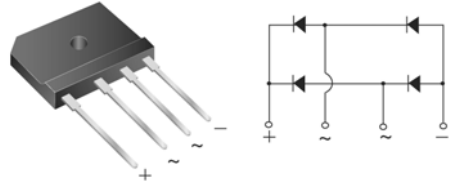

Mechanical Data

- ◆ Case: GBJ(5S)
Epoxy meets UL-94V-0 Flammability rating
- ◆ Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- ◆ High temperature soldering guaranteed:
260°C/10 seconds, 0.375 (9.5mm) lead length,
5lbs.(2.3kg) tension
- ◆ Polarity: As marked on body
- ◆ Mounting Torque: 10 cm-kg (8.8 inches-lbs) max.
- ◆ Recommended Torque: 5.7cm-kg (5 inches-lbs)

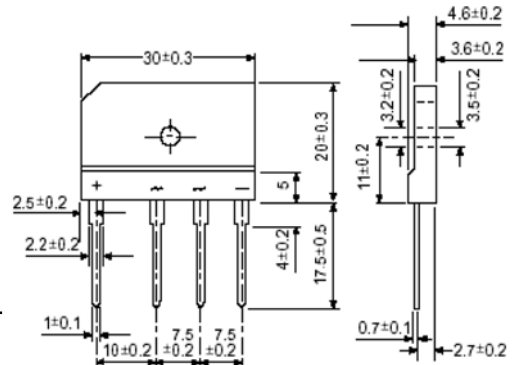

Package outline dimensions in millimeters

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Switching Power Supply, Home Appliances, Office Equipment, Industrial Automation applications

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

| Parameter | Symbols | GBJ6AU | GBJ6BU | GBJ6DU | GBJ6GU | GBJ6JU | GBJ6KU | GBJ6MU | Units |
|--|------------------------------------|--------|--------|--------|--------|--------------------|--------|--------|--------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | Volts |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum average forward rectified output current at $T_C=100^\circ\text{C}$ $T_A=25^\circ\text{C}$ | $I_{F(AV)}$ | | | | | 6.0 ⁽¹⁾ | | | Amps |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | | | | | 180 | | | Amps |
| Rating for fusing (t<8.3ms) | I^2t | | | | | 120 | | | A ² sec |
| Maximum instantaneous forward voltage drop per leg at 3.0A | V_F | | | | | 1.0 | | | Volt |
| Maximum DC reverse current at rated DC blocking voltage per leg $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$ | I_R | | | | | 5 | | | uA |
| Typical thermal resistance per leg | $R_{\theta JA}$ $R_{\theta JC}$ | | | | | 22 ⁽²⁾ | | | °C/W |
| | | | | | | 3.4 ⁽¹⁾ | | | |
| Dielectric strength (Terminals to case, AC 1 minute) | V_{ISO} | | | | | 2500 | | | Volts |
| Operating junction and storage temperature range | T_J, T_{STG} | | | | | -55 to +150 | | | °C |

- Notes:**
1. Unit case mounted on 9.5x9.5x0.15cm thick Al plate heatsink
 2. Units mounted on P.C.B. with 0.5 x 0.5" (13 x 13 mm) copper pads and 0.375" (9.5 mm) lead length
 3. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

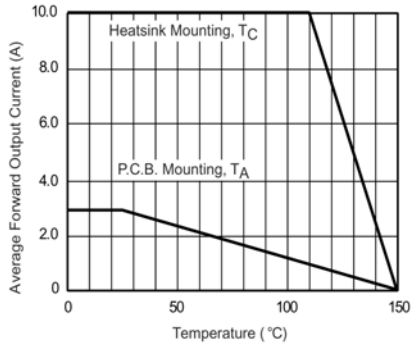


Figure 1. Derating Curve Output Rectified Current

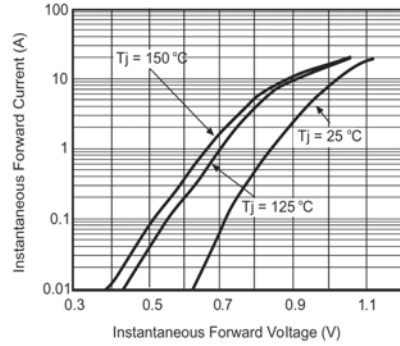


Figure 3. Typical Forward Characteristics Per Leg

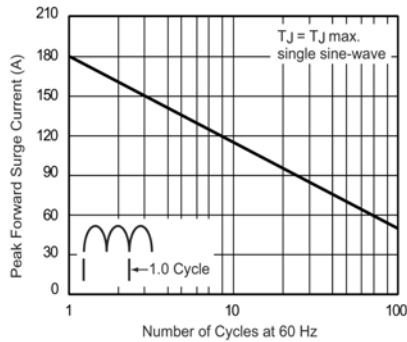


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

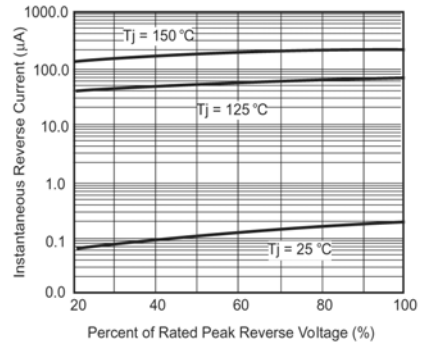


Figure 4. Typical Reverse Characteristics Per Leg

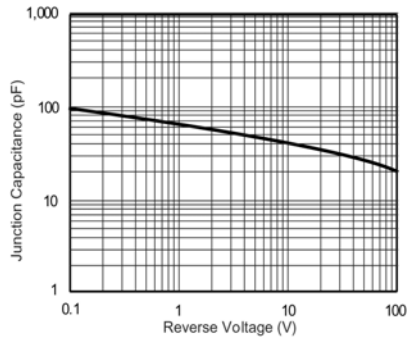


Figure 5. Typical Junction Capacitance Per Leg

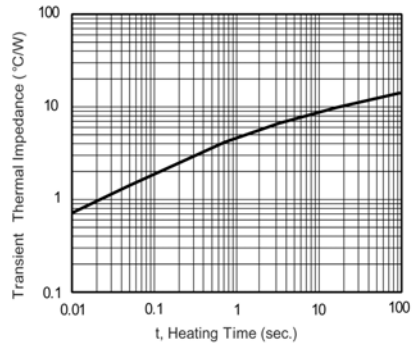


Figure 6. Typical Transient Thermal Impedance