



GBL005~GBL08

IN-LINE GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

Voltage Range 50 to 800 Volts

Current 4.0 Amperes

Rating and Characteristic Curves

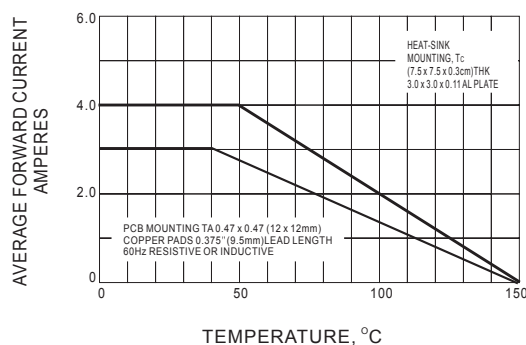


Fig.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

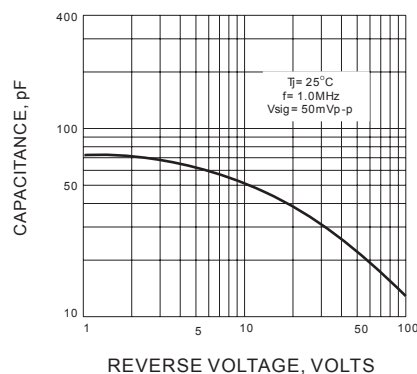


Fig.2 - TYPICAL JUNCTION CAPACITANCE PER ELEMENT

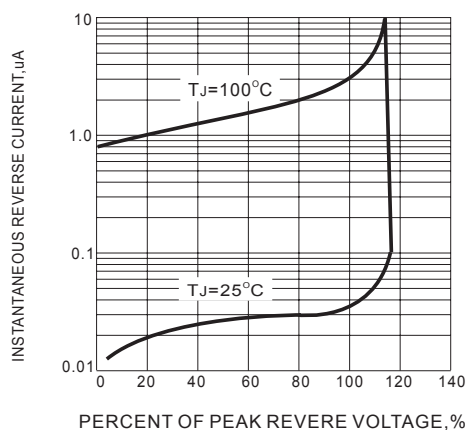


Fig.3 - TYPICAL REVERSE CHARACTERISTICS

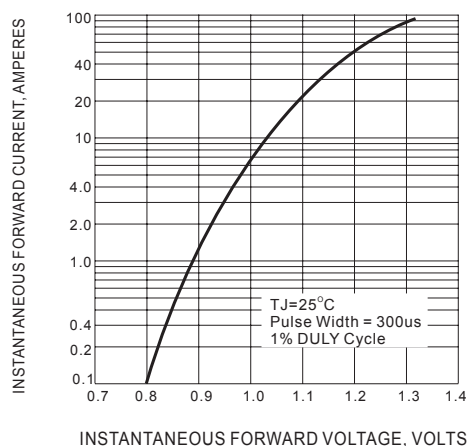


Fig.4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER ELEMENT