

ESD Protection Diodes


GBLC03 ~ GBLC24C

■ Features

- 350 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- Unidirectional & Bidirectional Configurations
- Replacement for MLV (0805)
- Protects One Power or I/O Port
- ESD Protection > 40 kilovolts
- Low Clamping Voltage
- Available in Multiple Voltage Types Ranging from 3V to 24V
- Ultra Low Capacitance: 3pF Typical

■ IEC COMPATIBILITY (EN61000-4)

- 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- 61000-4-4 (EFT): 40A - 5/50ns
- 61000-4-5 (Surge): 12A, 8/20 μs
 - Level 1(Line-Ground) & Level 2(Line-Line)

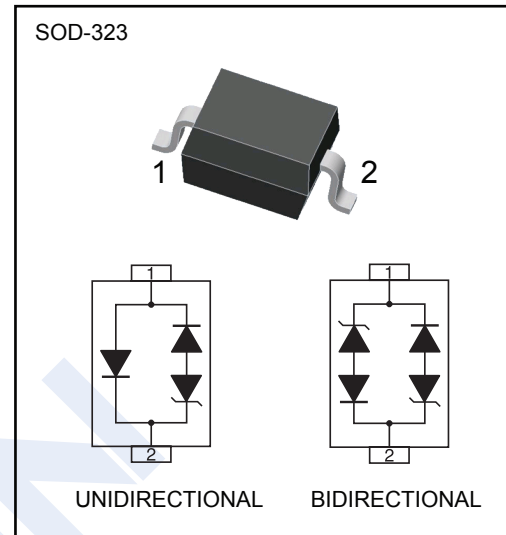

■ Absolute Maximum Ratings @ 25°C Unless Otherwise Specified

Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	PPP	350	W
Operating Temperature	T _J	-55 to +150	°C
Storage Temperature	T _{STG}	-55 to +150	

ESD Protection Diodes

GBLC03 ~ GBLC24C



■ Electrical Characteristics Per Line @ 25°C Unless Otherwise Specified

PART NUMBER (See Note 1 & Note 2)	DEVICE MARKING	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_P = 1A$ V_C VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 8/20 μs $V_C @ I_{PP}$	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA	TYPICAL CAPACITANCE @ 0V, 1 MHz C pF
GBLC03	C	3.3	4.0	7.0	19.0V @ 20.0A	5	3
GBLC03C	CC	3.3	4.0	7.0	19.0V @ 20.0A	5	3
GBLC05	A	5.0	6.0	9.8	18.3V @ 17.0A	5	3
GBLC05C	AC	5.0	6.0	9.8	18.3V @ 17.0A	5	3
GBLC08	B	8.0	8.5	13.4	18.5V @ 17.0A	2	3
GBLC08C	BC	8.0	8.5	13.4	18.5V @ 17.0A	2	3
GBLC12	D	12.0	13.3	19.0	28.6V @ 11.0A	1	3
GBLC12C	DC	12.0	13.3	19.0	28.6V @ 11.0A	1	3
GBLC15	E	15.0	16.7	24.0	31.8V @ 10.0A	1	3
GBLC15C	EC	15.0	16.7	24.0	31.8V @ 10.0A	1	3
GBLC18	H	18.0	20.0	29.0	45.0V @ 8.0A	1	3
GBLC18C	HC	18.0	20.0	29.0	45.0V @ 8.0A	1	3
GBLC24	4	24.0	26.7	43.0	56.0V @ 6.0A	1	3
GBLC24C	4C	24.0	26.7	43.0	56.0V @ 6.0A	1	3

Note 1: Part numbers with an additional "C" suffix are bidirectional devices, i.e., GBLC05C.

Note 2: For Bidirectional Devices Only: Electrical characteristics apply in both directions.

■ Typical Characteristics

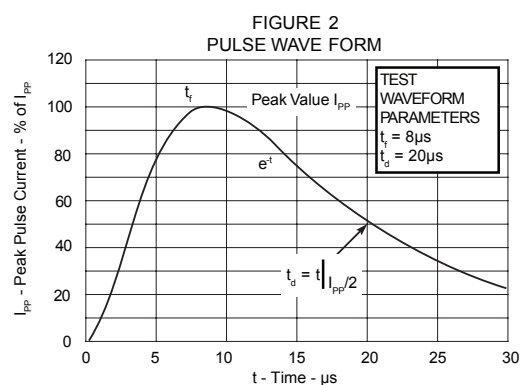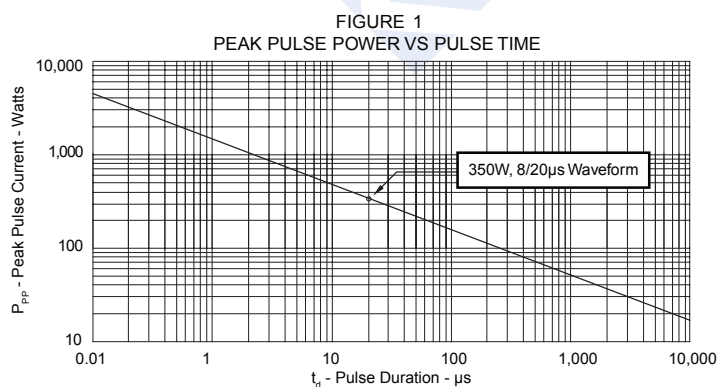


ESD Protection Diodes

GBLC03 ~ GBLC24C


■ Package Outline Dimensions

Plastic surface mounted package; 2 leads

SOD-323

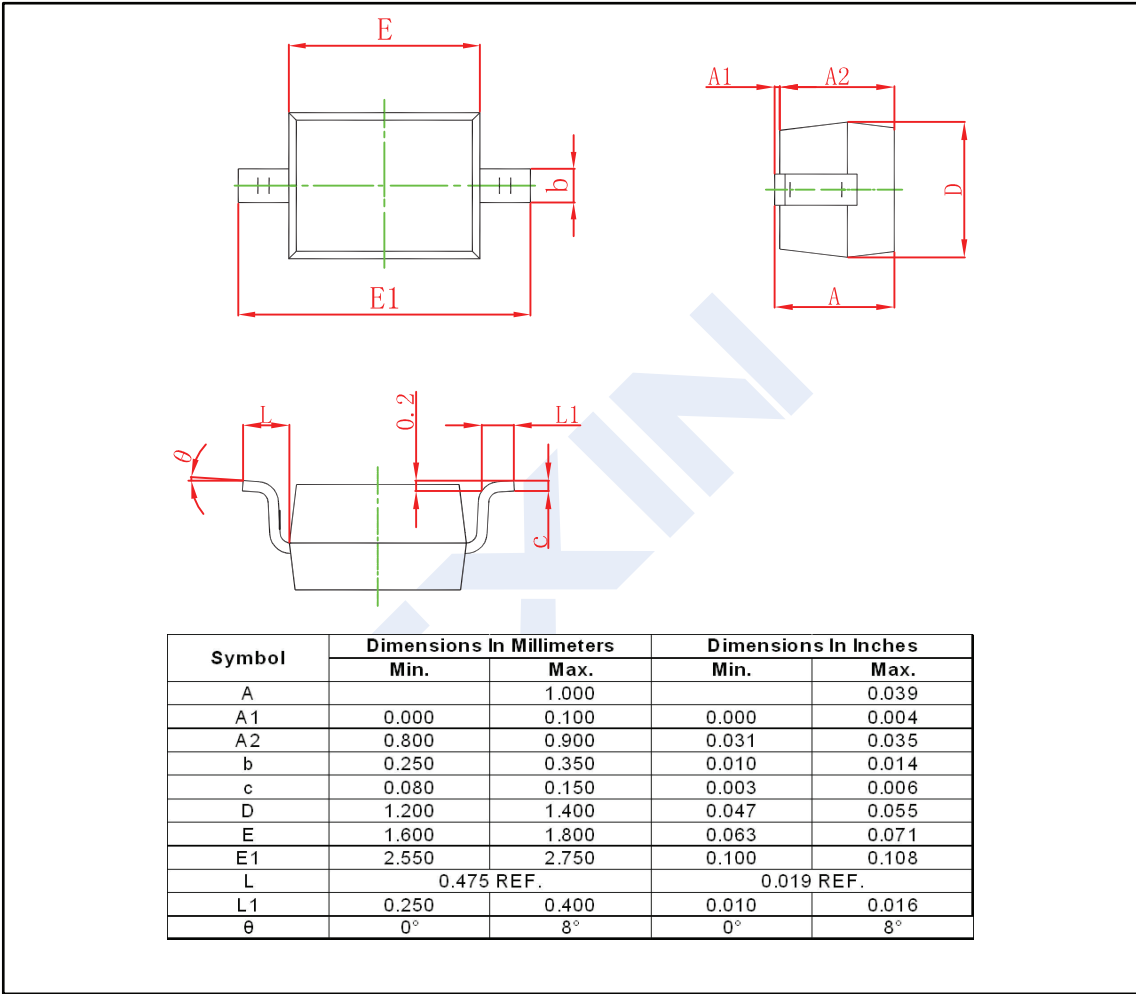

■ The Recommended Mounting Pad Size

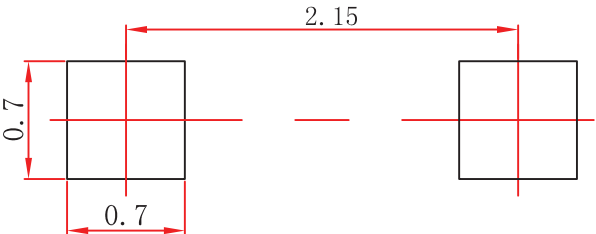

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.