

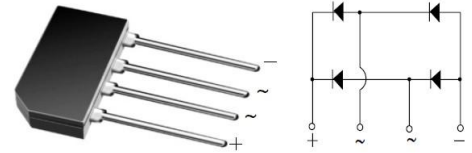


SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIER GBPC005 ~ GBPC110

Single Phase Glass Passivated Bridge Rectifier

Features

- Glass passivated chip junction
- Plastic package has underwriters laboratory
- Flammability classification 90V-0
- High cas dielectric with standing voltage of 1500Vrms
- Typical I_r less than 0.1 uA
- Ideal for printed circuit boards
- High surge current capability
- High temperature soldering guaranteed:
260°C/10 seconds, 0.375"(9.5mm) lead length



Case Type GBL

Mechanical Data

Case:	Molded Plastic body over passivated junctions
Polarity	/
Terminals:	Plated leads solderable per MIL-STD-750, Method 2026
Mounting torque	/
Mounting position:	Any (Note 1)
Weight:	0.1 ounce, 2.8 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	GBPC 1005	GBPC 101	GBPC 102	GBPC 104	GBPC 106	GBPC 108	GBPC 110	Unit	Conditions
VRRM	Max Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
VRMS	Max RMS Voltage	35	70	140	280	420	560	700	V	
VDC	Max DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I(AV)	Max Average Forward Rectified Current	6.0/3.0							A	At TC= 60°C (note2) At TC= 25°C (note 3)
IFSM	Peak Forward Surge Current	175							A	8.3ms single half sine-wave (JEDEC method) TC= 260°C
TJ,TSTG	Operating and Storage Temperature Range	-55 to +150							°C	
I2t	Rating for Fusing	127							A2s	T<8.3mS

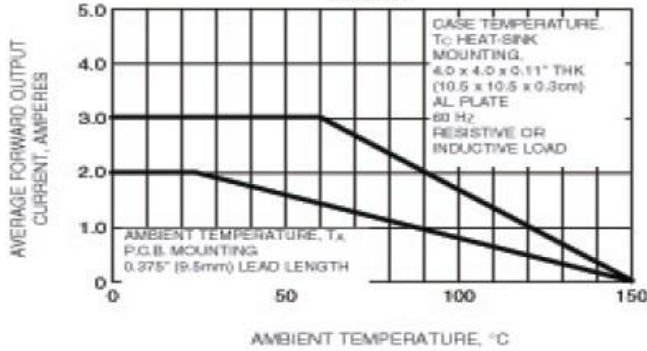
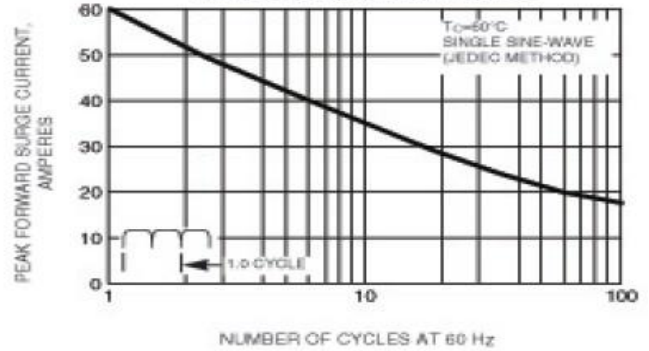
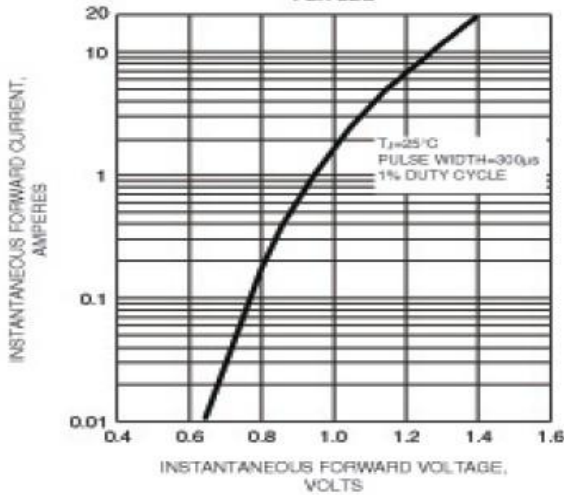
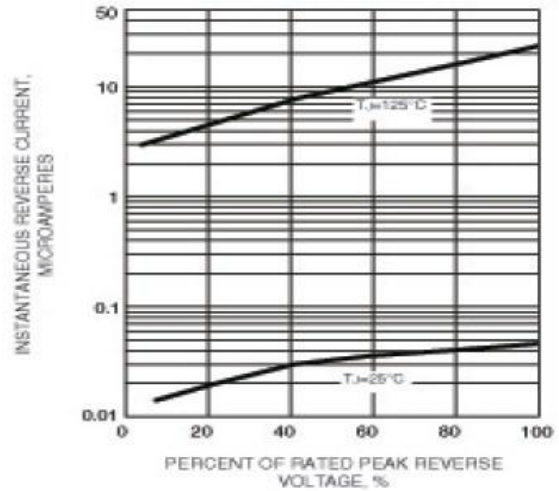
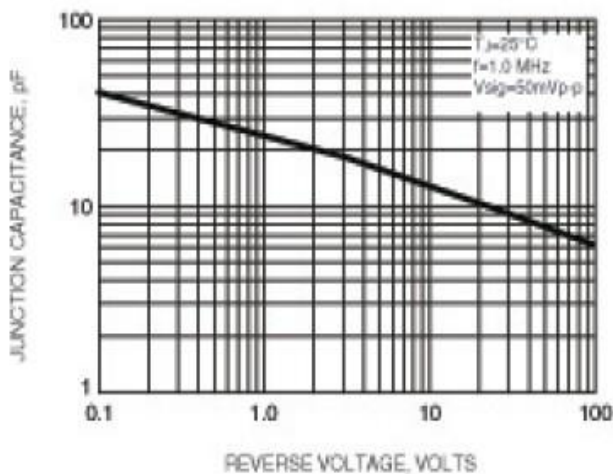
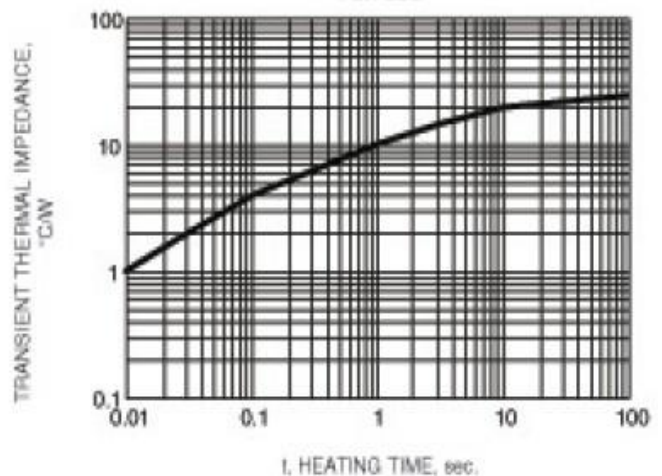
Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

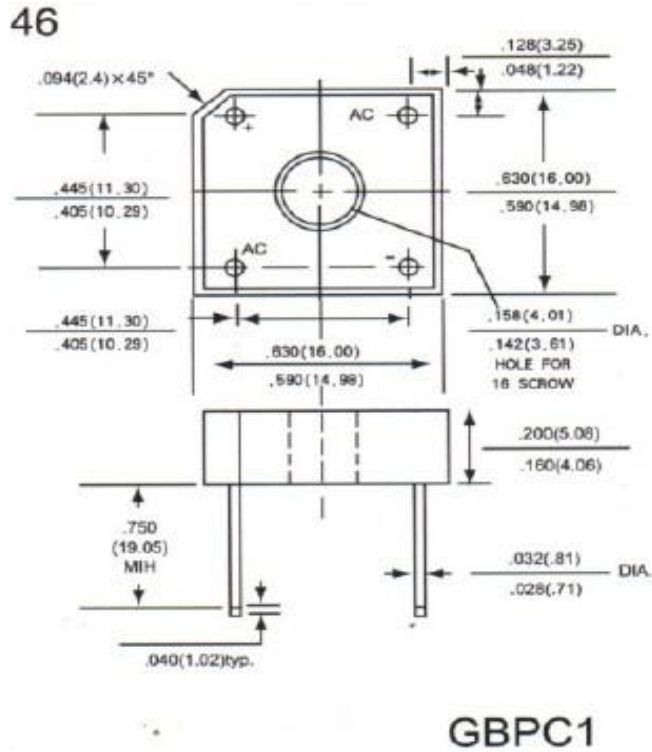
Symbol	Description	GBPC 1005	GBPC 101	GBPC 102	GBPC 104	GBPC 106	GBPC 108	GBPC 110	Unit	Conditions
V _F	Max Instantaneous Forward Voltage	1.0							V	Drop per Bridge element 1.5A
I _R	Max DC Reverse Current at Rated DC Blocking Voltage	5.0							µA	TA=25°C
		500								Tc=125°C
C _J	Typical Junction Capacitance	/			/				pF	/
R _{θ-Ja}	Typical Thermal Resistance	8.0							°C/W	Note 1
R _{θ-Jl}		12								

Note:

1. Bolt down on heatsink with silicon thermal compound between bridge and mounting surface for maximum heat transfer with #6 screw.
2. Unit mounted on 4.0" x 4.0" x 0.11" thick (10.5 x 10.5 x 0.3cm) Al Plate
3. Unit mounted on P.C.B at 0.375" (9.5mm) lead with 0.5"x 0.5"(12x12mm) copper pads

GBPC1005 ~ GBPC110 RATINGS AND CHARACTERISTIC CURVES GBL05 THRU GBL10

FIG. 1 - DERATING CURVE OUTPUT RECTIFIED CURRENT

FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

FIG. 3 - TYPICAL FORWARD CHARACTERISTICS PER LEG

FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG

FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG


GBPC1005 ~ GBPC110
Dimensions in inches (mm)

Contact us:
US HEADQUARTERS
MEI SEMI INC.
2902 Corvin Drive, Santa Clara, CA95051, USA

Tel: 1-408-733-0808 Fax: 1-408-733-2828