


10A GLASS PASSIVATED BRIDGE RECTIFIER

FEATURES

- * Glass Passivated Die Construction
- * Low Forward Voltage Drop
- * High Current Capability
- * High Reliability
- * High Surge Current Capability

MECHANICAL DATA

- * Case: Molded Plastic
- * Epoxy: UL94V-O rate flame retardant
- * Terminals : Plated Leads Solderable
Per MIL-STD-202 Method 208
- * Polarity : As Marking on Body
- * Mounting Position: Any
- * Weight : 4.0 gram (approx.)
- * Marking:Type Number

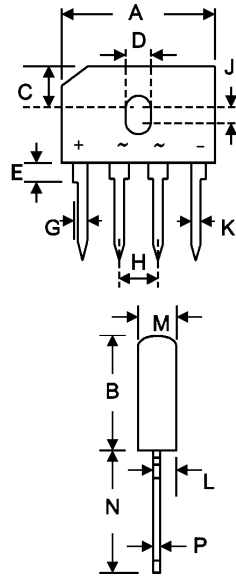

GBU		
Dim	Min	Max
A	21.80	22.30
B	18.30	18.80
C	7.40	7.90
D	3.50	4.10
E	1.52	2.03
G	2.16	2.54
H	4.83	5.33
J	1.65	2.16
K	1.65	2.03
L	0.76	1.02
M	3.30	3.56
N	17.50	18.00
P	0.46	0.56
Unit :mm		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- * Rating at 25 °C ambient temperature unless otherwise specified
- * Single phase, half wave, 60Hz, resistive or inductive load.
- * For capacitive load derate current by 20 %

Characteristic	Symbol	GBU10A	GBU10B	GBU10D	GBU10G	GBU10J	GBU10K	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	V
Average Rectifier Forward Current @ $T_C=100$	$I_{O(AV)}$	10						A
Non-Repetitive Peak Surge Current 8.3 ms Single half sine-wave superimposed on rated load	I_{FSM}	220						A
Forward Voltage (per element) ($I_F=4.0$ Amp)	V_{FM}	1.0						V
Peak Reverse Current (Rated DC Voltage, $T_C = 25$) (Rated DC Voltage, $T_C = 125$)	I_R	5.0 500						uA
$I^2 t$ Rating for Fusing($t<8.35MS$) (note 2)	$I^2 t$	200						A^2s
Typical Thermal Resistance (per leg)(note 1)	$R_{\theta jc}$	2.2						k/W
Typical Junction Capacitance per element (Note 3)	C_J	60						pF
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +150						

- Note: 1.United mounted on 100 × 100 × 1.6 mm copper plate heatsink.
2.Non-repetitive, for $t>1.0ms$ and $<8.3 ms$
3 Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

GBU10A thru GBU10K

FIG-1 FORWARD CURRENT DERATING CURVE

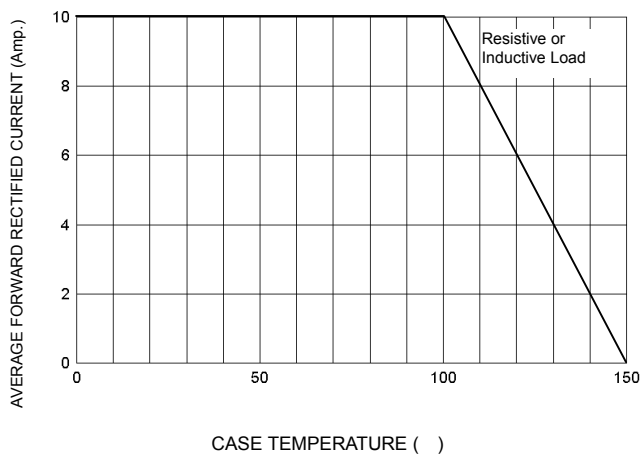


FIG-2 TYPICAL FORWARD CHARACTERISTICS

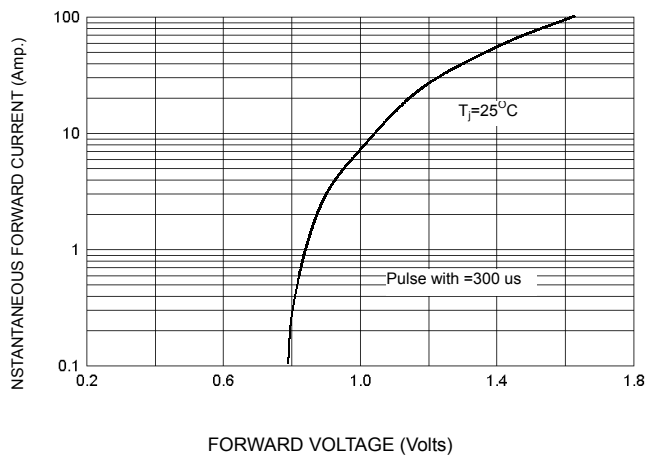


FIG-3 PEAK FORWARD SURGE CURRENT

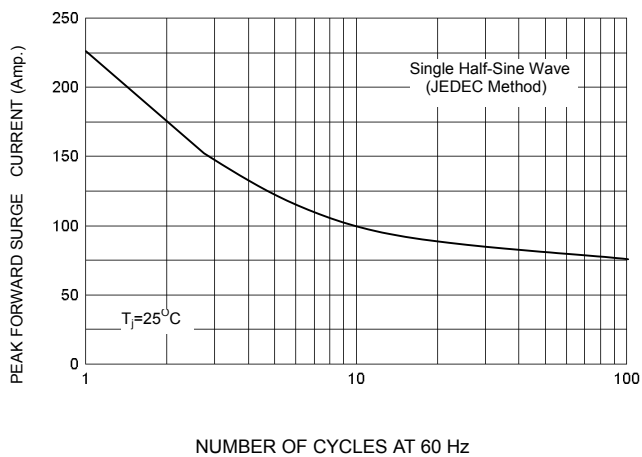


FIG-4 TYPICAL JUNCTION CAPACITANCE

