


GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE - **600** Volts
FORWARD CURRENT - **20** Amperes

FEATURES

- Surge overload rating -260 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has U/L flammability classification 94V-0
- Mounting position: Any

GBU

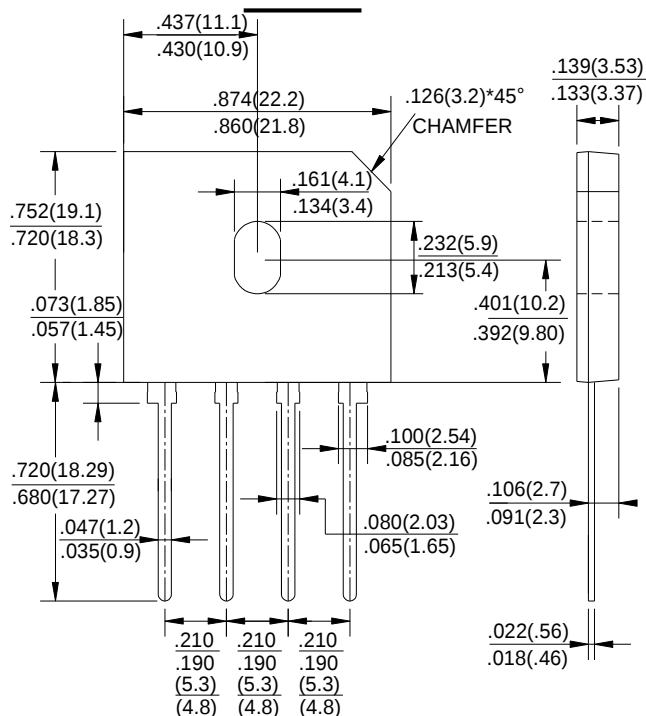

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	GBU2006L	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	600	V
Maximum RMS Voltage	V _{RMS}	420	V
Maximum DC Blocking Voltage	V _{DC}	600	V
Maximum Average Forward (with heatsink Note1) Rectified Current @ T _c =100°C (without heatsink)	I _(AV)	20.0 3.6	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}	260	A
I ² t Rating for Fusing (t<8.3ms)	I ² t	280	A ² s
Typical Junction Capacitance Per Element (Note2)	C _J	70	pF
Maximum Forward Voltage at 10.0A DC	V _F	127	V
Maximum DC Reverse Current @ T _J =25°C at Rated DC Blocking Voltage @ T _J =125°C	I _R	10.0 500	μA
Typical Thermal Resistance	R _{θJC}	2.2	°C/W
Operating Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

NOTES: 1.Device mounted on 100mm*100mm*1.6mm cu plate heatsink.

2.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3.The typical data above is for reference only(典型值仅供参考).



FIG.1-MAXIMUM FORWARD SURGE CURRENT

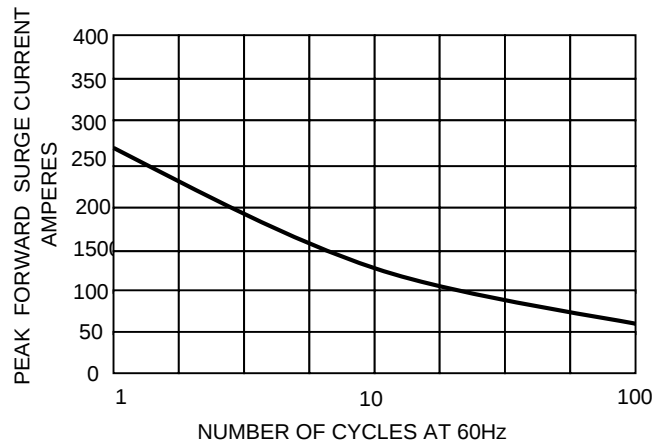


FIG.2- DERATING CURVE
OUTPUT RECTIFIED CURRENT

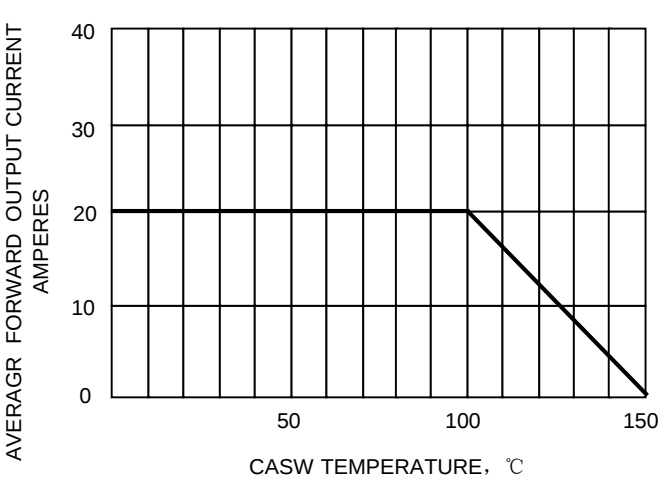


FIG.3-TYPICAL FORWARD CHARACTERISTICS

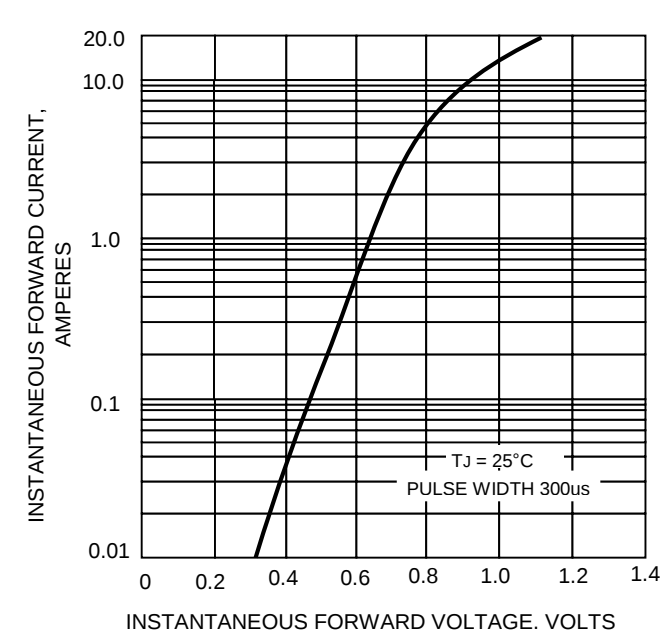


FIG.4-TYPICAL REVERSE
CHARACTERISTICS


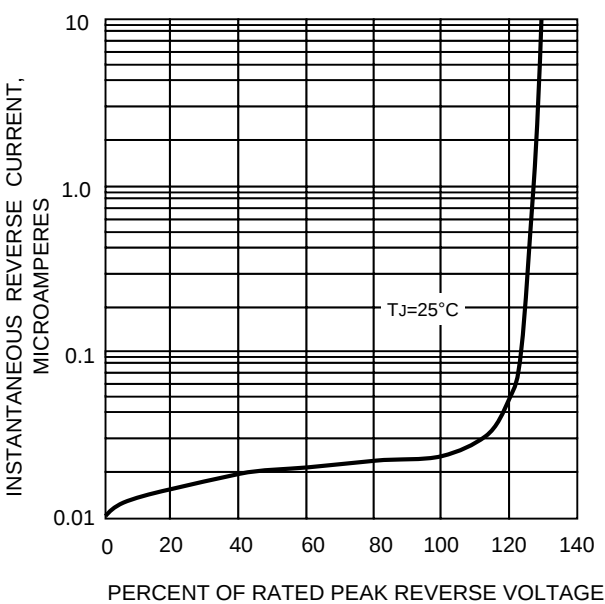


FIG.5-TYPICAL JUNCTION CAPACITANCE

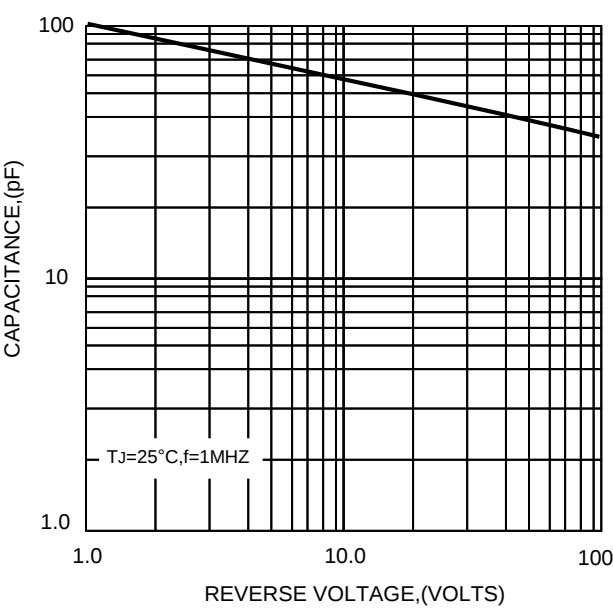

The curve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!