



Features

- * Plastic package has underwriters laboratory flammability classification 94V-0
- * Ideal for printed circuit boards
- * Glass passivated chip junction
- * High Surge Current Capability
- * High temperature soldering guaranteed 270°C/10 seconds, 0.375(9.5mm) lead length



RoHS
COMPLIANT

Package Outline Dimensions in inches (millimeters)

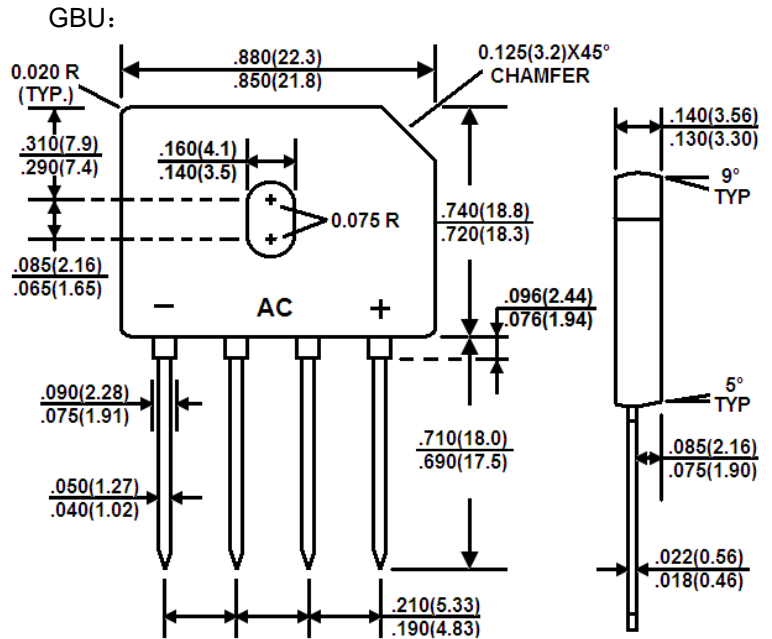

Mechanical Data

- * Case: Molded plastic body over passivated junctions

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Type Number	Symbols	GBU 8A	GBU 8B	GBU 8D	GBU 8G	GBU 8J	GBU 8K	GBU 8M	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum D.C Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	8.0							A
Peak Forward Surge Current single half sine-wave superimposed on rated load	I_{FSM}	200							A
Maximum instantaneous forward voltage(Note1) $I_F=4.0A$ $I_F=8.0A$	V_F	1.0 1.1							V
Maximum Reverse Current @ $T_J=25^\circ C$ at Rated D.C Blocking Voltage @ $T_J=125^\circ C$	I_R	5.0 500							μA
Typical junction capacitance per leg (Note2)	C_J	211				94			pF
Rating for fusing ($t < 8.3ms$)	I^2t	166							A^2sec
Typical thermal resistance	$R_{\theta JC}$ $R_{\theta JA}$	2.0 21							$^\circ C/W$
Operating and Storage Temperature Range	T_J / T_{STG}	-55 to +150							$^\circ C$

Note: 1. Pulse test with PW=300 μs , 1% duty cycle 2. Measured at 1MHz and applied Reverse bias of 4.0V DC

Ratings and Characteristic Curves

FIG. 1- MAXIMUM DERATING CURVE FOR OUTPUT CURRENT

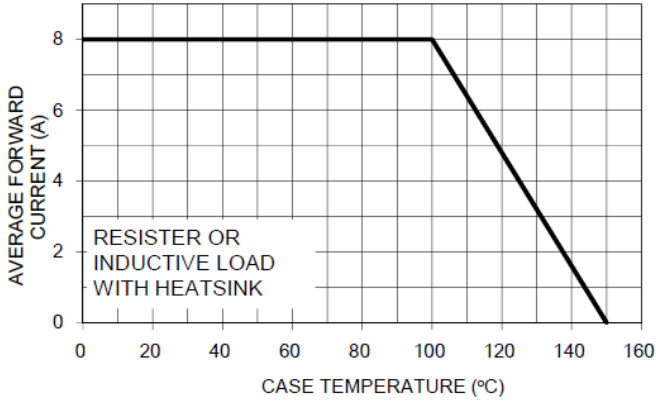


FIG. 2- MAXIMUM FORWARD SURGE CURRENT PER LEG

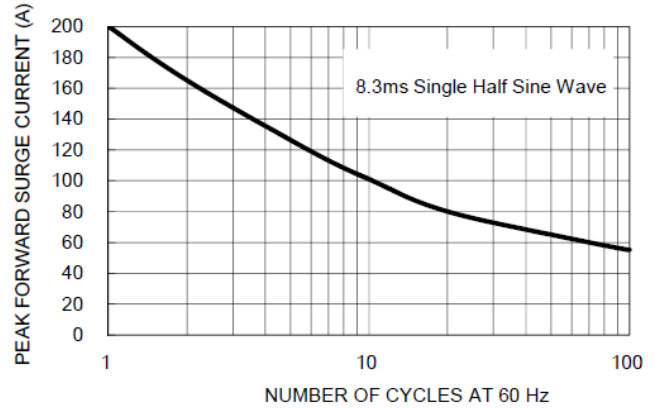


FIG. 3- TYPICAL REVERSE CHARACTERISTICS PER LEG

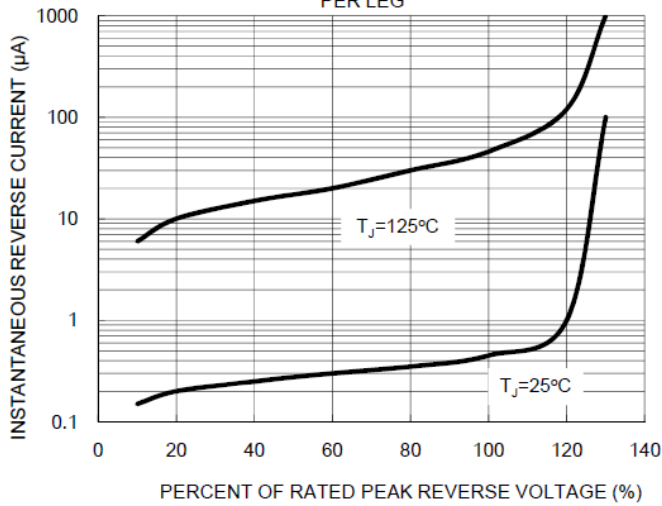


FIG. 4- TYPICAL FORWARD CHARACTERISTICS PER LEG


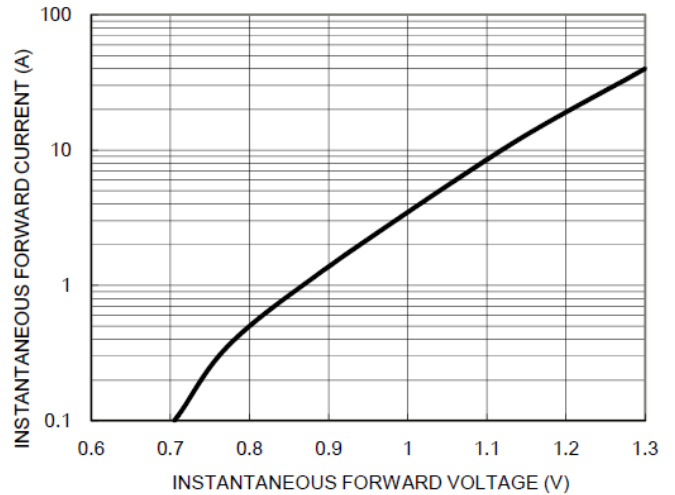


FIG. 5- TYPICAL JUNCTION CAPACITANCE PER LEG



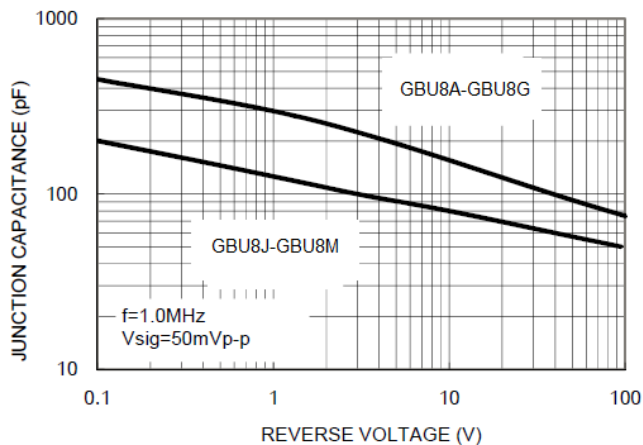

GBU8A THRU GBU8M

Glass Passivated Single Phase Bridge Rectifiers

Ordering Information

Part No.	Package	Packing
GBU8A~ GBU8M	GBU	20pcs/Tube