



## GC-485 SERIES

### Digital I/O Gage Heads

#### SPECIFICATIONS

- **RS-485 output**
- **$\pm 0.1\%$  of FR maximum ( $\pm 0.05\%$  typical) linearity**
- **32 devices communicating over 2 wires**
- **MIN, MAX and TIR readings**
- **Velocity output**
- **Internal tare (zero) function**
- **Stroke ranges from  $\pm 0.125$  to  $\pm 1$  inch**
- **IEC IP68 rating to 1,000 PSI [70 bars]**

The GC-485 Series heavy-duty, spring loaded gage heads are self-contained, ultra precision, digital I/O devices for high performance measurements in environments containing moisture, dirt, and fluid contaminants. The GC-485 eliminates the need for expensive and error-prone analog to digital conversion by internally converting the analog LVDT signals into engineering units (imperial or metric). The result is a fully calibrated and traceable measurement device, ready for installation, and 100% field interchangeable.

Operating on 8.5 to 30VDC supply, the GC-485 provides an addressable RS-485 loop output (MODBus RTU and ASCII protocols) running at 119kBd baud rate and capable of handling up to 32 devices communicating over two wires. MIN, MAX and TIR readings are sampled and stored internally at a maximum update rate of 600 samples per second, and are provided to the host on demand. A velocity output (inch or mm per second) is also available, while an internal tare (zero) function affords maximum measurement range flexibility.

These robust gage heads feature a removable black-chromed, hardened tool steel tip threaded (4-48UNF-2A) to the working end. Internal construction prevents the core and shaft from rotating as they move longitudinally. The welded electrical connector allows replacement of a damaged cable without sacrificing the sensor. The external  $\frac{1}{2}$ -20 threads and the two supplied locknuts facilitate installation and adjustment.

Like in most of our LVDTs, the GC-485 windings are vacuum impregnated with a specially formulated, high temperature, flexible resin, and the coil assembly is potted inside its housing with a two-component epoxy. This provides excellent protection against hostile environments such as high vibration and shock.

The ruggedness, long life cycle, and very high reliability of the GC-485 provide a low cost of ownership over the life of the equipment onto which they are installed. The one-piece front end (barrel), machined from solid stainless steel bar, coupled with a bronze bushing, has far greater resistance to side loads compared to other designs; it reduces the risk of probe damage during installation or maintenance. The GC-485 design also require fewer parts and weld joints, thereby increasing overall structural integrity and reliability.

#### FEATURES

- All-welded stainless steel construction
- MS type connector (MIL-C-5015)
- Hardened tool steel contact tip
- High side load resistance
- Programmable filtering
- Calibration certificate supplied with each unit
- Air extend/spring retract available (*consult factory*)

#### APPLICATIONS

- Roller Gap Control
- In-process Wet Grinding
- High Density Gaging
- Hand Held Gages
- X-Y Positional Feedback
- Remote Monitoring
- Applications where wiring must be minimized

## PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS				
Parameter	GC-485 125	GC-485 250	GC-485 500	GC-485 1000
Stroke/gaging range	±0.125 [ $\pm 3.17$ ]	±0.25 [ $\pm 6.85$ ]	±0.5 [ $\pm 12.7$ ]	±1.0 [ $\pm 25.4$ ]
Input voltage	8.5 to 30 VDC			
Input current	50mA			
Output	RS-485 (MODBus RTU and ASCII protocols)			
Baud rate	119 kBd			
Output units	Imperial or Metric			
Resolution	15-bit, minimum			
Non-linearity	±0.1% of FR, maximum (±0.05% of FR, typical)			
Repeatability	25 $\mu$ -inch [0.6 $\mu$ m]			
Stability	0.1% of FS			
Temperature coefficient of scale factor	0.025%/°F [0.045%/°C], maximum			
Frequency response (dynamic)	15Hz, maximum			

ENVIRONMENTAL SPECIFICATIONS & MATERIALS	
Operating temperature	-13°F to +185°F [-25°C to +85°C]
Survival temperature	-67°F to +203°F [-55°C to +95°C]
Shock survival	250 g (11ms half-sine)
Vibration tolerance	10 g up to 2kHz
Housing material	AISI 400 Series stainless steel
Electrical connector	6-pin MS type connector (MIL-C-5015)
IEC 60529 rating	IP68 to 1,000 PSI [70 bars] with use of proper mating connector plug

**Notes:**

All values are nominal unless otherwise noted

Dimensions are in inch [mm] unless otherwise noted


FR: Full Range is the stroke range, end to end; FR=2xS for  $\pm S$  stroke range

## WIRING INFORMATION


Function	Connector pin
Power IN	E
Common	D
A (-Data)	A
B (+Data)	B

**MECHANICAL SPECIFICATIONS**

Parameter	GC-485 125	GC-485 250	GC-485 500	GC-485 1000
Stroke/gaging range	±0.125 [±3.17]	±0.25 [±6.85]	±0.5 [±12.7]	±1.0 [±25.4]
Pre-travel	0.28 [7.1]	0.18 [4.6]	0.20 [5.1]	0.10 [2.5]
Over-travel	0.29 [7.4]	0.03 [0.8]	0.35 [8.9]	0.10 [2.5]
Main body length "A"	4.90 [124.5]	5.76 [146.3]	7.46 [189.5]	9.42 [239.2]
Overall body length "B"	6.27 [159.3]	7.13 [181.1]	10.45 [265.4]	12.41 [315.2]
Plunger length "C" (fully extended)	7.30 [185.4]	8.16 [207.3]	12.93 [328.4]	14.87 [377.7]
Spring force	Typically 9oz [255 grams] at fully compressed electrical stroke			

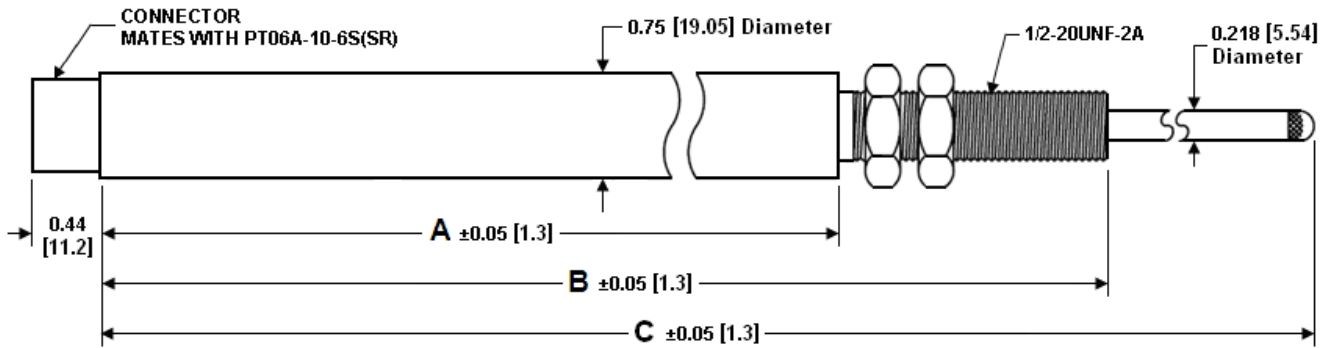

**REPLACEMENT/OPTIONAL CONTACT TIPS**

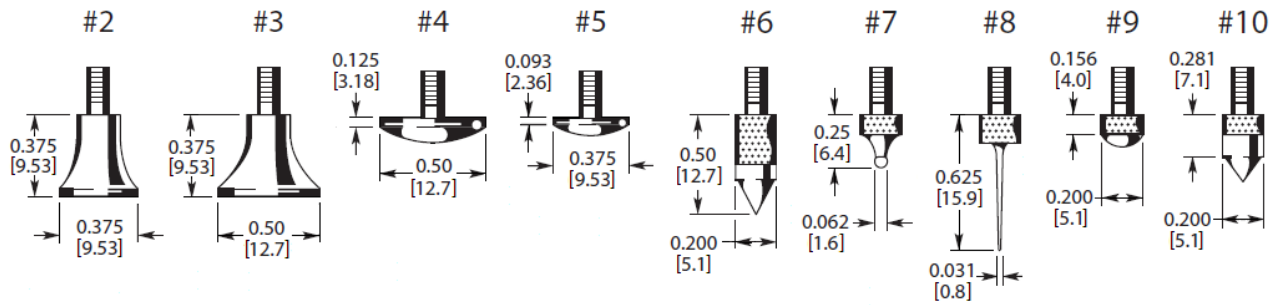

*Dimensions are in inch [mm]*

**ORDERING INFORMATION**

Description	Model	Part Number
±0.125 inch gage head <i>(Manual and software available on our web site)</i>	GC-485 125	02351012-000
±0.25 inch gage head <i>(Manual and software available on our web site)</i>	GC-485 250	02351013-000
±0.5 inch gage head <i>(Manual and software available on our web site)</i>	GC-485 500	02351014-000
±1.0 inch gage head <i>(Manual and software available on our web site)</i>	GC-485 1000	02351015-000
<b>OPTIONS</b>		
Air extend/spring retract gage head <i>(Consult factory)</i>	All GC Series	XXXXXXXX-150
<b>ACCESSORIES</b>		
DC power supply (15VDC)	PSD 40-15	02291339-000
Mating connector kit	PT06A-10-6S(SR)	62101011-000
Replacement contact tips	Contact Tip 2	67010005-000
	Contact Tip 3	67010006-000
	Contact Tip 4	67010002-000
	Contact Tip 5	67010007-000
	Contact Tip 6	67010008-000
	Contact Tip 7	67010009-000
	Contact Tip 8	67010010-000
	Contact Tip 9	67010001-000
	Contact Tip 10	67010011-000

**NORTH AMERICA**

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1000 Lucas Way  
Hampton, VA 23666  
United States  
Phone: +1-800-745-8008  
Fax: +1-757-766-4297  
Email: sales@meas-spec.com

**EUROPE**

MEAS Deutschland GmbH (Europe)  
a TE Connectivity Company  
Hauert 13  
D-44227 Dortmund  
Germany  
Phone: +49-(0)231-9740-0  
Fax: +49-(0)231-9740-20  
Email: info.de@meas-spec.com

**ASIA**

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Phone: +86-755-33305088  
Fax: +86-755-33305099  
Email: info.cn@meas-spec.com

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.