



# Gemini Tech CO., LTD.

CONTACT ADDRESS : RM,1521 Investel, 1123-2 Sanbon-dong,  
Gunpo-city, Kyeongki-do, 435-040 Korea  
Tel: +82-31-455-3200  
Fax: +82-31-343-2102  
E-mail: [sales@findlcd.com](mailto:sales@findlcd.com)

PART NO. : GCB1602B-SFYLYHTC-06

FOR MESSRS. : \_\_\_\_\_

## CONTENTS

<i>NO.</i>	<i>ITEM</i>	<i>PAGE</i>
1.	COVER	1
2.	RECORD OF REVISION	2
3.	GENERAL SPECIFICATION	3
4.	MECHANICAL DATA	3
5.	ABSOLUTE MAXIMUM RATINGS	4
6.	ELECTRICAL CHARACTERISTICS	5
7.	OPTICAL CHARACTERISTICS	5
8.	OUTLINE DIMENSION	6~7
9.	BLOCK DIAGRAM	7
10.	INTERFACE TIMING CHART	8~9
11.	INSTRUCTION CODE	10~11
12.	CHARACTER GENERATOR ROM	12

## RECORD OF REVISION

DATE	PAGE	SUMMARY

### ***3. General specifications***

#### ***3.1 General specifications***

*PLEASE REFER TO:*

*“CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS (MS-10-10000)”.*

#### ***3.2 Quality Assurance and Warranty***

*PLEASE REFER TO:*

*“QUALITY ASSURANCE MANUL (MS-10-10001)”.*

#### ***3.3 This individual specification is prior to general specifications***

### ***4. Mechanical data***

- Display format: 16 characters x 2 lines
- LCD type: STN Positive Yellow-Green
- Backlight color : Yellow-Green
- Viewing angle: 6:00
- Data transfer: 8Bit Parallel
- LCD controller:KS0066 + KS0065
- Module size:122x 44 mm
- View area: 99x24mm
- Dot size: 0.92 x 1.1 mm
- Dot pitch: 0.98x1.16 mm
- Driving method: 1/16 duty, 1/4 bias
- RoHS regulation: To our best knowledge, this product satisfies material requirement of RoHS regulation. Our company is doing the best efforts to Obtain the equivalent certificate from our suppliers.

## 5. Absolute maximum ratings

### 5.1 Electrical absolute maximum ratings

<i>I T E M</i>	<i>SYMBOL</i>	<i>MIN.</i>	<i>MAX.</i>	<i>UNIT</i>	<i>COMMENT</i>
INPUT VOLTAGE	V <sub>i</sub>	4.5	5.5	V	-----
STATIC ELECTRICITY	-----	-----	-----	V	
POWER SUPPLY FOR	V <sub>s</sub>	4.1	4.3	V <sub>rms</sub>	-----
BACKLIGHT	f <sub>FL</sub>	-----	-----	KHz	-----

### 5.2 Environmental absolute maximum ratings

<i>I T E M</i>	<i>OPERATING</i>		<i>STORAGE</i>		<i>COMMENT</i>
	<i>MIN.</i>	<i>MAX.</i>	<i>MIN.</i>	<i>MAX.</i>	
AMBIENT TEMPERATURE	-20°C	70°C	-30°C	80°C	-----
HUMIDITY	NOTE (2)		NOTE (2)		NO CONDENSATION
VIBRATION NOTE (3)	-----	0.5G	-----	2G	10~300Hz XYZ DIRECTIONS 1 Hr EACH
SHOCK NOTE (3)	-----	3G	-----	5G	10 msec XYZ DIRECTIONS 1 TIME EACH
CORROSIVE GAS	NOT ACCEPTABLE		NOT ACCEPTABLE		-----

NOTE (2): T<sub>a</sub> ≤ 70°C: 75% RH MAX.

T<sub>a</sub> > 70°C: ABSOLUTE HUMIDITY MUST BE LOWER THAN THE HUMIDITY OF 75% RH AT 70°C.

NOTE (3): 1G = 9.8 m/s<sup>2</sup>

## 6. Electrical characteristics

Ta = 25°C VDD = 5.0 ± 0.1 V

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power supply voltage for circuit	VDD-VSS	-----	4.5	5.0	5.5	V
Power supply voltage for LCD drive	VDD-V0	-----	-----	4.3	-----	V
Data input voltage	V <sub>IH</sub>	H LEVEL	0.7V <sub>DD</sub>	-----	V <sub>DD</sub> +0.3	V
	V <sub>IL</sub>	L LEVEL	-0.3	-----	0.2V <sub>DD</sub>	V
LCD display duty ratio	DUTY	-----	-----	1/16	-----	-----
LED BACKLIGHT	I <sub>fp</sub>	I mse0 plus 10% Dutg cycle		---		mA
		Operating voltage	-----	4.1	-----	V
		Forward current		210		mA
LED Lifetime	-----	V <sub>FL</sub> =4.1V <sub>rms</sub> f <sub>FL</sub> = KHZ	-----	100,000	-----	Hr

NOTE: LED backlight: Due to the LED backlight working current is XXX Max, and LED chips V<sub>op</sub> may be different, Gemini will adjust the backlight resistor according to the LED chips V<sub>op</sub>, to meet the brightness maximum.

## 7. Optical characteristics

Ta = 25°C

V<sub>LCD</sub> = 4.3V

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Viewing angle	Φ2-Φ1	K ≥ 2.0	-35	----	20	deg.	1
Contrast ratio	K	Φ = 10 <sup>0</sup> θ = 0 <sup>0</sup>	4.0	----	-----	-----	1
Response time (at 25°C)	tr (rise)	Φ = 10 <sup>0</sup> θ = 0 <sup>0</sup>	-----	----	250	ms	1
	tf (fall)	Φ = 10 <sup>0</sup> θ = 0 <sup>0</sup>	-----	----	250	ms	1
The brightness of backlighting source	B	V <sub>FL</sub> =4.1V <sub>rms</sub> f <sub>FL</sub> = KHZ	-----	200	-----	cd/m <sup>2</sup>	2

NOTE (1): SEE CUSTOMER ACCEPTANCE STANDARD SPECIFICATION FOR DEFINITION OF OPTICAL CHARACTERISTICS

NOTE (2): UNDER NORMAL TEMPERATURE AND HUMIDITY IN A DARK ROOM





## 8.1 Interface

### Pin Assignment

PIN NO.	Symbol	Leve	Function
1	Vss	0V	Ground
2	Vdd	5.0V	Power Supply for LCM(+)
3	V0	----	Contrast Adjust
4	RS	H/L	Register select signal
5	RW	H/L	Data read / write
6	E	H/L	Enable signal
7	DB0	H/L	Data bus line
8	DB1	H/L	Data bus line
9	DB2	H/L	Data bus line
10	DB3	H/L	Data bus line
11	DB4	H/L	Data bus line
12	DB5	H/L	Data bus line
13	DB6	H/L	Data bus line
14	DB7	H/L	Data bus line
15	A	+5.0V	Power supply for LED BL (+4.1V/210mA)
16	K	-	Power supply for LED BL (-)

## 9. Block diagram

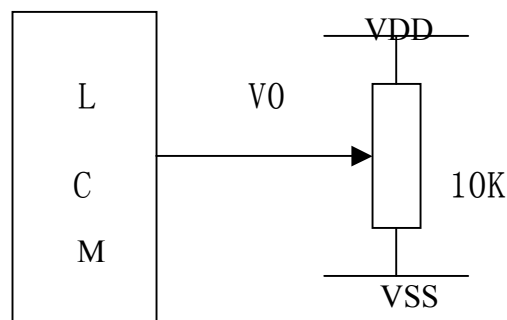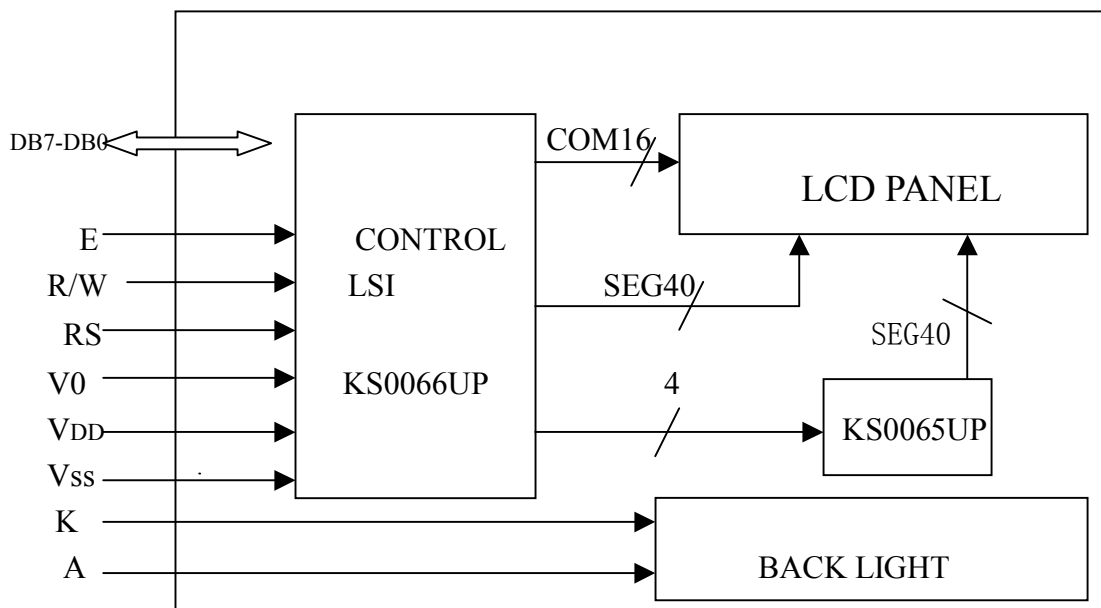


***10.Interface Timing Chart***




AC Characteristics( $V_{DD}=4.5V\sim 5.5V, T_a=-30\sim +85^{\circ}C$  )

Mode	Characteristic	Symbol	Min.	Typ.	Max.	Unit
Write Mode (Refer to Fig-6)	E Cycle Time	$t_c$	500	-	-	ns
	E Rise / Fall Time	$t_R, t_F$	-	-	20	
	E Pulse Width (High, Low)	$t_w$	230	-	-	
	R/W and RS Setup Time	$t_{su1}$	40	-	-	
	R/W and RS Hold Time	$t_{H1}$	10	-	-	
	Data Setup Time	$t_{su2}$	80	-	-	
	Data Hold Time	$t_{H2}$	10	-	-	
Read Mode (Refer to Fig-7)	E Cycle Time	$t_c$	500	-	-	ns
	E Rise / Fall Time	$t_R, t_F$	-	-	20	
	E Pulse Width (High, Low)	$t_w$	230	-	-	
	R/W and RS Setup Time	$t_{su}$	40	-	-	
	R/W and RS Hold Time	$t_H$	10	-	-	
	Data Output Delay Time	$t_D$	-	-	120	
	Data Hold Time	$t_{DH}$	5	-	-	

## Timing Characteristics

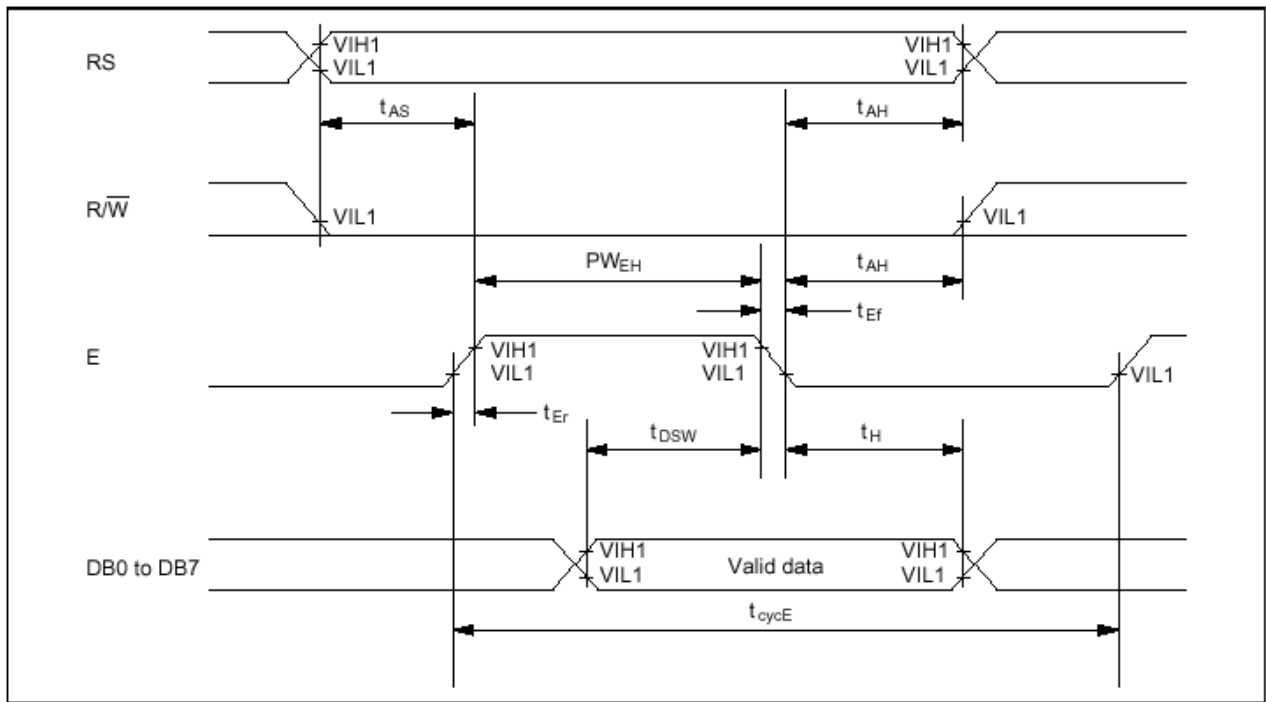

**Write Operation**

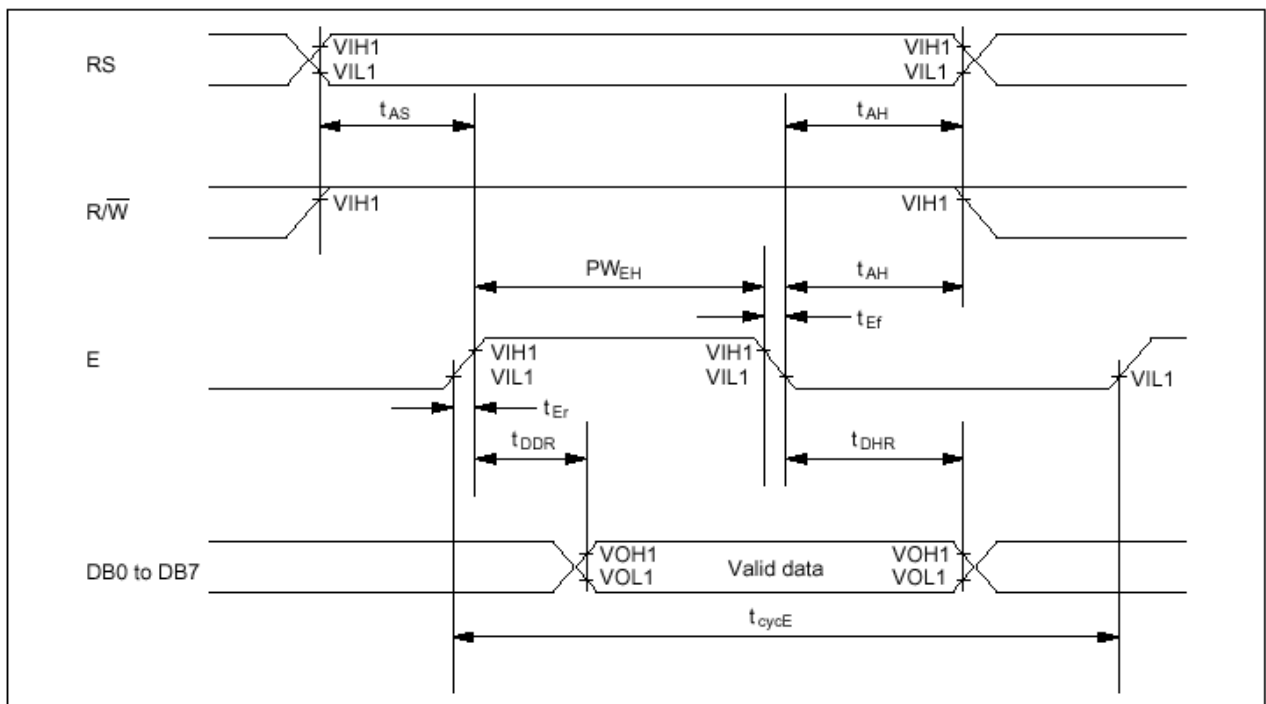

**Read Operation**

## 11. Instruction Code


Instruction Table

Instruction	Instruction Code										Description	Execution time (fosc=270 kHz)	
	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0			
Clear Display	0	0	0	0	0	0	0	0	0	1	Write "20H" to DDRAM and set DDRAM address to "00H" from AC	1.53 ms	
Return Home	0	0	0	0	0	0	0	0	0	1	-	Set DDRAM address to "00H" from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed.	1.53 ms
Entry Mode Set	0	0	0	0	0	0	0	0	1	I/D	SH	Assign cursor moving direction and enable the shift of entire display.	39 μs
Display ON/OFF Control	0	0	0	0	0	0	0	1	D	C	B	Set display(D), cursor(C), and blinking of cursor(B) on/off control bit.	39 μs
Cursor or Display Shift	0	0	0	0	0	0	1	S/C	R/L	-	-	Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.	39 μs
Function Set	0	0	0	0	0	1	DL	N	F	-	-	Set interface data length (DL: 8-bit/4-bit), numbers of display line (N: 2-line/1-line) and, display font type (F:5×11dots/5×8 dots)	39 μs
Set CGRAM Address	0	0	0	1	AC5	AC4	AC3	AC2	AC1	AC0		Set CGRAM address in address counter.	39 μs
Set DDRAM Address	0	0	1	AC6	AC5	AC4	AC3	AC2	AC1	AC0		Set DDRAM address in address counter.	39 μs
Read Busy Flag and Address	0	1	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0		Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.	0 μs
Write Data to RAM	1	0	D7	D6	D5	D4	D3	D2	D1	D0		Write data into internal RAM (DDRAM/CGRAM).	43 μs
Read Data from RAM	1	1	D7	D6	D5	D4	D3	D2	D1	D0		Read data from internal RAM (DDRAM/CGRAM).	43 μs

\* "-": don't care

NOTE: When an MPU program with checking the Busy Flag(DB7) is made, it must be necessary 1/2Fosc is necessary for executing the next instruction by the falling edge of the 'E' signal after the Busy Flag (DB7) goes to "Low".

8-bit interface mode (Condition: fosc = 270KHZ)

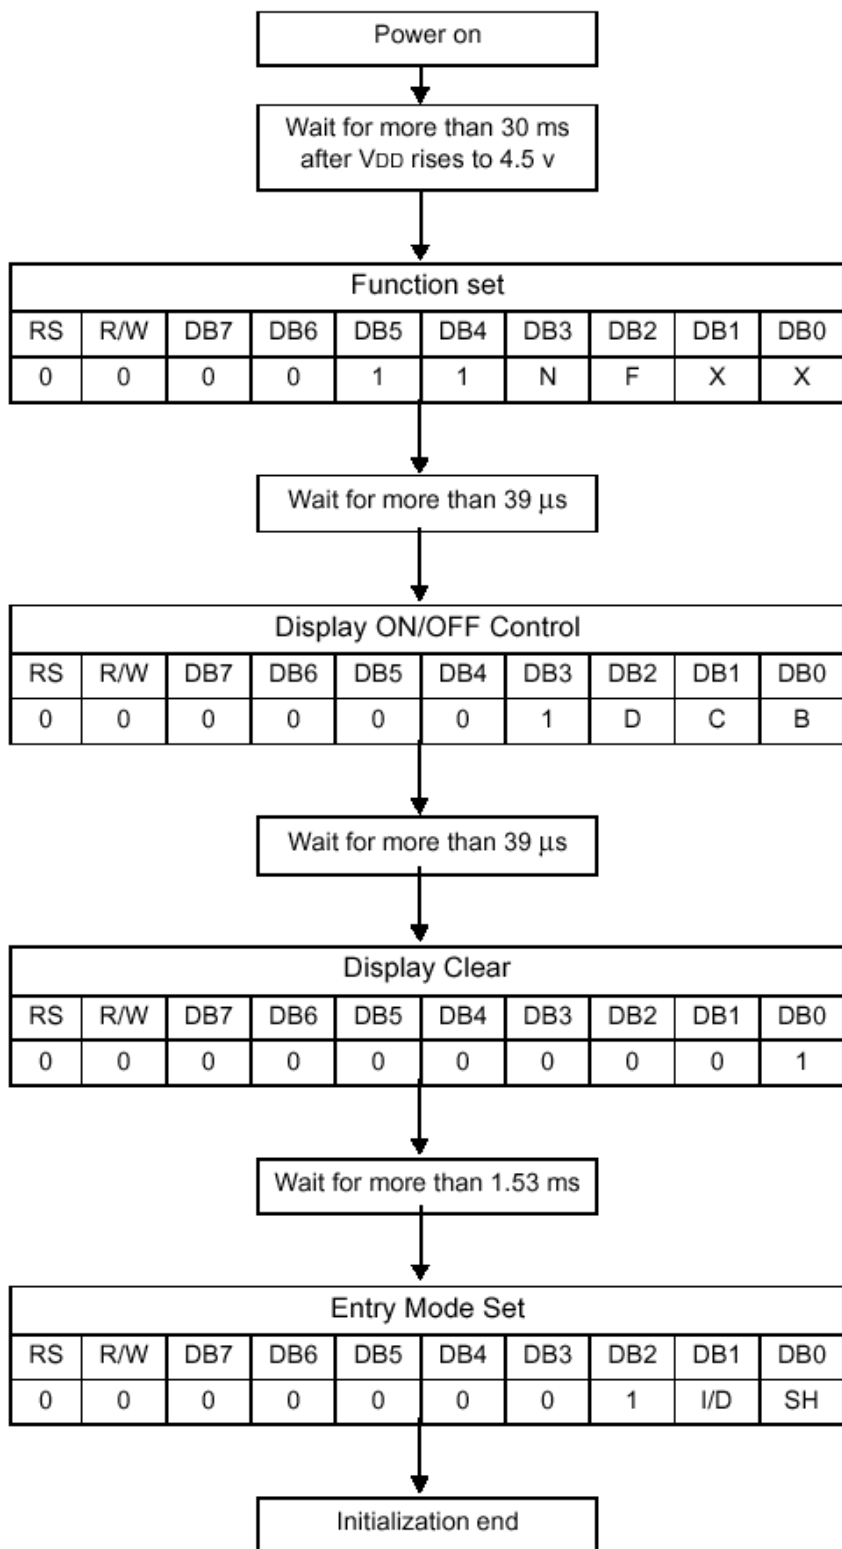

N	0	1-line mode
	1	2-line mode

F	0	display off
	1	display on

D	0	display off
	1	display on

C	0	cursor off
	1	cursor on

B	0	blink off
	1	blink on

I/D	0	decrement mode
	1	increment mode

SH	0	entire shift off
	1	entire shift on

## 12.Character generator ROM

Lower 4 Bits \ Upper 4 Bits	0000	0010	0011	0100	0101	0110	0111	1010	1011	1100	1101	1110	1111
xxxx0000	CG RAM (1)		Ø	Q	P	`	P		一	夕	三	Ω	ρ
xxxx0001	(2)	!	1	A	Q	a	q	。	ア	チ	△	ä	g
xxxx0010	(3)	"	2	B	R	b	r	「	イ	ツ	×	ß	θ
xxxx0011	(4)	#	3	C	S	c	s	」	ウ	テ	モ	ε	ω
xxxx0100	(5)	\$	4	D	T	d	t	、	イ	ト	ト	μ	Ω
xxxx0101	(6)	%	5	E	U	e	u	・	オ	ナ	1	ε	ü
xxxx0110	(7)	&	6	F	V	f	v	ヲ	カ	ニ	ヨ	ρ	Σ
xxxx0111	(8)	'	7	G	W	g	w	ア	キ	ヌ	ラ	g	π
xxxx1000	(1)	(	8	H	X	h	x	イ	ク	ネ	リ	γ	×
xxxx1001	(2)	)	9	I	Y	i	y	ウ	ケ	ル		ˆ	μ
xxxx1010	(3)	*	:	J	Z	j	z	エ	コ	ン	レ	j	κ
xxxx1011	(4)	+	;	K	C	k	c	オ	サ	ヒ	ロ	*	π
xxxx1100	(5)	,	<	L	¥	l	l	ヤ	シ	フ	ワ	φ	μ
xxxx1101	(6)	-	=	M	J	m	n	ユ	ス	ハ	ン	モ	÷
xxxx1110	(7)	.	>	N	^	n	→	ヨ	セ	ホ	〃	ñ	
xxxx1111	(8)	/	?	O	_	o	←	ツ	ソ	マ	°	ö	■