

## GD1SS356 SURFACE MOUNT, BAND SWITCHING DIODE VOLTAGE 35V, CURRENT 0.1A


### Description

The GD1SS356 is designed for high frequency switching application.

### Features

- High reliability
- Small mode type

### Package Dimensions

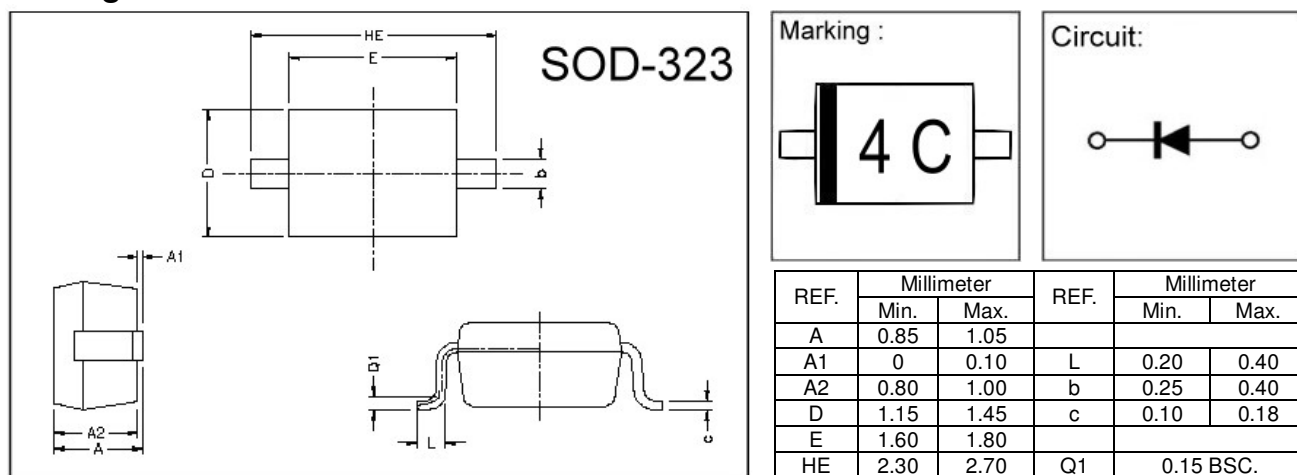

### Absolute Maximum Ratings at Ta = 25°C






Parameter	Symbol	Ratings	Unit
Reverse Voltage(DC)	$V_R$	35	V
Forward Current(DC)	$I_F$	100	mA
Junction Temperature	$T_j$	+125	°C
Storage Temperature	$T_{stg}$	-55 ~ +150	°C
Total Power Dissipation	$P_D$	225	mW

### Electrical Characteristics at Ta = 25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Breakdown	$V_R$	35	-	-	V	$I_R=10\mu A$
Reverse Current(DC)	$I_R$	-	-	10	nA	$V_R=25V$
Reverse Voltage(DC)	$V_F$	-	-	1	V	$I_F=10mA$
Diode Capacitance	$C_D$	-	0.9	1.2	pF	$V_R=6, f=1MHz$
Forward dynamic resistance	$r_f$	-	0.65	0.9	$\Omega$	$I_F=2mA, f=100MHz$

Note 1: Rated input/output frequency: 100MHz

## Characteristics Curve

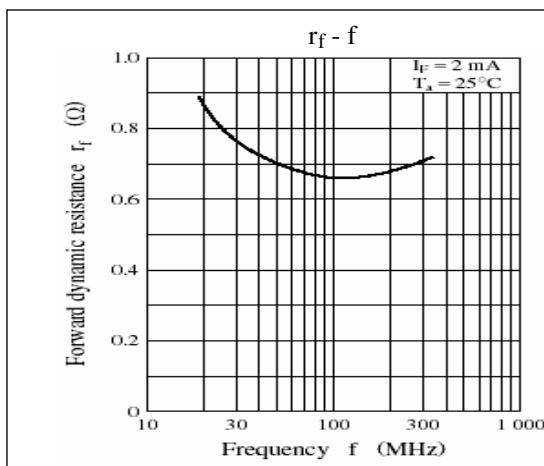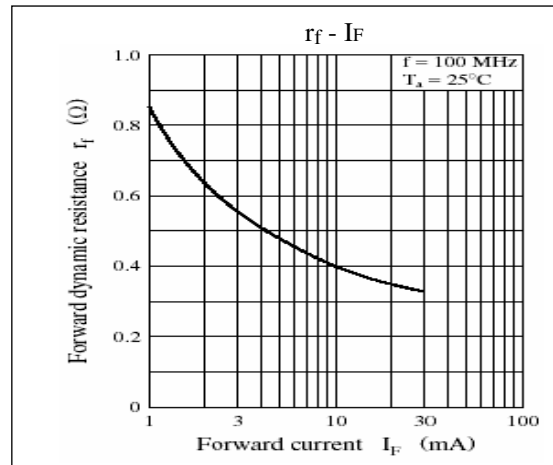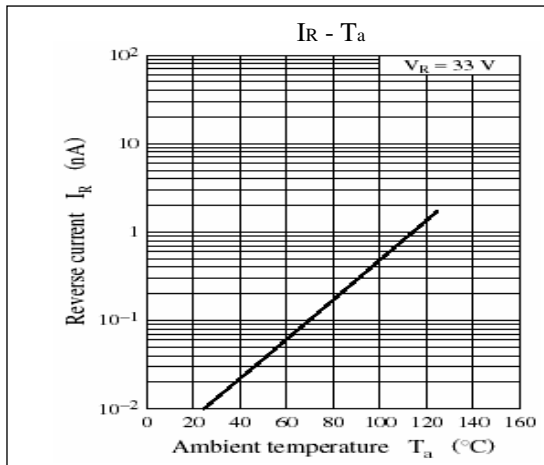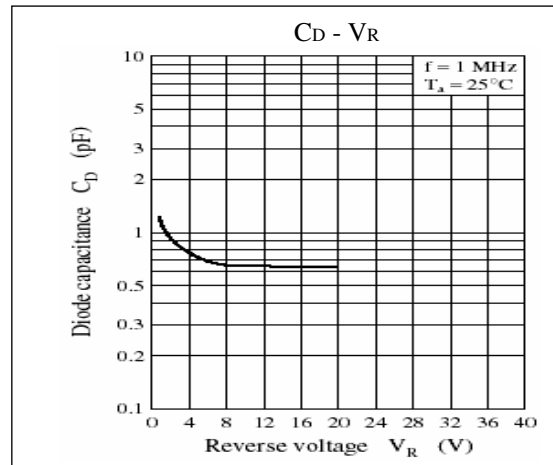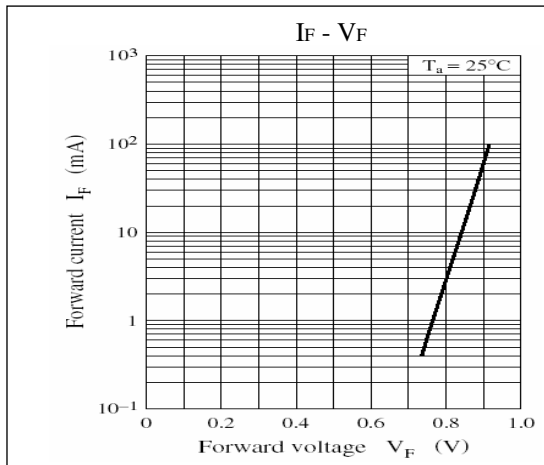

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

**Head Office And Factory:**

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
- TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
- TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165