


### Description

This device contains six independent inverters. It performs the Boolean function  $Y = \bar{A}$ .

卷之三


INPUT	OUTPUT
A	Y
H	L
L	H

## Pin Configuration

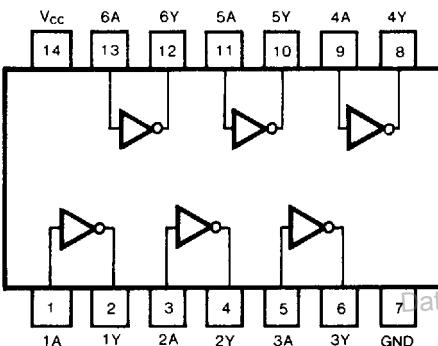

Suffix-Blank. Plastic Dual In Line Package  
Suffix-J . Ceramic Dual In Line Package

### **Circuit Schematic (each inverter)**

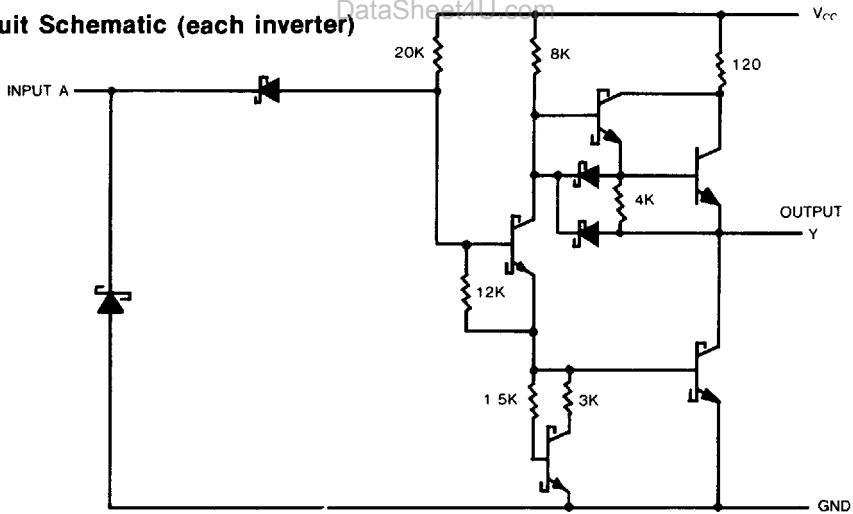

### Absolute Maximum Ratings

- |  |            |                |
|--|------------|----------------|
| • Supply voltage, V <sub>CC</sub>      | .....      | 7V             |
| • Input voltage                        | .....      | 7V             |
| • Operating free-air temperature range | 54LS ..... | -55°C to 125°C |
|  | 74LS ..... | 0°C to 70°C    |
| • Storage temperature range            | .....      | -65°C to 150°C |

## Recommended Operating Conditions

SYMBOL	PARAMETER		MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage	54	4.5	5	5.5	V
		74	4.75	5	5.25	
$I_{OH}$	High-level output current	54,74			-400	$\mu A$
$I_{OL}$	Low-level output current	54			4	mA
		74			8	
$T_A$	Operating free-air temperature	54	-55		125	$^{\circ}C$
		74	0		70	

**Electrical Characteristics** over recommended operating free air temperature (unless otherwise noted)

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP (Note 1)	MAX	UNIT	
$V_{IH}$	High-level input voltage			2		V	
$V_{IL}$	Low-level input voltage		54		0.7	V	
			74		0.8		
$V_{IK}$	Input clamp voltage	$V_{CC}=\text{Min}$ , $I_i = -18\text{mA}$			-1.5	V	
$V_{OH}$	High-level output voltage	$V_{CC}=\text{Min}$ , $V_{IL}=\text{Max}$ $I_{OH}=\text{Max}$	54	2.5	3.4	V	
			74	2.7	3.4		
$V_{OL}$	Low-level output voltage	$V_{CC}=\text{Min}$ $I_{OL}=4\text{mA}$ $V_{IH}=\text{Min}$ $I_{OL}=8\text{mA}$	54,74	0.25	0.4	V	
			74	0.35	0.5		
$I_i$	Input current at maximum input voltage	$V_{CC}=\text{Max}$ , $V_i=7\text{V}$			0.1	$\text{mA}$	
$I_{IH}$	High-level input current	$V_{CC}=\text{Max}$ , $V_i=2.7\text{V}$			20	$\mu\text{A}$	
$I_{IL}$	Low-level input current	$V_{CC}=\text{Max}$ , $V_i=0.4\text{V}$			-0.4	$\text{mA}$	
$I_{OS}$	Short-circuit output current	$V_{CC}=\text{Max}$ (Note 2)		-20	-100	$\text{mA}$	
$I_{CCH}$	Supply current	Total with outputs high	$V_{CC}=\text{Max}$		1.2	2.4	$\text{mA}$
$I_{CCL}$		Total with outputs low	$V_{CC}=\text{Max}$		3.6	6.6	$\text{mA}$

Note 1: All typical values are at  $V_{CC}=5\text{V}$ ,  $T_A=25^{\circ}\text{C}$ .

Note 2: Not more than one output should be shorted at a time, and duration should not exceed one second.

## Switching Characteristics, $V_{CC}=5\text{V}$ , $T_A=25^{\circ}\text{C}$

SYMBOL	PARAMETER	TEST CONDITION#	MIN	TYP	MAX	UNIT
$t_{PLH}$	Propagation delay time, low-to-high-level output	$C_L=15\text{pF}$ , $R_L=2\text{k}\Omega$		9	15	ns
	Propagation delay time, high-to-low-level output			10	15	ns

\*For load circuit and voltage waveforms, see page 3-11.