




HIGH SPEED NPN POWER DARLINGTON TRANSISTORS

**GE10015,16,
20,21,22,23**

**500 VOLTS
40-60 AMPS, 250 WATTS**

These devices are designed for use in high speed switching applications, such as off-line switching power supplies, AC & DC motor control, UPS systems, ultra sonic equipment and other high frequency power conversion equipment.




DEVICE CIRCUIT



CASE STYLE TO-204AE (TO-3)

DIMENSIONS ARE IN INCHES AND (MILLIMETERS)

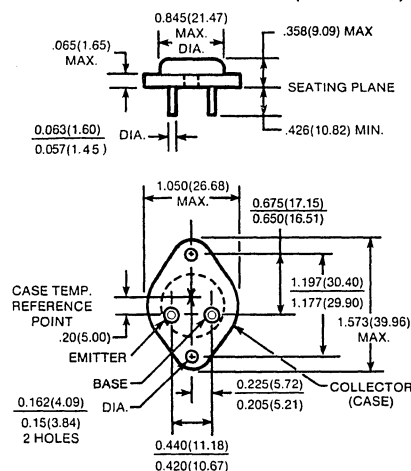

absolute maximum ratings (25°C) (unless otherwise specified)

Voltages	Symbol	GE 10015	GE 10016	GE 10020	GE 10021	GE 10022	GE 10023	Units
Collector Emitter	$V_{CEO(SUS)}$	400	500	200	250	350	400	Volts
Collector Emitter	V_{CEV}	600	700	300	350	450	600	Volts
Emitter Base	V_{EBO}	8.0	8.0	8.0	8.0	8.0	8.0	Volts

Currents

Collector Current (continuous)	I_C	50	50	60	60	40	40	Amps
Collector Current (peak)	I_{CM}	75	75	100	100	60	60	Amps
Base Current (continuous)	I_B	10	10	20	20	20	20	Amps
Base Current (peak)	I_{BM}	15	15	30	30	30	30	Amps

Power Dissipation

Power Dissipation	$P_D(T_C = 25^\circ C)$	250	250	250	250	250	250	Watts
Power Dissipation	$P_D(T_C = 100^\circ C)$	143	143	143	143	143	143	Watts
	Derate above 25°C	1.43	1.43	1.43	1.43	1.43	1.43	W/°C

Temperatures

Storage and Junction	T_{stg} and T_J	-65 to +200	-65 to +200	-65 to +200	-65 to +200	-65 to +200	-65 to +200	°C
Soldering ¹	T_L^1	+275	+275	+275	+275	+275	+275	°C
Thermal Resistance	$R_{\theta JC}$	0.7	0.7	0.7	0.7	0.7	0.7	°C/Watt

1) Max. lead temperature for soldering purposes 1/8" from case for 5 seconds.

device electrical characteristics

(Test Conditions in Next Section; $T_C = 25^\circ\text{C}$ Except as Notes)

STATIC		GE 10015	GE 10016	GE 10020	GE 10021	GE 10022	GE 10023	Units
(1) $V_{CEO(SUS)}$	Min.	400	500	200	250	350	400	Volts
(2) I_{CEV} $I_{CEV} (T_C = 150^\circ\text{C})$	Max.	.25	.25	.25	.25	.25	.25	mA
	Max.	5.00	5.00	5.00	5.00	5.00	5.00	mA
(3) I_{EBO}	Max.	350	350	175	175	175	175	mA
(4) $I_{s/b}$	See Figure	13	13	14	14	15	15	
(5) h_{FE}	Min.	25	25	75	75	50	50	
	Max.	—	—	1000	1000	600	600	
(6) h_{FE}	Min.	10	10	—	—	—	—	
	Max.	—	—	—	—	—	—	
(7) $V_{CE(SAT)}$	Max.	2.2	2.2	2.2	2.2	2.2	2.2	Volts
(8) $V_{CE(SAT)}$	Max.	5	5	4	4	5	5	Volts
(9) $V_{CE(SAT)}$	Max.	2.5	2.5	2.4	2.4	2.5	2.5	Volts
(10) $V_{BE(SAT)}$	Max.	2.75	2.75	3.00	3.00	2.5	2.5	Volts
(11) $V_{BE(SAT)}, (T_C = 100^\circ\text{C})$	Max.			3.5	3.5	2.5	2.5	Volts
(12) DIODE V_F	Typ.	1.9	1.9	2.1	2.1	1.9	1.9	Volts
	Max.	5.0	5.0	5.0	5.0	5.0	5.0	Volts

DYNAMIC

OUTPUT CAPACITANCE ($V_{CB} = 10\text{V}, I_E = 0, f_{TEST} = 1\text{MHz}$)	Typ.	580	580	580	580	580	580	pF
	Max.	750	750	750	750	750	750	pF

SWITCHING

(1) Resistive	t_d	Typ.	.09	.09	.095	.095	.09	.09	μs
		Max.	.30	.30	.20	.20	.25	.25	μs
	t_r	Typ.	.20	.20	.32	.32	.20	.20	μs
		Max.	1.00	1.00	1.00	1.00	1.00	1.00	μs
	t_s	Typ.	1.45	1.45	1.50	1.50	1.45	1.45	μs
		Max.	2.5	2.5	3.5	3.5	2.5	2.5	μs
	t_f	Typ.	.25	.25	.30	.30	.25	.25	μs
		Max.	1.0	1.0	.50	.50	.90	.90	μs
(2) Inductive ($T_C = 100^\circ\text{C}$)	t_s	Typ.	2.8	2.8	2.7	2.7	2.8	2.8	μs
		Max.	—	—	4.5	4.5	5.0	5.0	μs
	t_f	Typ.	.21	.21	.30	.30	.21	.21	μs
		Max.	—	—	1.0	1.0	1.0	1.0	μs
	t_c	Typ.	.68	.68	.85	.85	.68	.68	μs
		Max.	—	—	2.0	2.0	2.0	2.0	μs
(3) Inductive ($T_C = 25^\circ\text{C}$)	t_s	Typ.	1.6	1.6	1.8	1.8	1.6	1.6	μs
		Max.	3.0	3.0	—	—	—	—	μs
	t_f	Typ.	.10	.10	.12	.12	.10	.10	μs
		Max.	.50	.50	—	—	—	—	μs
	t_c	Typ.	.30	.30	.40	.40	.30	.30	μs
		Max.	1.0	1.0	—	—	—	—	μs

TEST CONDITIONS

STATIC

(1) $V_{CEO(SUS)}$ $I_C = 100mA$, $V_{CLAMP} = V_{CEO \text{ Rated}}$	APPLIES TO All
(2) I_{CEV} $V_{CEV} = \text{Rated Valve}$, $V_{BE} = -1.5V$	APPLIES TO All
(3) I_{EBO} $I_{EB} = 2.0 \text{ Volts}$	APPLIES TO All
(4) $I_{s/b}$ SEE APPROPRIATE FORWARD BIAS SECOND BREAKDOWN FIGURE	
(5) h_{FE} (a) $I_C = 10A$, $V_{CE} = 5V$ (b) $I_C = 15A$, $V_{CE} = 5V$ (c) $I_C = 20A$, $V_{CE} = 5V$	APPLIES TO GE10022, 23 GE10020, 21 GE10015, 16
(6) h_{FE} $I_C = 40A$, $V_{CE} = 5V$	APPLIES TO GE10015, 16
(7) $V_{CE(SAT)}$ (a) $I_C = 20A$, $I_B = 1A$ (b) $I_C = 30A$, $I_B = 1.2A$	APPLIES TO GE10015, 16, 22, 23 GE10020, 21
(8) $V_{CE(SAT)}$ (a) $I_C = 40A$, $V_{CE} = 5V$ (b) $I_C = 50A$, $V_{CE} = 10V$ (c) $I_C = 60A$, $V_{CE} = 5V$	APPLIES TO GE10022, 23 GE10015, 16 GE10020, 21
(9) $V_{CE(SAT)}$ (a) $I_C = 20A$, $I_B = 1A$ (b) $I_C = 30A$, $I_B = 1.2A$	APPLIES TO GE10015, 16, 22, 23 GE10020, 21
(10) $V_{BE(SAT)}$ (a) $I_C = 20A$, $I_B = 1A$ (b) $I_C = 30A$, $I_B = 1.2A$	APPLIES TO GE10015, 16, 22, 23 GE10020, 21
(11) $V_{BE(SAT)}$ SAME AS (10) BUT $T_C = 100^\circ C$	
(12) DIODE V_F (a) $I_F = 20A$ (b) $I_F = 30A$	APPLIES TO GE10015, 16, 22, 23 GE10020, 21

SWITCHING

(1) RESISTIVE $t_p = 50\mu s$, Duty Cycle $\leq 2\%$ a) $V_{CC} = 250V$, $I_C = 20A$, $I_{B1} = 1A$, $I_{B2} = 4A$ b) $V_{CC} = 175V$, $I_C = 30A$, $I_{B1} = 1A$, $I_{B2} = 4A$	APPLIES TO GE10015, 16, 22, 23 GE10020, 21
(2) INDUCTIVE $L = 100\mu h$, $I_{B1} = 1A$, $I_{B2} = 4A$, $T_C = 100^\circ C$ a) $I_C = 20A$, $V_{CLAMP} = 250V$ b) $I_C = 30A$, $V_{CLAMP} = 175V$	APPLIES TO GE10015, 16, 22, 23 GE10020, 21
(3) INDUCTIVE SAME AS (2), BUT $T_C = 25^\circ C$	

NOTE: See FIGURE 22 for Switching Time Test Circuit.

TYPICAL CHARACTERISTICS

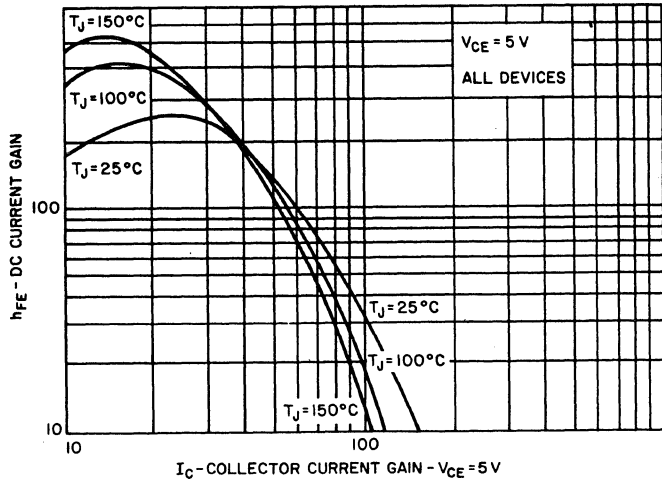


FIGURE 1. DC CURRENT GAIN ($V_{CE} = 5\text{ V}$)

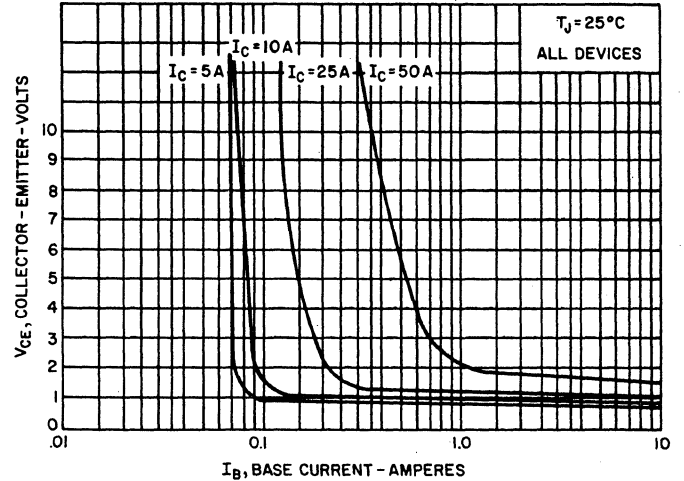


FIGURE 2. COLLECTOR SATURATION REGION

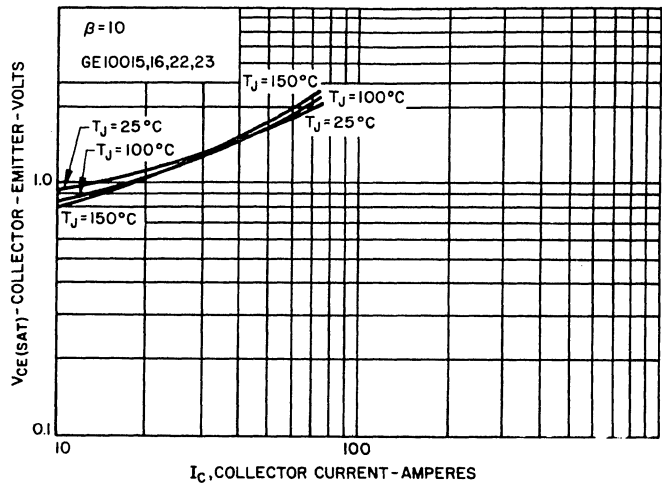


FIGURE 3. $V_{CE}(\text{SAT})$ VS I_C

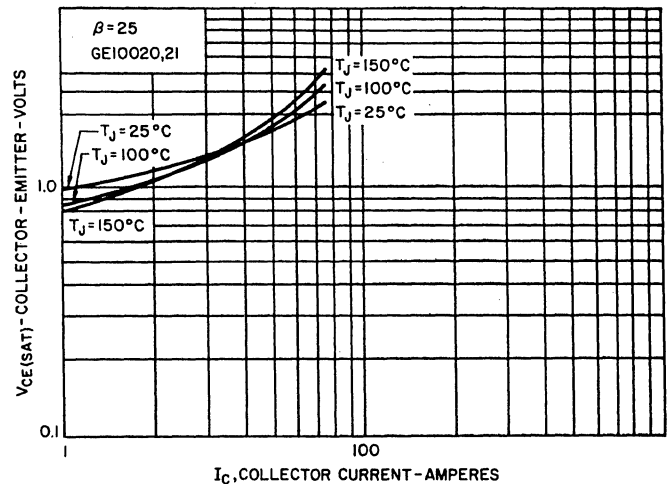


FIGURE 4. $V_{CE}(\text{SAT})$ VS I_C

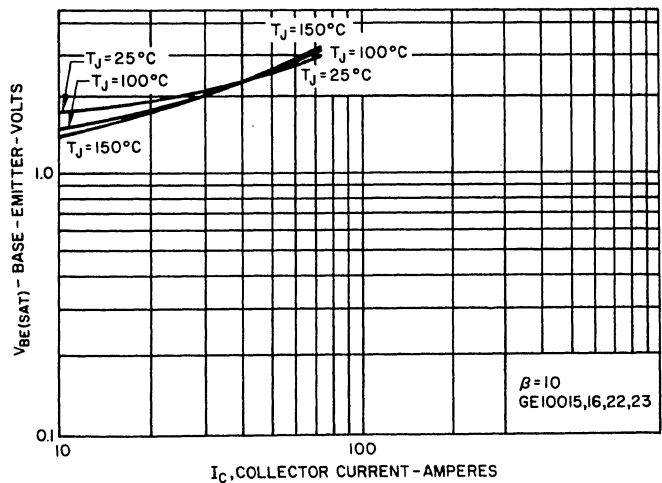


FIGURE 5. $V_{BE}(\text{SAT})$ VS I_C

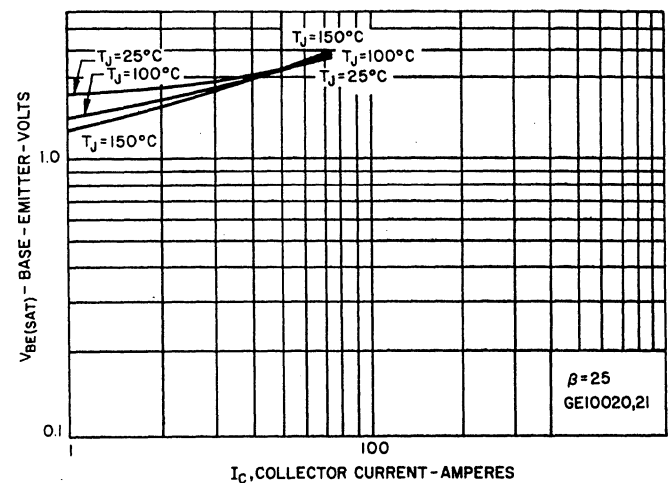


FIGURE 6. $V_{BE}(\text{SAT})$ VS I_C

TYPICAL CHARACTERISTICS

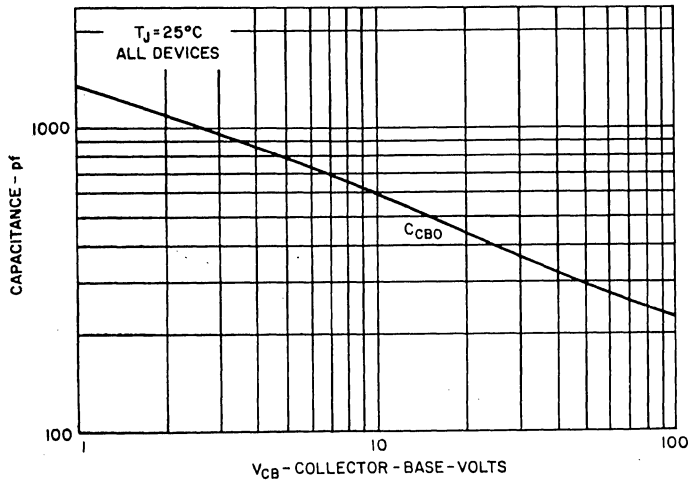


FIGURE 7. CAPACITANCE (C_{CBO})

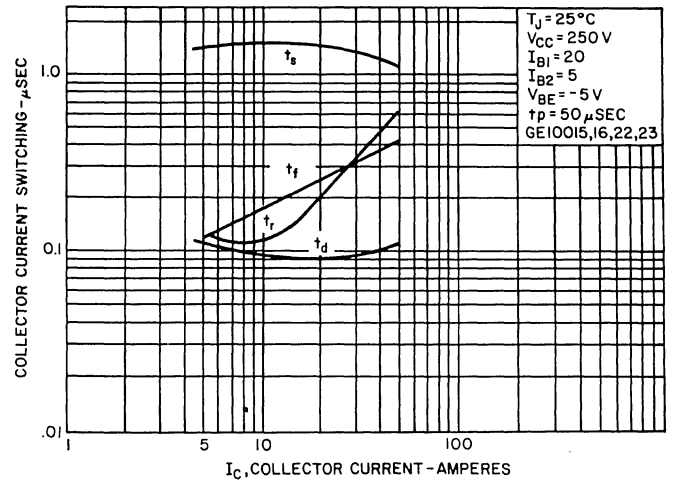


FIGURE 8. RESISTIVE SWITCHING PERFORMANCE

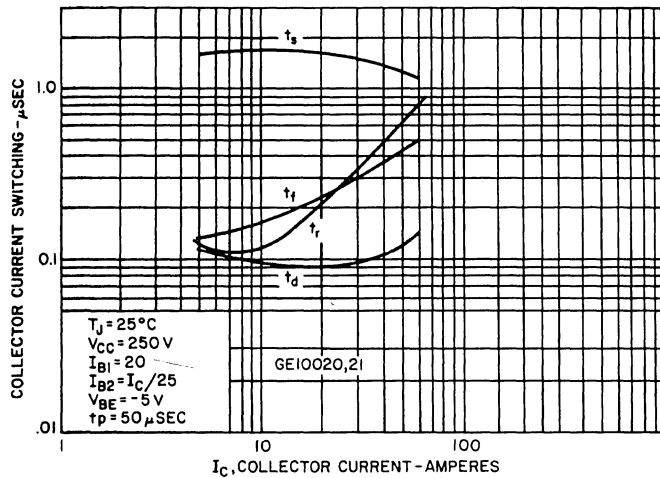


FIGURE 9. RESISTIVE SWITCHING PERFORMANCE

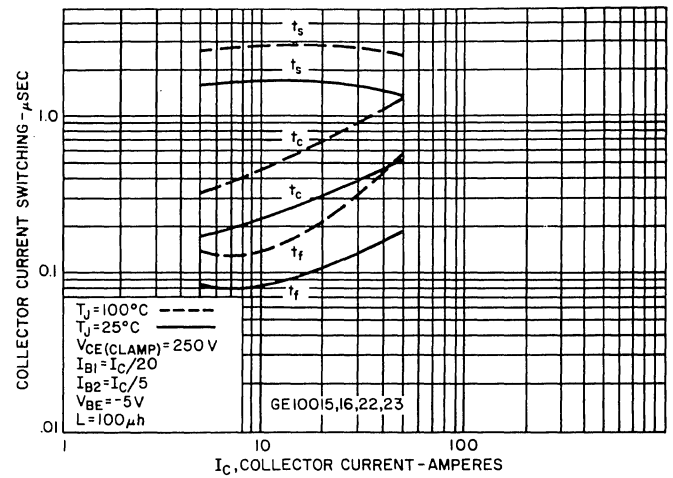


FIGURE 10. INDUCTIVE SWITCHING PERFORMANCE (CLAMPED)

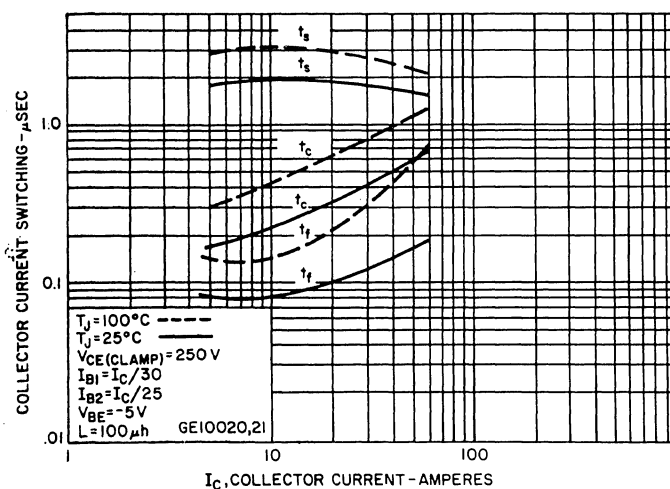


FIGURE 11. INDUCTIVE SWITCHING PERFORMANCE (CLAMPED)

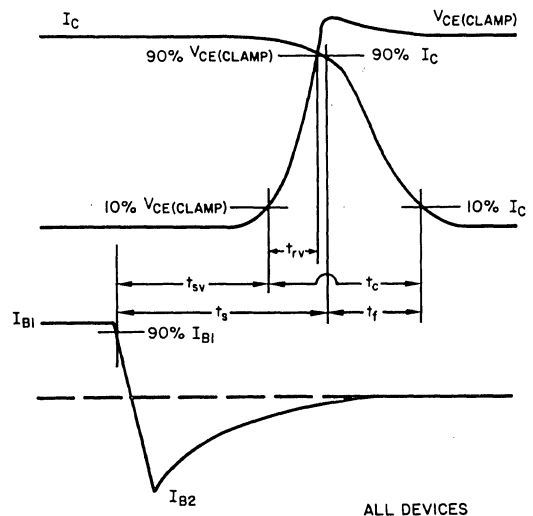


FIGURE 12. INDUCTIVE SWITCHING TURN-OFF WAVEFORMS

TYPICAL CHARACTERISTICS

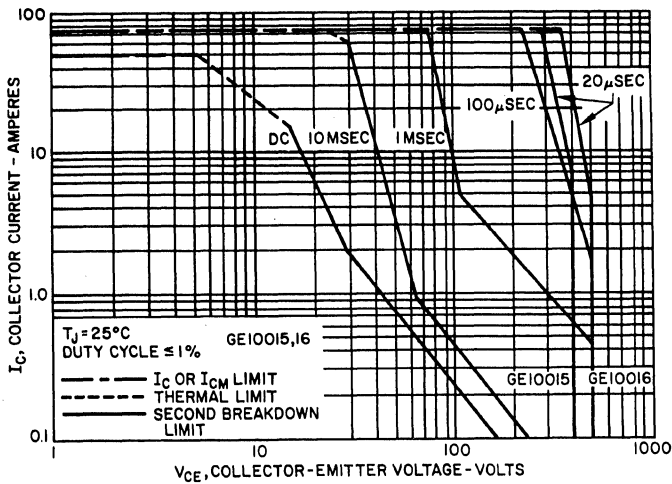


FIGURE 13. FORWARD BIAS SAFE OPERATING AREA

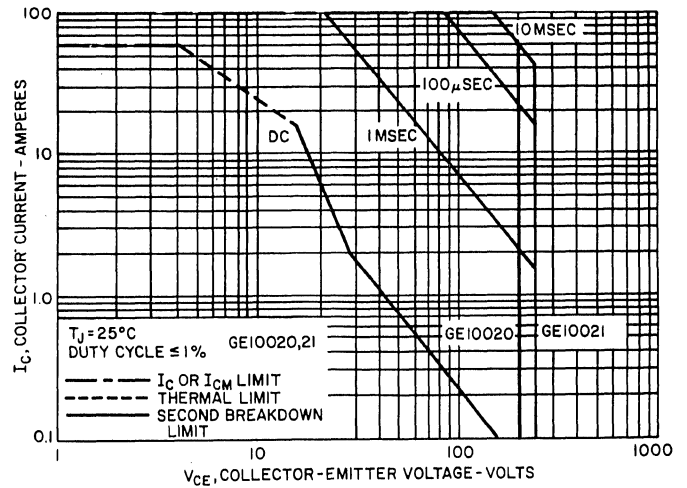


FIGURE 14. FORWARD BIAS SAFE OPERATING AREA

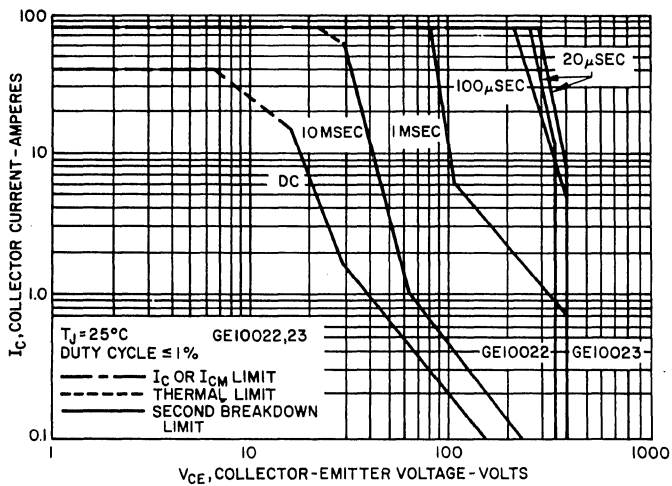


FIGURE 15. FORWARD BIAS SAFE OPERATING AREA

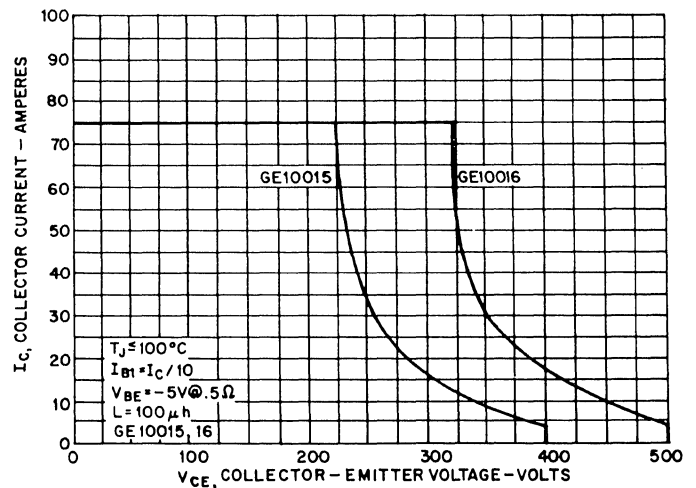


FIGURE 16. FORWARD BIAS SAFE OPERATING AREA (CLAMPED)

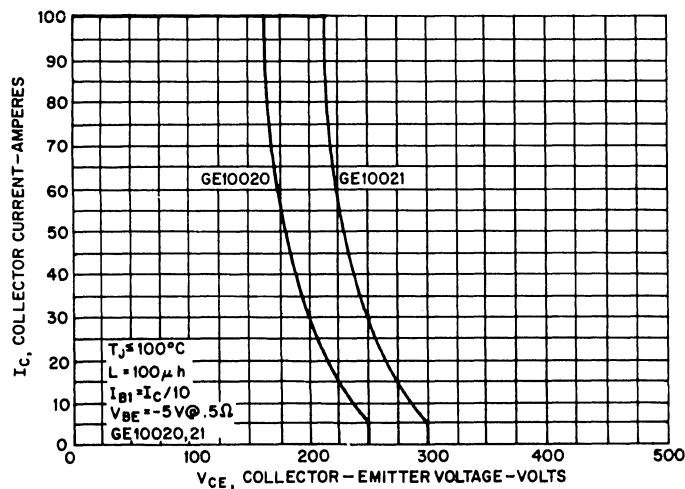


FIGURE 17. REVERSE BIAS SAFE OPERATING AREA

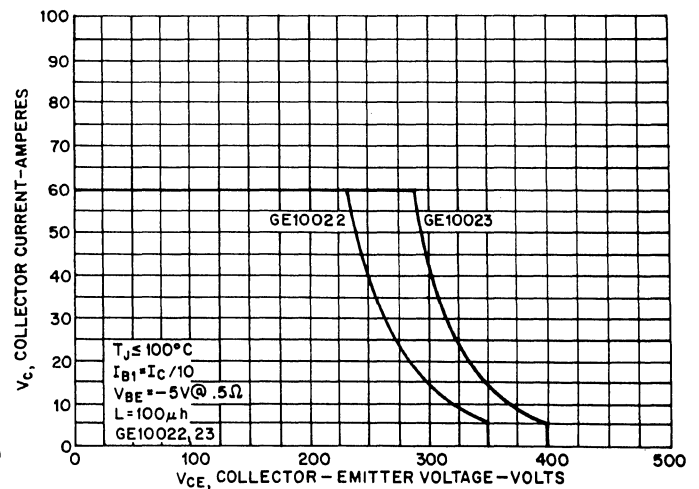


FIGURE 18. REVERSE BIAS SAFE OPERATING AREA (CLAMPED)

TYPICAL CHARACTERISTICS

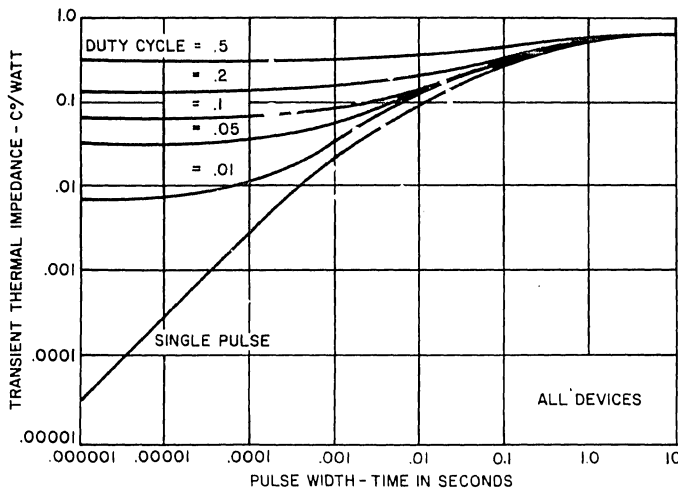


FIGURE 19. TRANSIENT THERMAL RESPONSE

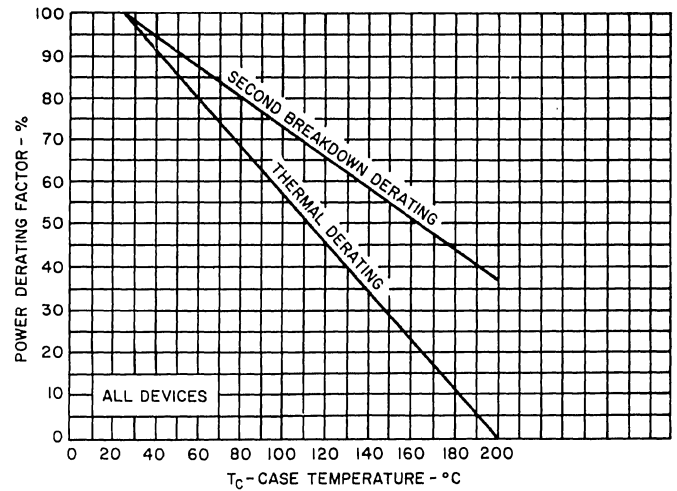


FIGURE 20. POWER DERATING

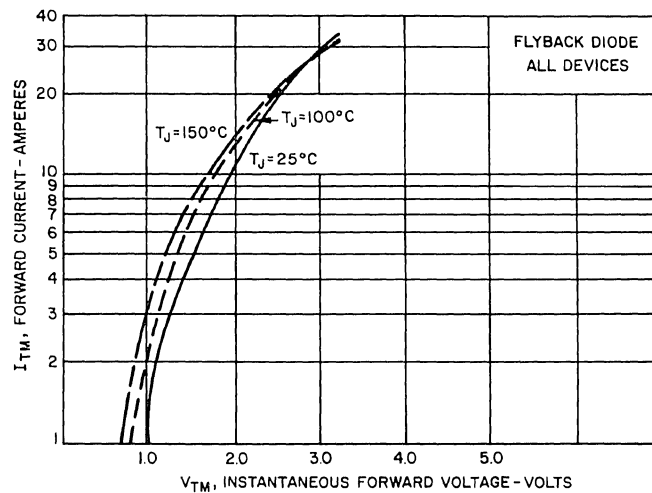


FIGURE 21. FORWARD CHARACTERISTICS

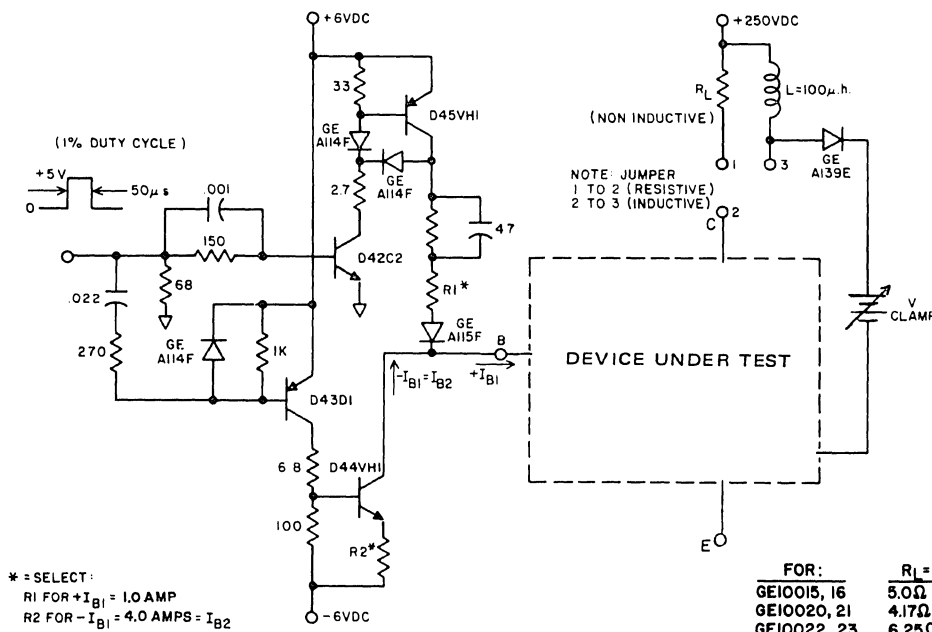


FIGURE 22.
SWITCHING TIME
TEST CIRCUIT