

GFEB4

Europe Wide Band

Inquiry

Application

for Spurious reduction

Characteristics


GFEB4(Bulk Type)	
GFEB4-T(Taping Type)	
Zin/Zout	75 ohm Nominal
Pass Band	65 up to 108MHz
Insertion Loss	3dB max (65 up to 108MHz)
Attenuation	15 dB min (0 up to 20MHz)
	20 dB min (170 up to 220MHz)

Number of ordered pieces


4000pcs/Box

Dimensions

Dimension (Unit : mm)

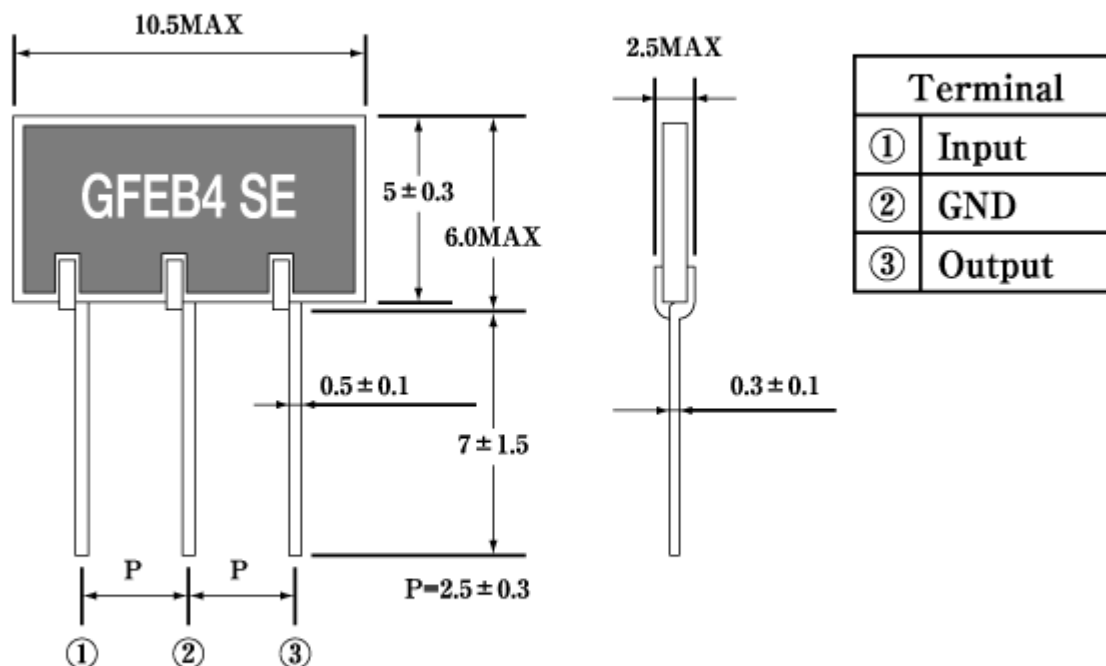

Frequency Data

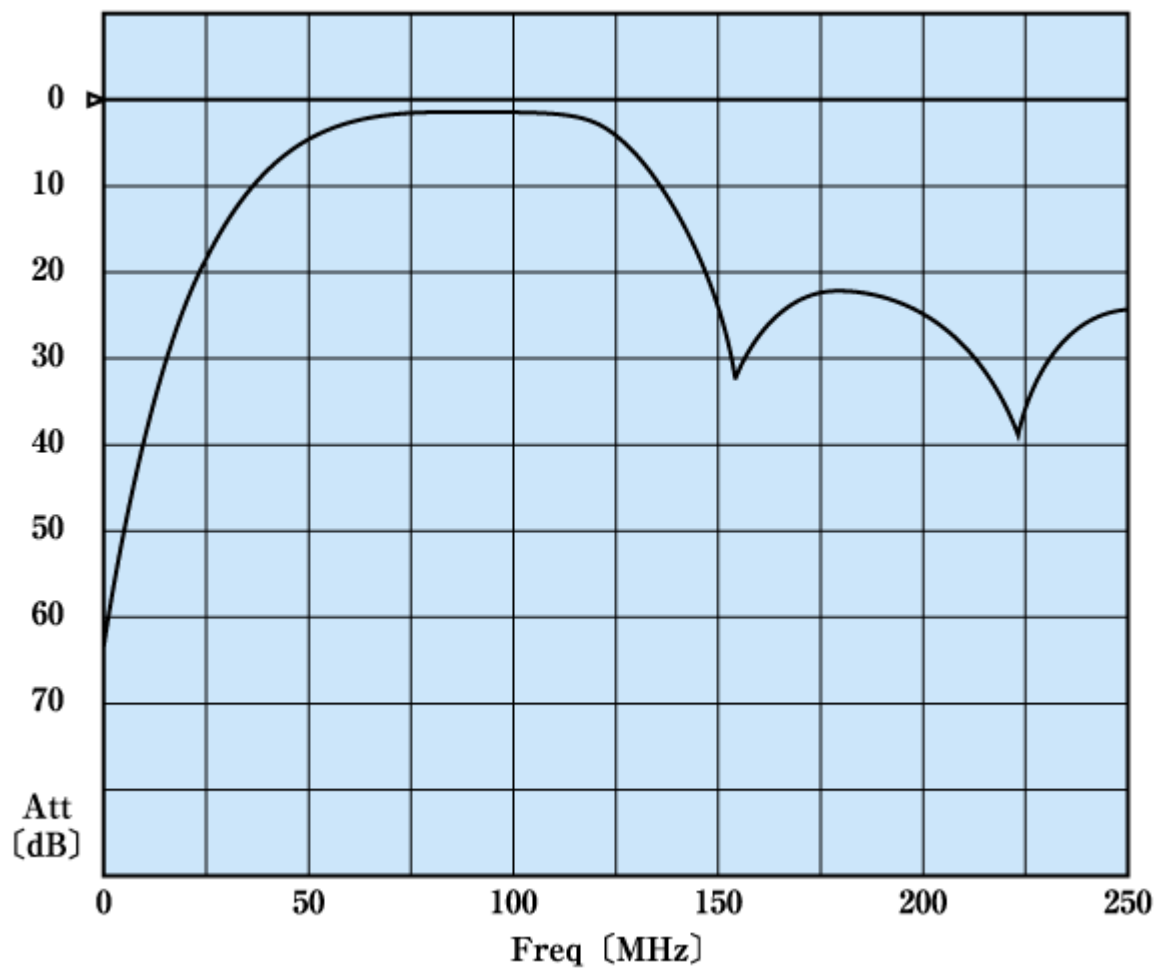

► Products li