

**GFMB1**  
FM US Band

Inquire

**Application**

for Spurious reduction

**Characteristics**


<b>GFMB1</b>	
Zin/Zout	75 ohm Nominal
Pass Band	88 up to 108MHz
Insertion Loss	3.0dB max (88 up to 108MHz)
Ripple	2.0dB max (88 up to 108MHz)
Attenuation	20 dB min ( 0 up to 25MHz)
	20 dB min ( 170 up to 250MHz)

**Number of ordered pieces**

1000pcs/Reel

**Dimensions**

Dimension (Unit : mm)

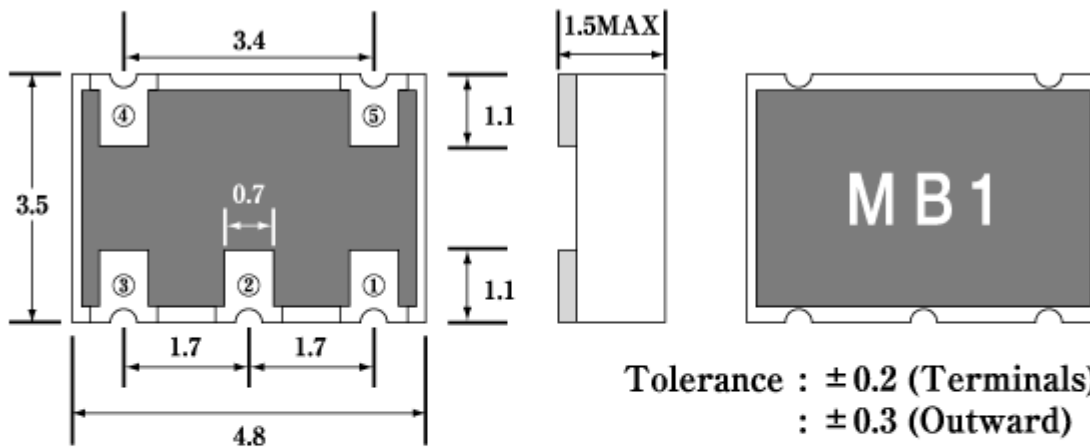

Tolerance :  $\pm 0.2$  (Terminals)  
:  $\pm 0.3$  (Outward)


Terminal	
①	Input
②	GND
③	Output
④	Fixed
⑤	Fixed

**Note**

Do not connect any wiring (inclusive of grounding) to terminals No.4 and No.5.

They are provided solely for internal connections.

### Frequency Data

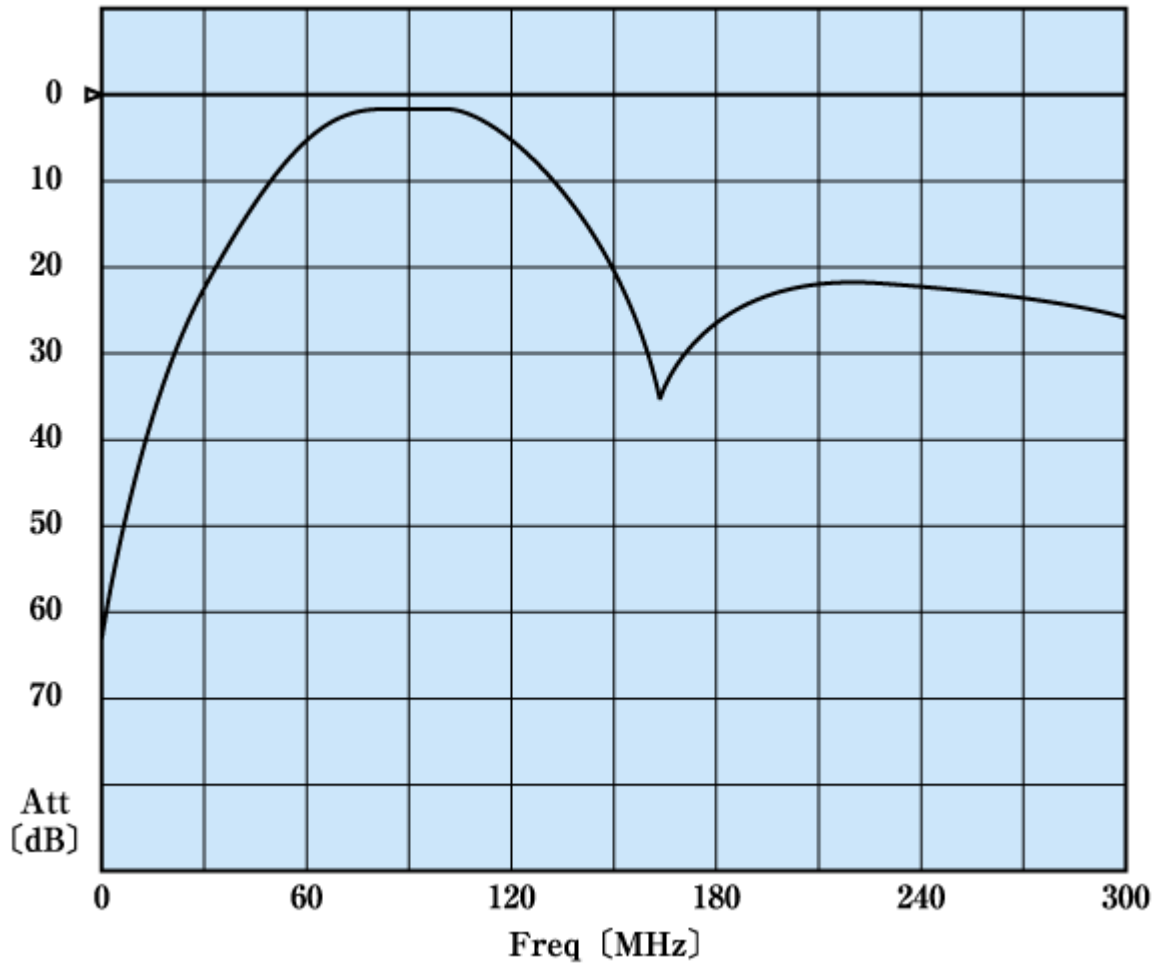

► Products II