

GFMB6
FM US Band

Inquiry

Application

for Spurious reduction

Characteristics


GFMB6(Bulk Type)	
GFMB6-T(Taping Type)	
Zin/Zout	75 ohm Nominal
Pass Band	88 up to 108MHz
Insertion Loss	3dB max (88 up to 108MHz)
Attenuation	20 dB min (0 up to 50MHz)
	20 dB min (170 up to 230MHz)

Number of ordered pieces

4000pcs/Box

Dimensions

Dimension (Unit : mm)

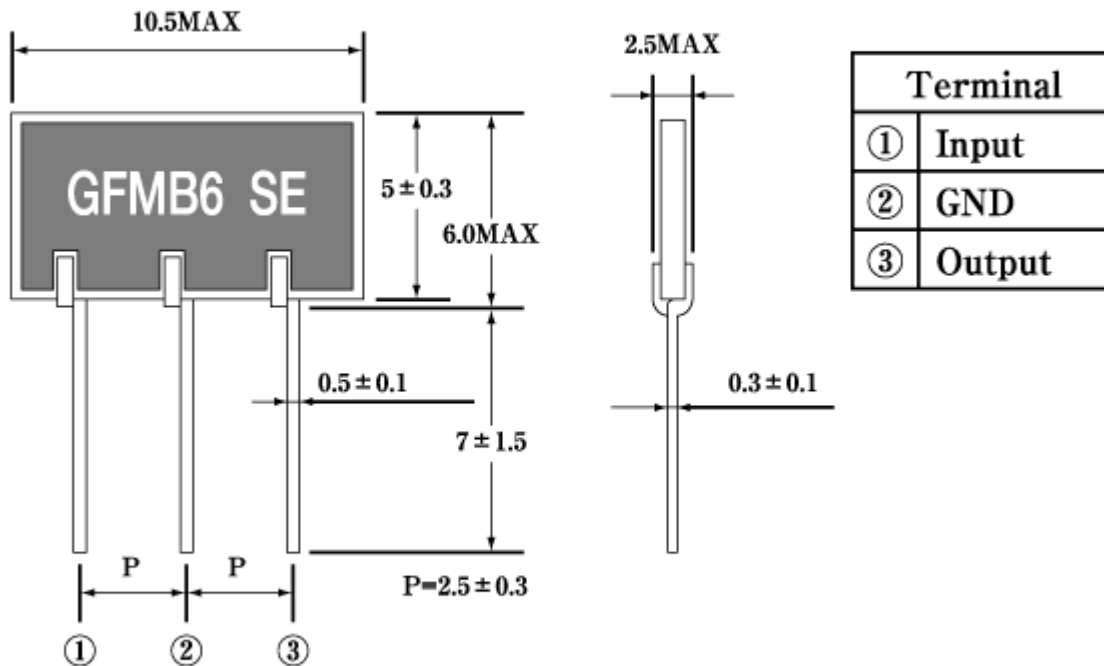

Frequency Data

