

GFWE2

FM US Band (Emitter Grounding)

[Inquiry](#)

Applocation

for Spurious reduction

Characteristics


GFWE2(Bulk Type)	
GFWE2-T(Taping Type)	
Zin	75 ohm Nominal
Zout	180 ohm // 5pF
Pass Band	88 up to 108MHz
Insertion Loss	4dB max (88 up to 108MHz)
Attenuation	20 dB min (0 up to 50MHz)
	20 dB min (170 up to 220MHz)

Number of ordered pieces

4000pcs/Box

Dimensions

Dimension (Unit : mm)

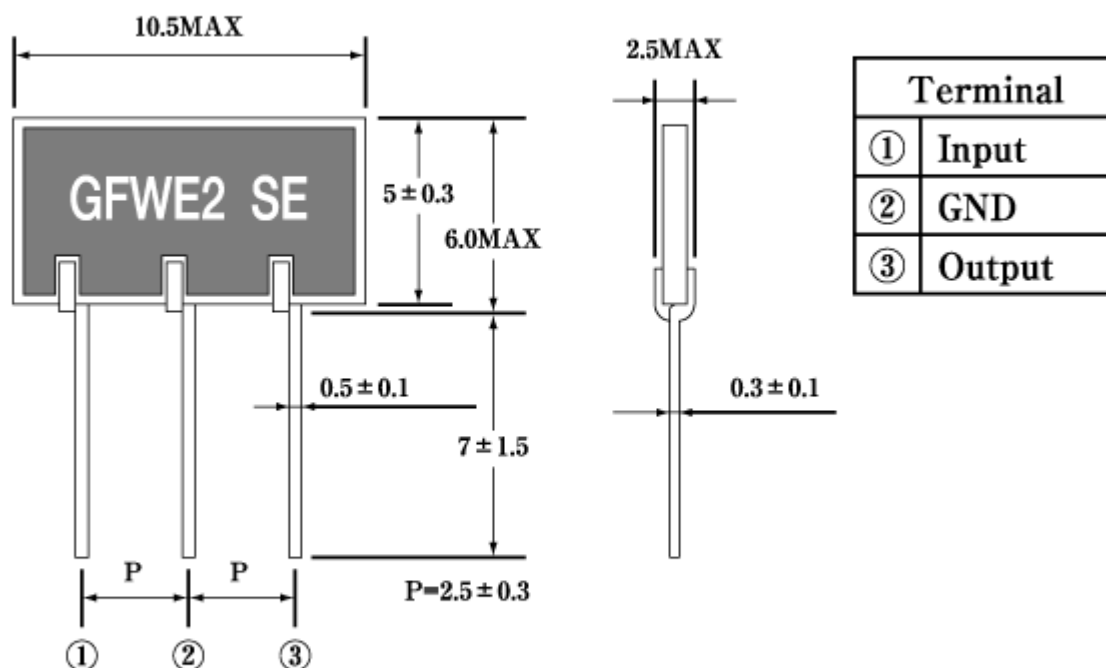

Frequency Data

