

GI32C

PNP EPITAXIAL PLANAR TRANSISTOR


Description

The GI32C is designed for use in general purpose amplifier and switching applications.

Features

*Complementary to GI31C

Package Dimensions

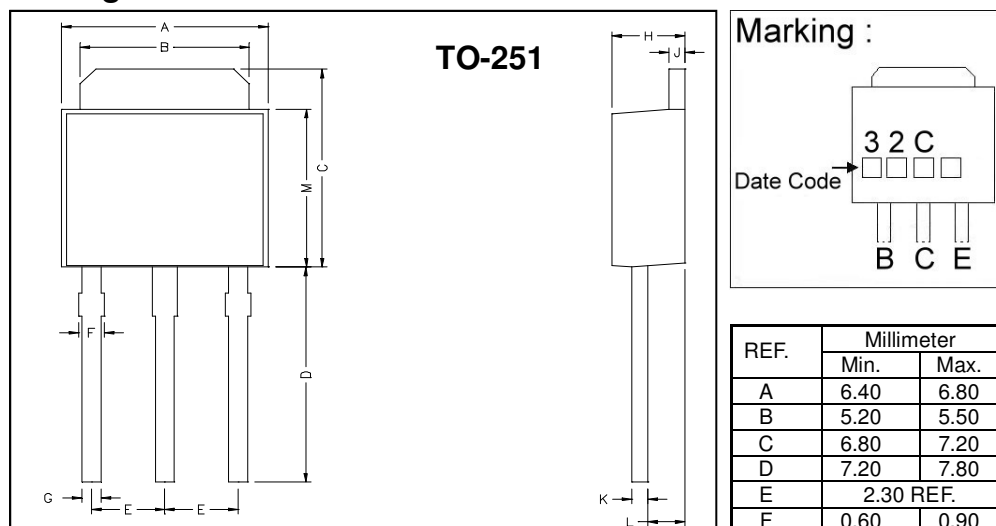

Absolute Maximum Ratings (Ta = 25°C, unless otherwise specified)







Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	V _{CBO}	-100	V
Collector to Emitter Voltage	V _{CEO}	-100	V
Emitter to Base Voltage	V _{EBO}	-5	V
Collector Current (DC)	I _C	-3	A
Collector Current (Pulse)	I _C	-5	A
Junction Temperature	T _j	+150	°C
Storage Temperature	T _{STG}	-55 ~ +150	°C
Total Power Dissipation	P _D	2	W
	P _D (T _C =25°C)	15	W

Electrical Characteristics (Rating at Ta=25°C)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV _{CBO}	-100	-	-	V	I _C =-1mA, I _E =0
BV _{CEO}	-100	-	-	V	I _C =-30mA, I _B =0
BV _{EBO}	-5	-	-	V	I _E =-100uA, I _C =0
I _{CES}	-	-	-20	uA	V _{CE} =-100V, V _{EB} =0V
I _{CEO}	-	-	-50	uA	V _{CE} =-60V, I _B =0
I _{EBO}	-	-	-1	mA	V _{EB} =-5V, I _C =0
*V _{CE(sat)}	-	-	-1.2	V	I _C =-3A, I _B =-375mA
*V _{BE(on)}	-	-	-1.8	V	V _{CE} =-4V, I _C =-3A
*h _{FE1}	25	-	-		V _{CE} =-4V, I _C =-1A
*h _{FE2}	10	-	50		V _{CE} =-4V, I _C =-3A
f _T	3	-	-	MHz	V _{CE} =-10V, I _C =-500mA, f=1MHz

* Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%

Characteristics Curve

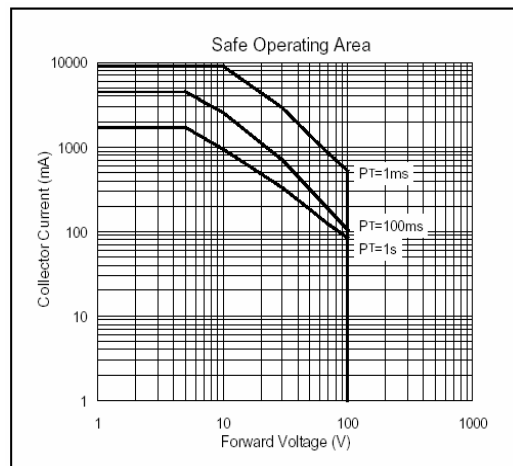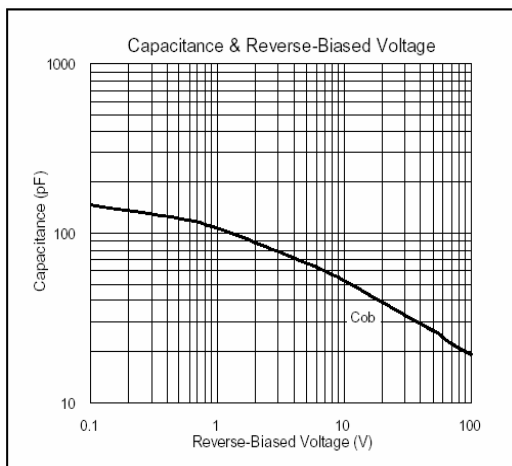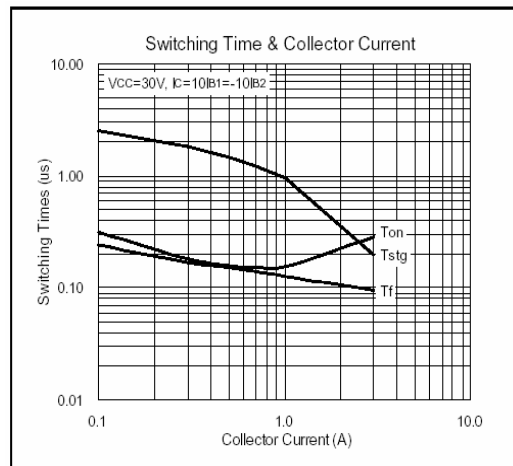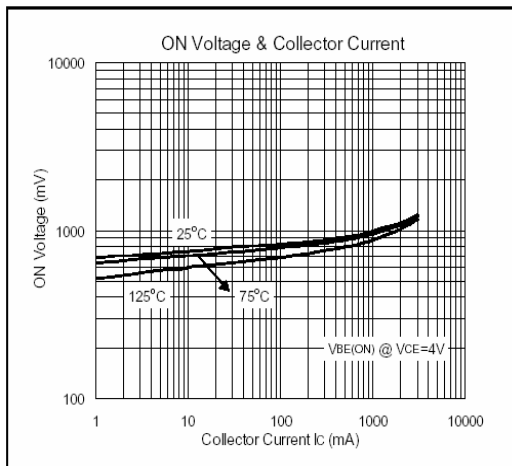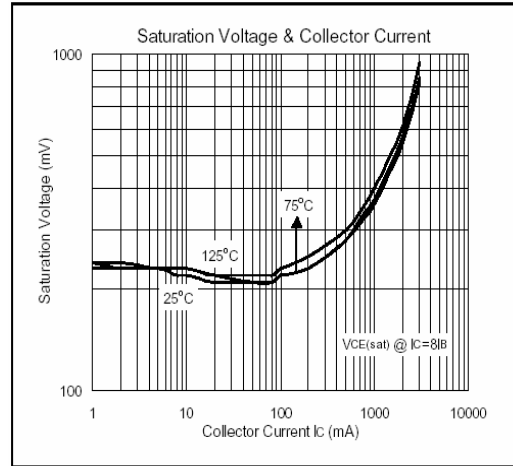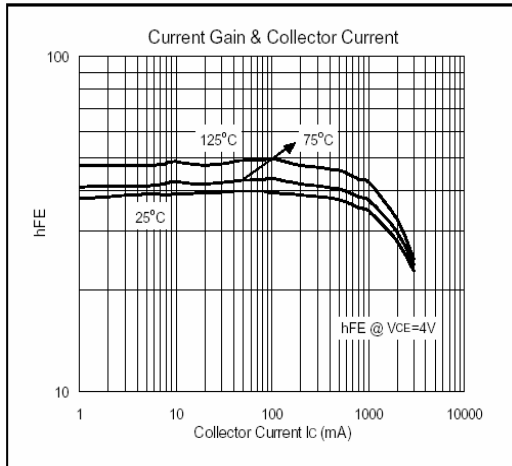

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 FAX : 86-21-38950165